




DS-2CD8133-E(W)(I) Mini Network Camera

- Real time video display at VGA(640×480) resolution
- H.264/MJPEG video compression with high compression ratio
- Mini SD card local storage
- PoE
- Built-in microphone and speaker

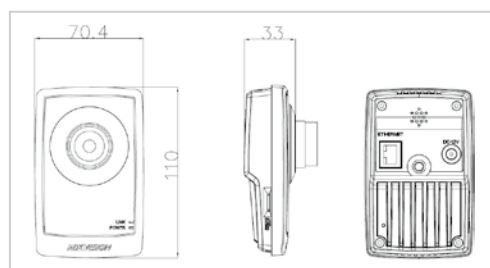

Unit: mm

Specifications

		DS-2CD8133F-E(W)(I)
Camera	Image Sensor	1/3" Progressive CMOS
	Min. Illumination	0.9 Lux @ F1.8; 0.4 Lux @ F1.2 -I:0 Lux with IR ON
	Electronic Shutter	1/25s ~1/100,000s
	Lens	4mm@F1.8, Angle of view: 54.9°
	Lens Mount	C/CS
	Day & Night	Electronic
Compression Standard	Video Compression	H.264/MJPEG
	Bit rate	32 Kbps~8Mbps
	Audio Compression	OggVorbis
Image	Max. Image Resolution	640 x480
	Frame Rate	50HZ: 25fps (640 x480) 60HZ: 30fps (640 x480)
	Image Settings	Saturation, Brightness, Contrast adjustable through client software or web browser
Network	Storage	Support Mini SD, NAS(ISCISI optional)
	Intelligent Alarm	Motion Detection, Storage exception
	Protocols	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, PPPoE, SMTP, NTP (SNMP,HTTPS, FTP, SIP, 802.1x, IPv6 optional)
Interface	Basic	Reset button, Anti-flicker, Dual Stream, Heartbeat, Password Protection, watermark
	Audio	Built-in Microphone and Speaker
General	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet interface
	Operating Condition	-10°C~60°C(14°F~140°F), Humidity 90% or less(non-condensing)
	Power Supply	DC12V±10% / PoE
General	Power Consumption	4W MAX -I: 5W MAX
	IR Range	-I: Within 10 meters (32.8ft)
	Dimension	110×70×33mm(4.33"×2.76"×1.30")
	Weight	250g(0.55lbs)

Available Models

DS-2CD8133F-E, DS-2CD8133F-EW, DS-2CD8133F-EI

*-W: support Wi-Fi function (802.11g)

-I: support infrared LED