




## DS-2CD863PF(NF)-E(W) 1.3 Megapixel CCD-based Network Camera

- Up to 1.3 megapixel resolution
- H.264/MJPEG video compression with high compression ratio
- Progressive scan CCD
- Up to 32 GB SD/SDHC card local storage
- Two-way audio
- PoE

Unit: mm

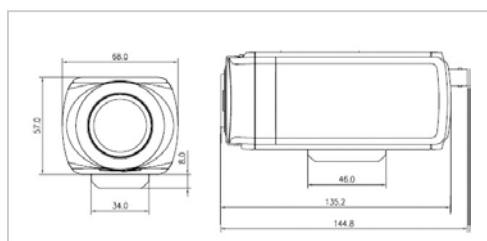

### Specifications

		DS-2CD863PF(NF)-E(W)
Camera	Image Sensor	1/3" SONY Progressive Scan CCD
	Signal System	PAL/NTSC
	Min. Illumination	Color: 0.1Lux @ F1.2 B / W: 0.01Lux @ F1.2
	Electronic Shutter	1/25(1/30)s ~1/100,000s
	Lens Mount	C/CS mount
	Auto Iris	DC Drive
	Day & Night	IR cut filter with auto switch
Compression Standard	Video Compression	H.264/MJPEG
	Bit rate	32 Kbps~16Mbps
	Audio Compression	OggVorbis
Image	Max. Image Resolution	1280 x 960
	Frame Rate	50HZ: 12.5fps(1280×960), 25fps (1280×720) 60HZ: 15fps(1280×960), 30fps (1280×720)
	Image Settings	Saturation, Brightness, Contrast adjustable through client software or web browser
Network	Storage	Support SD/SDHC, NAS(ISCASI optional)
	Intelligent Alarm	Motion Detection, Video Loss, Network Disconnect, IP address conflict, Storage exception
	Protocols	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, PPPoE, SMTP, NTP (SNMP,HTTPS,FTP, SIP, 802.1x, IPv6 optional)
	Basic	Reset button, Anti-flicker, Dual Stream, Heartbeat, Password Protection, watermark
Interface	Audio Input	1 channel microphone input, 3.5mm mini-jack
	Audio Output	1 channel 3.5mm audio interface (Line level, 600Ω)
	Communication Interface	1 RJ45 10M / 100M self-adaptive Ethernet interface and 1 RS-485 interface
	Alarm Input	1 channel
	Alarm Output	1 channel
	Video Output	1Vp-p Composite Output (75Ω/BNC)
General	Operating Condition	-10°C~60°C(14°F~140°F), Humidity 90% or less(non-condensing)
	Power Supply	DC12V±10% / PoE (AC24V optional)
	Power Consumption	7.5W MAX(12.5W MAX with ICR Working)
	Dimension	68×57×144.8mm (2.68"×2.24"×5.70")
	Weight	500g (1.10lbs)

### Available Models

DS-2CD863PF-E, DS-2CD863PF-EW, DS-2CD863NF-E, DS-2CD863NF-EW  
\*-W: support Wi-Fi function (802.11g)