


# DS-4308/4316HFVI-E Compression Card

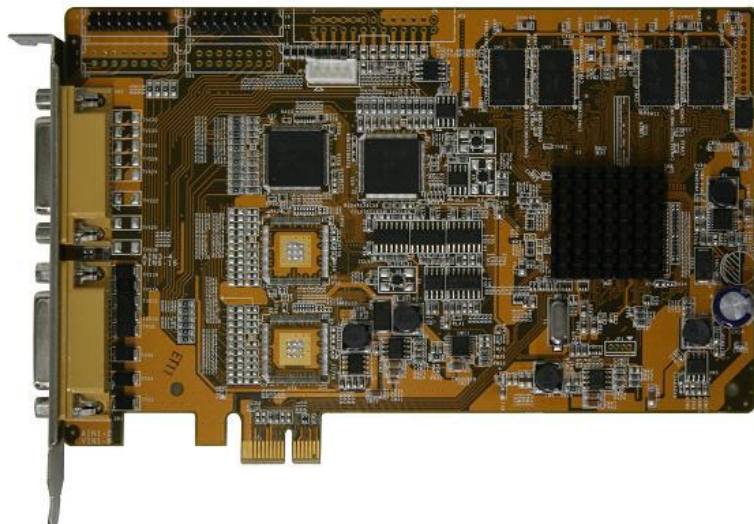

## Key Features

- H.264 real-time video compression
- 4CIF resolution real-time recording
- Dual-stream
- PCI-Ex1 2.0 standard
- OSD, LOGO and MASK overlay

## Specifications

	DS-4308HFVI-E	DS-4316HFVI-E
Dimensions (mm)	175 × 102	213 × 102
PCI Standard	PCI-Ex1 2.0	
Video Compression	H.264 (MPEG-4/part10)	
Video Input	8	16
Video Input Interface	BNC (1.0Vp-p, 75Ω)	
Video Standard	PAL/NTSC adaptive	
Live View Resolution	Up to 4CIF	
Playback Resolution	4CIF/2CIF/CIF /QCIF	
Frame Rate	1/16~25 fps (PAL), 1/16~30 fps (NTSC)	
Video Recording Bit Rate	32K ~ 2M (CIF), 70K ~ 4M (4CIF) (Unit: bps)	
Video Output Interface	1, BNC	
Audio Compression	OggVorbis	
Audio Input	8, mono	16, mono
Audio Input Interface	BNC (2Vp-p, 1kΩ, volume adjusting range: 83DB)	
Audio Output Interface	1, BNC	
Sampling Rate	16KHz	
Audio Recording Bit Rate	16Kbps	
Power Consumption	< 8.0 w	< 13.6 w