


## DS-6301/6304/6308DI Decoder Server



### Key Features

- High performance hardware decoding
- Compatible with standard H.264, MPEG4 and Hikvision DVR/DVS/Network Cameras
- Up to 720p resolution decoding
- VGA and composite output simultaneously
- Support variable bit rate and frame rate
- Support dynamic and cycle decoding
- Support DHCP and DDNS

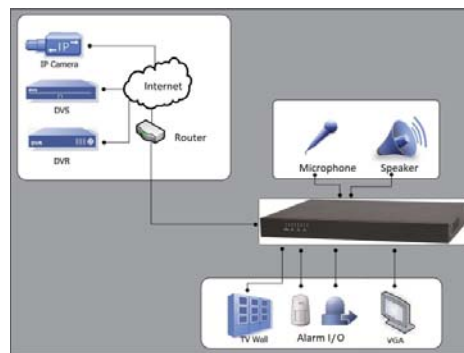

### Specifications

		DS-6301DI	DS-6304DI	DS-6308DI
Video/Audio input	Video compression	H.264, MPEG4	H.264, MPEG4	H.264, MPEG4
	Audio compression	OggVorbis, 16Kbps	OggVorbis, 16Kbps	OggVorbis, 16Kbps
	Voice talk input	1-ch, BNC(2.0Vp-p, 1kΩ)	1-ch, BNC(2.0Vp-p, 1kΩ)	1-ch, BNC(2.0Vp-p, 1kΩ)
Video/Audio output	Decode resolution	QCIF/CIF/2CIF/DCIF/4CIF/720P	QCIF/CIF/2CIF/DCIF/4CIF/720P	QCIF/CIF/2CIF/DCIF/4CIF/720P
	Video output	1-ch, BNC (1.0Vp-p, 75Ω)	4-ch, BNC (1.0Vp-p, 75Ω)	8-ch, BNC (1.0Vp-p, 75Ω)
	Frame rate	720P: 25fps(P)/30fps(N)	720P: 25fps(P)/30fps(N)	720P: 25fps(P)/30fps(N)
	Stream type	Video/Video&Audio	Video/Video&Audio	Video/Video&Audio
	Audio output	1-ch, BNC (Linear, 600Ω)	4-ch, BNC (Linear, 600Ω)	8-ch, BNC (Linear, 600Ω)
	Voice talk output	1-ch, BNC (Linear, 600Ω)	1-ch, BNC (Linear, 600Ω)	1-ch, BNC (Linear, 600Ω)
	External interface	Communication interface	1 RJ45 10M/100M/1000M adaptive Ethernet interface 1 RS232 port, 1 RS485 port	1 RJ45 10M/100M/1000M adaptive Ethernet interface 1 RS232 port, 1 RS485 port
VGA interface		1-ch, Resolution: 1280×1024×60Hz, 1280×720×60Hz, 1024×768×60Hz	2-ch, Resolution: 1280×1024×60Hz, 1280×720×60Hz, 1024×768×60Hz	4-ch, Resolution: 1280×1024×60Hz, 1280×720×60Hz, 1024×768×60Hz
Alarm input		8-ch	8-ch	8-ch
Alarm output		8-ch	8-ch	8-ch
General	Consumption	≤40W	≤40W	≤40W
	Working humidity	10%~90%	10%~90%	10%~90%
	Dimension (mm)	440mm(W)x44.5mm(H) x320mm(D)	440mm(W)x44.5mm(H) x320mm(D)	440mm(W)x44.5mm(H) x320mm(D)
	Weight	≤5Kg	≤5Kg	≤5Kg