


DS-7204AHLI-VS Standalone DVR



Key Features

- Each channel supports up to 4CIF encoding and CIF real-time encoding
- Dual stream
- VGA output
- 1 SATA interface
- On-screen display (OSD)

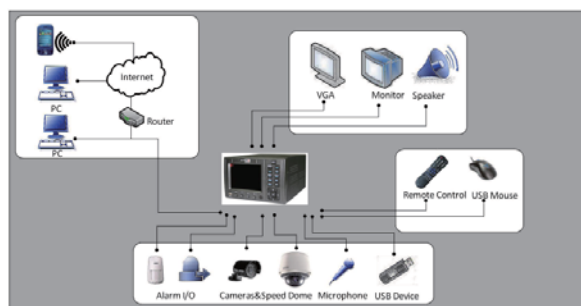

Specifications

		DS-7204AHLI-VS
Video/Audio input	Video compression	H.264
	Video input	4-ch
	Video input interface	BNC(1.0Vp-p, 75Ω)
	Audio compression	OggVorbis, 16Kbps
	Audio input	1-ch
Video/Audio output	Audio input interface	RCA (2.0~2.4Vp-p, 1KΩ)
	Voice talk input	1-ch, (Using Audio IN)
	Preview resolution	4CIF (PAL: 704x576, NTSC: 704x480)
	VGA output	1 VGA interface can support resolution: 1024x768/60Hz
	Recording resolution	4CIF/DCIF/2CIF/CIF/QCIF
	Video output	1 Channel BNC (1.0Vp-p, 75Ω)
	Video spot output	1 Channel BNC (1.0Vp-p, 75Ω)
	Frame rate	4CIF: 6fps, DCIF: 12fps, 2CIF: 12fps, CIF: 25(P)/30(N) fps
	Stream type	Video/Video&Audio
	Support dual stream	Yes
Hard disk driver	Video bit rate	32Kbps~2Mbps, or user-defined (Max. 8Mbps)
	Audio output	1 channel, RCA (2.0~2.4Vp-p, 600Ω)
	Interface type	1 SATA interface
External interface	Capacity	Each interface supports up to 2TB capacity
	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface, 1 RS-485 interface (T+, T-, R+, R-)
	USB interface	1 USB interface, can support USB disk, USB HDD, USB DVD-R/W and CD-R/W
	Alarm input	4-ch
	Alarm output	1-ch
General	Support Buzzer	Yes
	Power supply	12VDC
	Consumption	≤40W (without HDD)
	Working temperature	-10°C~+55°C
	Working humidity	10%~90%
	Size (mm)	270(D)x200(W)x130 mm(H)
Weight	≤5Kg (without HDD)	