


## DS-8104HMI-A

### Mobile DVR



#### Key Features

- Each channel supports up to 4CIF encoding
- Dual stream
- Anti-shock technology
- 2 2.5" pluggable SATA cages
- Built-in CDMA/WCDMA/CDMA 2000 wireless network modules
- Built-in GPS Module
- Built-in G-sensor

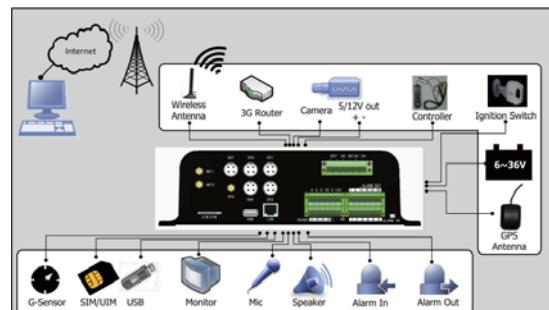

#### Specifications

		DS-8104HMI-A
Video/Audio input	Video compression	H.264
	Video input	4-ch
	Video input interface	aviation interface (PAL/NTSC adaptive; 1.0Vp-p, 75Ω)
	Audio compression	OggVorbis, 16Kbps
	Audio input	4-ch
Video/Audio output	Audio input interface	aviation interface (linear level, 1kΩ)
	Preview resolution	4CIF (PAL: 704x576, NTSC: 704x480)
	Recording resolution	4CIF/DCIF/2CIF/CIF/QCIF
	Video output	1-ch, aviation plug (PAL/NTSC adaptive; 1.0Vp-p, 75Ω)
	Frame rate	4CIF: 6fps, DCIF: 12fps, 2CIF: 15fps, CIF/QCIF: 25(P)/30(N)
Video/Audio output	Stream type	Video/Video&Audio
	Video bit rate	32K~2M adjustable, or user-defined, Max. 8Mbps
	Audio output	1-ch, aviation interface (linear level, 600Ω)
	Interface type	2 SATA interface
	Capacity	Each interface supports up to 2TB capacity
External interface	Technical patent	Hard disk vibration-proof and bracing technology
	Communication interface	1 RJ45 10M/100M adaptive Ethernet interface, 1 RS-485 interface
	Wireless network	Build-in module, double SMA antenna interface
	USB interface	1 USB interface, USB 2.0
	Alarm input	8-ch sensor input, support 2 types: N.O./N.C.
General	Alarm output	2-ch relay(or dry contact) output
	Remote control	IR remote controller
	GPS	Built-in GPS Module
	Power input	6~36VDC adaptive
	Power output	12VDC, 5V output, build in resettable fuse
General	Power off delay	Shut down delay after ignition off (5min~6h)
	Scheduled on/off	Daily scheduled power on/off (00:00~24:00)
	Consumption	≤6W(without hard disks)
	Working temperature	-15°C~+55°C
	Working humidity	10%~95%
	Dimension (mm)	210mm(D)×236mm (W)×73mm (H)
	Weight	≤3Kg (without HDD)