


# DS-8104/8108AHLI-ST ATM/POS DVR



## Key Features

- H.264 Video Compression
- CIF Resolution Real-time Recording
- Dual Stream
- 4 SATA HDD support
- HDD Group Management

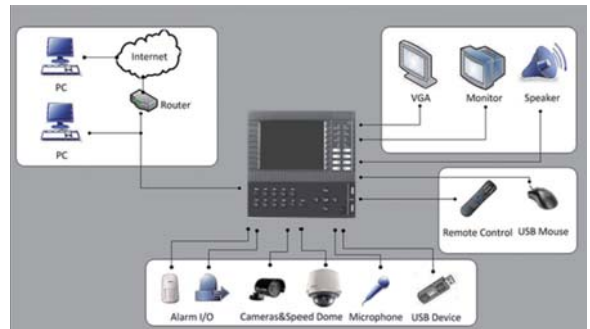

## Specifications

		DS-8104AHLI-ST	DS-8108AHLI-ST
Video/Audio input	Video compression	H.264	
	Analog video input	4-ch, BNC (1.0 Vp-p, 75 Ω), PAL / NTSC adaptive	8-ch, BNC (1.0 Vp-p, 75 Ω), PAL / NTSC adaptive
	Audio compression	OggVorbis	
	Audio input	4-ch, BNC (2.0 Vp-p, 1 kΩ)	8-ch, BNC (2.0 Vp-p, 1 kΩ)
	Voice talk input	1-ch, BNC (2.0 Vp-p, 1 kΩ)	
Video/Audio output	Preview resolution	PAL: 704 × 576, NTSC: 704 × 480	
	CVBS output	1, BNC (1.0 Vp-p, 75 Ω), Resolution: PAL: 704 × 576, NTSC: 704 × 480	
	VGA output	1, Resolution: 1024 × 768 @ 60 Hz	
	LCD Display	Yes	
	Encoding resolution	Channel 1: 4CIF / 2CIF / CIF / QCIF Channel 2-4: CIF / QCIF	Channel 1: 4CIF / 2CIF / CIF / QCIF Channel 2-8: CIF / QCIF
	Frame rate	25 fps (P) / 30 fps (N)	
	Video bit rate	32 Kbps - 2048 Kbps, or user defined (Max. 3072 Kbps)	
	Audio output	1-ch, BNC (Linear Electrical Level, 600 Ω)	
	Audio Bit rate	64 Kbps	
	Dual Stream	Support	
Hard disk	Stream Type	Video / Video & Audio	
	Synchronous Playback	4-ch	
	SATA Interface	4 SATA interface	
	ESATA Interface	1 ESATA interface (Reserved)	
External interface	Capacity	Up to 2 TB capacity for each interface	
	Network interface	1, RJ45 10 M / 100 M adaptive Ethernet	
	Serial interface	1 RS-232 interface 1 RS-485 interface	
	USB interface	2, USB 2.0	
	Alarm in	9-ch	
Others	Alarm out	4-ch	
	Power supply	100 - 240 V AC, 6.3 A, 50 - 60 Hz	
	Consumption	≤ 40 W (without hard disk or DVD-R/W)	≤ 45 W (without hard disk or DVD-R/W)
	Working temperature	-10 °C - +55 °C (14 °F - 131 °F)	
	Working humidity	10% - 90%	
	Dimension	180 (H) × 180 (W) × 280 mm (D) (7.09" (H) × 7.09" (W) × 11.02" (D))	
Weight (without hard disk)	≤ 5000 g (11.02 lbs)		