


DS-9508/9516NI-S Embedded NVR



Key Features

- Support local storage at H.264 or MPEG4 compression
- Support video & audio from network camera, network speed dome and video server
- H.264/MPEG4 compression video stream
- Up to 5 Megapixel(2560x1920) recording resolution
- Redundant HDD group management

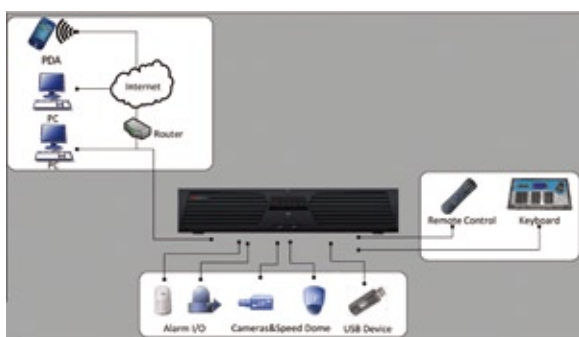

Specifications

		DS-9508NI-S	DS-9516NI-S	
Video/Audio input	IP video input	8-ch 4CIF/4-ch 720P/2-ch UXGA Real Time, or 4-ch UXGA/4-ch 5 Megapixel not Real Time	16-ch 4CIF/8-ch 720P/4-ch UXGA Real Time, or 8-ch UXGA/8-ch 5 Megapixel not Real Time	
	SATA Interface	4	8	
Hard disk	Type	SATA interface		
	Capacity	more than 2TB		
External interface	Network interface	1RJ-45, 10/100/1000Mbps self-adaptive Ethernet interface		
	USB interface	2, USB2.0		
	Serial interface		1 RS485 serial interface	
			1 RS232 serial interface	
			1 keyboard 485 serial interface	
		Alarm in	16	
	Alarm out	4		
Others	Chassis	19" standard 1.5U chassis	19" standard 2U chassis	
	Power supply	100~240VAC, 6.3A, 50~60Hz		
	Consumption	≤20W (without HDD)		
	Working temperature	-10°C~+55°C (14°F~131°F)		
	Working humidity	10%~90%		
	Dimension	442(W)×371(D)×70mm(H) (17.40"(W)×14.60"(D)×2.76"(H))	442(W)×457(D)×88mm(H) (17.40"(W)×17.99"(D)×3.46"(H))	
Weight(without HDD)	≤8000g(17.64lbs)			