

DS-D5040FC 40" Monitor

Key Features


- Support 8bit/10bit 2-ch LVDS(1920 x 1080) HD display
- Adopt 3-D digital comb filter
- Support audio output
- True color OSD and user-friendly operation menu
- 1 channel HDMI 1.4 input interface, support HDCP
- Adopt 3D noise reduction technology
- Support high definition JPEG decoding
- Programmable 12-bit RGB gamma correction technology
- Support software spread-spectrum technology to reduce EMI radiation
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge
- High reliable components for 7 x 24 working



Model

DS-D5040FC

Interfaces

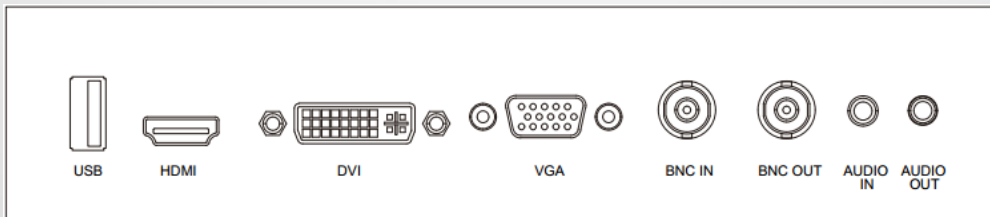

DS-D5040FC 40" Monitor



Specification

Model	DS-D5040FC	
Display Type	TFT-LED Backlight	
Screen Size	39.5"	
Dot Pitch (H×V)	0.15245 mm x 0.4494 mm	
Max Resolution	1920 x 1080	
Brightness	360 cd/m ²	
Contrast	5000 : 1	
Response Time	9.5 ms	
Color	16.7 M	
Viewable Area (H×V)	878.112 mm x 485.352 mm	
Viewing Angle	Horizontal 178°, Vertical 178°	
Interfaces	DVI Input	1
	VGA Input	1
	HDMI Input	1
	USB	1
	BNC Input	1
	BNC Output	1
	PC AUDIO-IN	1, 3.5 mm mini-jack
	PC AUDIO-OUT	1, 3.5 mm mini-jack
Speaker	2W x 2, 6Ω	
Power Supply	100 ~ 240 V AC, 50/60 Hz	
Power Consumption	≤ 60W	
Operation Temperature	0°C ~ 40°C	
Operation Humidity	10%~85%	
Storage Temperature	-20°C ~ 55°C	
Storage Humidity	5%~95%	
Dimension (W×H×D)	908.4 mm x 516.9 mm x 47.8 mm	
Package Dimension (W×H×D)	988 mm x 598 mm x 193 mm	
Weight	11 Kg(Gross weight) , 8.5 Kg(Net weight)	
Included Accessories	power cord x 1, VGA cable x 1, HDMI x 1, Remote control x 1, battery x 2, user manual x 1, warranty card x 1	

DS-D5040FC 40" Monitor



Dimension (mm)

