



## ▪ Specification





System	
Operating system	Linux
Display	
Screen size	2.4 inch
Type	Display screen
Resolution	320 × 240
Video	
Lens	1
Resolution	2 MP (video stream: 720P)
FOV	HFOV = 25°; VFOV = 43°
Video standard	PAL (Default) and NTSC
Audio	
Audio output	Built-in buzzer
Network	
Wired network	10 M/100 M self-adaptive
Interface	
Network interface	1
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
RS-485	Support
USB	1
Capacity	
Face capacity	500
Fingerprint capacity	3000
Card capacity	3000
Event capacity	150,000
Authentication	
Face recognition distance	0.3 m to 1.5 m
Face recognition accuracy rate	> 99%
Face recognition duration	< 0.2 s
Card type	M1 card
Card reading distance	0 to 5 cm
Function	
Face anti-spoofing	Support
Face recognition	Support
General	
Supplement light	White light
Power supply	12 VDC
Power consumption	≤ 6 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)

Working humidity	0% to 90% (No condensing)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese
Keypad	Support

▪ **Available Model**

DS-K1T321MFX

▪ **Dimension**

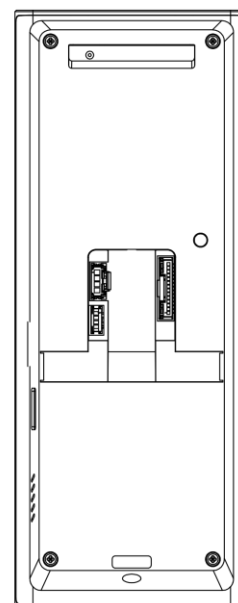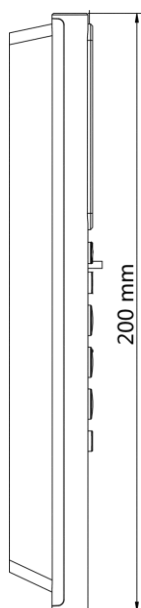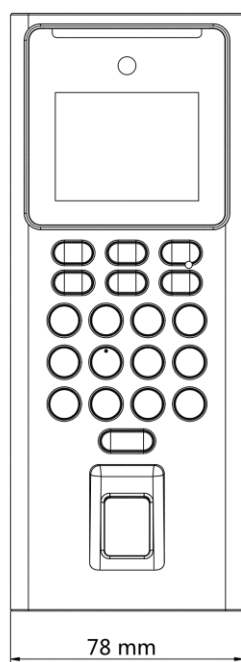

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

