

## VCU-A014-ITIR

### 7MP 1" Progressive Scan CCD Camera



- 1" Progressive Scan CCD
- Auto-iris
- 3392x2008 @ 25fps
- H.264/MJPEG
- Support white light or IR light

- Support speed measurement (with external speed measuring radar)
- Wrong-way Detection
- Support most of the countries and regions of Mid-East, Africa, Asia-Pacific, America and Europe, Australia




## Specifications

<b>Camera</b>	
Image Sensor	1" Progressive Scan CCD
Shutter Speed	1 s - 1/100,000 s
Day & Night	IR Cut Filter
Digital Noise Reduction	3D DNR
<b>Compression Standard</b>	
Video Compression	H.264/MJPEG
Picture Format	JPEG
H.264 Type	Baseline Profile/Main Profile/High Profile
Video Bit Rate	32 Kbps – 16 Mbps
<b>Smart Feature-set</b>	
Function	Support license plate recognition, Speed Measurement, Wrong-way Detection
Light Supplement Control	Supplement light synchronous with White or IR LED strobe-flash light
<b>Image</b>	
Max. Resolution	3392×2008
Main Stream	50Hz: 25fps (3392×2008, 1920× 1080, 1280 × 720)
Sub Stream	50Hz: 25fps (352 × 288)
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness adjustable by client software or web browser
SVC	Support
<b>Network</b>	
Network Storage	Support Micro SD/SDHC/SDXC card (128G), local storage, ANR
Protocols	TCP/IP, HTTP, HTTPS, FTP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, IPv6, UDP,
API	ONVIF (Version 2.1), PSIA, ISAPI
<b>Interface</b>	
Communication Interface	1 RJ45 10M/100M/1000M Ethernet port, 5 RS-485 interface, 1 RS-232 interface
Video Output	1Vp-p composite output (75 Ω/BNC)
Trigger Input	7 external input,
Trigger Output	7 ( photoelectric coupling isolation 2500VAC), 2 relay output
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
<b>General</b>	
Operating Conditions	-20 °C – 60 °C(-4°F to +140°F) , 5%~95%@40°C (104°F) , non-condensing
Power Supply	100VAC~240VAC; Frequency: 48Hz~52Hz
Power Consumption and Current	<30W
Protection Level	IP54
Dimensions	180mm(W)×152.7mm(H)×636mm(D)(7.09×6.01×25.04 inch)
Weight	6.5±0.5kg(14.3lb±1.1lb)

### Available Models:

VCU-A014-ITIR

### Dimensions

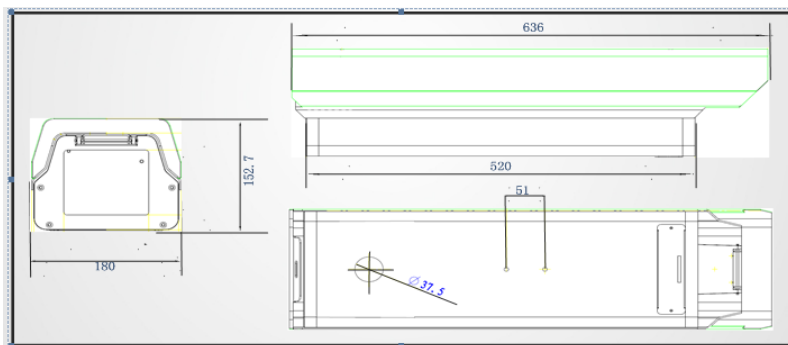

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

050401160509