

## HRDV16/8

### DIGITAL VIDEO RECORDER WITH 16 OR 8 VIDEO CHANNELS

The HRDV is a complete integrated digital video management system combining a digital recorder, multiplexer, text inserter, video motion detector and remote video transmission system. With features like simultaneous time-lapse and event recording, jog shuttle, and front panel controls, the HRDV is as easy to operate as a VCR, yet provides secure, high resolution video and audio. Video is stored on up to 1.6 Terabyte internal hard drives for safe-keeping. CD-RW and removable hard drive options allow for easy evidence video retrieval and preservation. Standard operation allows for reviewing live or recorded video without stopping recording.

Respond quickly to critical events with the instant video playback feature and the simultaneous multi-screen viewing and spot monitor video output. Camera homing upon alarm condition automatically switches the monitor output to the right camera where the alarm was triggered. Automated system reports make locating desired motion, text, and event fast and easy. Flexible access options allow for local access through the front panel controls or remotely using Remote Access Software (RAS). Three simultaneous RAS users can access the HRDV to remotely view live or recorded video, control Pan, Tilt, Zoom (PTZ) Domes, change system configuration, or update HRDV firmware without a site visit. RAS supports live audio and audio playback after event download and either a dial-up or network connection. RAS installs on Windows® based PCs in just minutes. An automatic site polling mechanism verifies site operational status.

#### Market Opportunities

HRDV mission critical operation is ideal for, but not limited to, installations in the financial and retail service industries such as banks, and retail stores. Additional applications include gas stations, convenience stores, and virtually any situation where mission critical video recording is a must. Point of Sale and ATM Text insertion are also key markets. The HRDV provides easy evidence locating, reviewing and evidence CD burning from the front panel as well as remotely via the network for evidence archiving. The HRDV is a technologically advanced, easy to install, and cost-effective digital video solution.

#### Features

- 8 and 16 Channel models supports up to 1.6 TB
- HRDV16; Record speed of up to 60 ips (NTSC) 50 ips (PAL) - HRDV8; Record speed of up to 60 ips (NTSC) 50 ips (PAL)
- Remote Management via LAN/WAN, DSL or PSTN using Remote Access Software (RAS)
- Event reporting and multi-zone motion detection
- Point of Sale /ATM text monitoring
- Email Alert, automatic alarm notification over TCP/IP networks
- QNX real time OS for reliable 24/7 operation
- Verify original picture integrity with image authentication process



HRDV16



HRDV8

# HRDV16/8

www.honeywellvideo.com

## SPECIFICATIONS

Video	
Input	16 or 8 channel NTSC/PAL 1.0 Vp-p, 75 Ohms, BNC
Output	16 or 8 looping inputs NTSC/PAL 1.0 Vp-p, 75 Ohms, BNC
Monitor Outputs	
Main Composite Output	1 Output BNC 1 Vp-p, 75 Ohms, multi-screen capable
Spot Composite Output	1 Output BNC, 1 Vp-p, 75 Ohms, switched video
Main S-Video Output	1 Output Y/C, 1 Vp-p, 75 Ohms, multi-screen capable
Audio	
Input	1 Line input RCA
Output	1 Line output RCA
Alarm	
Input	16 Inputs NO/NC contact HRDV16 8 Inputs NO/NC contact HRDV8
Output	4 Outputs contact closure
Operating System	Real time operating system, QNX, stored in Flash memory
Display	
Video Signal Resolution	NTSC 720 x 486 PAL 720 x 576
Recording	
Compression Algorithm	Wavelet
Video Signal Resolution	NTSC 720 x 486 PAL 720 x 576
Recording ips Global	60 ips NTSC, 50 ips PAL HRDV16 30 ips NTSC, 25 ips PAL HRDV8
Recording ips Individual Camera	NTSC 0.5 ips to 30 ips PAL 0.5 ips to 25 ips
Still Image Capture	NTSC 720 x 486 JPEG or BMP PAL 720 x 576 JPEG or BMP
Recording Triggered By	
Motion Detection	Full or partial area setup up, direction, sensitivity, area size
Alarm Input	NO/NC
Text Data Input	Any text string or configurable specific text strings
Continuous	Always recording
Multitask	
RAS/Local Viewer	Simultaneous recording, while playback or viewing live Scalable Viewer to allow viewing while performing additional tasks (e-mail)
Language Support	
Local Unit	English, French, Spanish, Dutch, Italian, Portuguese
Remote Access Software	English, French, Spanish, Dutch, Portuguese


Control Unit	
Local	Front panel control
Network	Using Remote Access Software (RAS)
Network Connectivity	
LAN	Optional – 10/100 Base T Ethernet, LAN, PCMCIA card
Modem	Optional – V.90/92 Modem PCMCIA card
Functions	Configuration, live view, search, PTZ, image save, audio, POS text
Operating System	
Compatibility	Microsoft® Windows® 98 second ed. Windows NT - Service Pack 6 / higher Windows 2000 - Service Pack 2 / higher Windows XP Professional
HDD Storage	
Internal Hard Drives	Up to 4 IDE, up to 1.6 TB total storage
Video Backup Media	CDR/W – 1 IDE or SCSI Removable Hard Drive – 1 IDE or SCSI
Video Format	Wavelet
Still Image	BMP or JPEG
Image Authentication	Proprietary Encrypted Authenticode
Electrical	
Input Power	115 VAC 50/60 Hz, 230 VAC 50/60 Hz
Power Consumption	Nominal 90 W, (800 mA @ 115 VAC)
Connectors	
Composite Video In	BNC 16 for HRDV16, 8 for HRDV8
Composite Video Out	BNC 16 looping for HRDV16, 8 looping for HRDV8
Monitor Composite Video Out	1 BNC Main, 1 S-Video Main, 1 BNC Spot
Audio In	1 Line input RCA
Audio Out	1 Line output RCA
D25 Male (COMM)	1 RS-232-C port, 4 RS-232-C text insertion ports, 1 RS-485 port
D25 Female (ALARM)	16 Alarm inputs, NO/NC for HRDV16 8 Alarm inputs, NO/NC for HRDV8 4 Alarm outputs contact closure
SCSI 2	Standard 68-pin, type 2 connector
PCMCIA	Used for Ethernet LAN card or V.90/92 Modem card
Environmental	
Dimensions (W x H x D)	17" x 4.6" x 17.375" (431.8 mm x 116.8 mm x 441.3 mm)
Weight	17 lb (7.71 kg)
Operating Temp	40°F to 100°F (4°C to 37°C)
Regulatory	
Approvals	FCC, CE, UL

## HRDV16/8


www.honeywellvideo.com

### SYSTEM DIMENSIONS AND DIAGRAM 16 CHANNEL DIGITAL VIDEO RECORDER


Front View

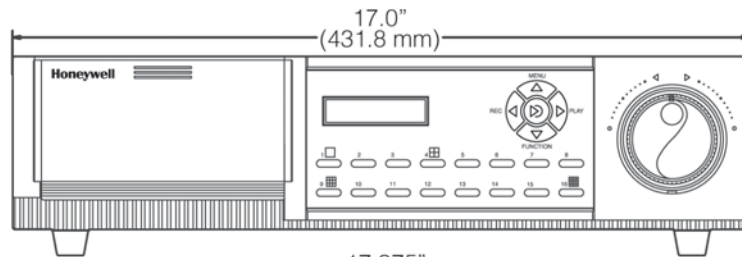

Side View

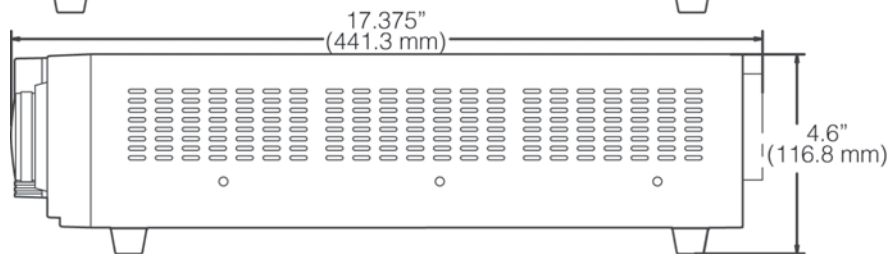

Back View

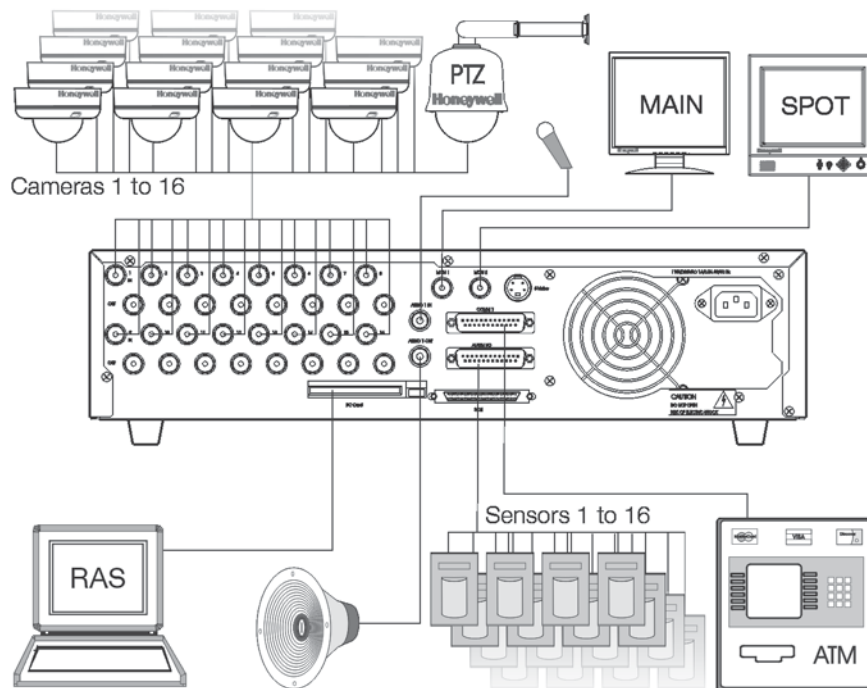

# HRDV16/8

www.honeywellvideo.com

Accessories	
HRDVMOD	PCMCIA Modem Card for Phone Line Connection (inserts into DVMS, behind unit)
HRDVNET	PCMCIA Network Card for TCP/IP Ethernet Connection (inserts into DVMS, behind unit)
HRDVCBLCA	Kit containing COMM port and Alarm breakout cables to improve ease and speed of installation for HRDV16/8 units
HRDVDUK	Drive Upgrade Kit: Upgrade HRDV hard drives in the field for HRDV16/8 with this kit. Includes mounting hardware and cables. HARD DRIVE ORDERED SEPARATELY.
HRDVBT	IDE Drive Bay and Tray (empty without Hard Drive); use this to add the Removable Drive option to a HRDV unit
HRDVH80	Spare 80 GB IDE Hard Drive, HRDV
HRDVH160	Spare 160 GB IDE Hard Drive, HRDV
HRDVH200	Spare 200 GB IDE Hard Drive, HRDV
HRDVH250	Spare 250 GB IDE Hard Drive, HRDV
HRDVH400	Spare 400 GB IDE Hard Drive, HRDV
HRDVCDRW	Internal IDE CD-RW: Compatible with HRDV only
HRDVEVCD	Evidence CD: Compact Disk with instructions on how to burn clip(s) for evidence purposes

Ordering	
<b>HRDV 16 C 80 X</b>	
<b>Video Standard</b>	X PAL NTSC
<b>Storage Options</b>	80 80 GB HDD 120 120 GB HDD 250 250 GB HDD 500 500 GB HDD 800 800 GB HDD 1200 1200 GB HDD 1600 1600 GB HDD - <i>Available only in Fixed</i>
<b>Hard Drive Type</b>	C CDRW F Fixed R Removable
<b>Channels</b>	8 8 Channels 16 16 Channels
<b>Model</b>	HRDV Duplex Digital Recorder

**NOTE:** Honeywell reserves the right, without notification, to make changes in product design or specifications.

**Honeywell Security**  
 Honeywell Video Systems  
 2700 Blankenbaker Pkwy, Suite 150  
 Louisville, KY 40299  
 1.800.796.CCTV  
 www.honeywell.com

HV05255  
 L/HRDV/D  
 February 2006  
 ©2006 Honeywell International, Inc.