


Honeywell | Performance Series HQA DVRs

Performance Series HQA Digital Video Recorder Overview

Take Advantage of Existing Coax Infrastructure with High Quality Analog 1080p Hybrid DVRs

Supercharge your analog security system with Honeywell's HQA (High Quality Analog) technology for High Definition 1080p images over your existing coax infrastructure. Our newest HQA DVRs use an over-coaxial cable analog HD video transmission standard to allow long-distance HD transmission at a lower cost. The Performance Series HQA DVRs are the economic alternative for achieving HD video surveillance while retaining your existing BNC cables and cameras.



- High decoding capability for full HD viewing and recording.
- View up to 16 channels simultaneously on your monitor with 960×540 preview.
- Convert analog channels to IP channels as you expand your network.
- Record all channels @ 720p full frame rate.
- H.264 dual-stream video compression.
- Each channel supports HQA/analog video input; up to 8 additional channels support IP video input.
- Simultaneous HDMI/VGA video output.

Easy to Use

- The Quick wizard and plug-and-play (like traditional DVRs and analog cameras) make setup fast and easy.
- Physical installation within minutes with the help of a comprehensive and easy-to-understand guick installation guide.

Convenient, Flexible Storage Options

- Internal storage options from 0 to 4 TB depending on the model.
- Storage is expandable up to 6 TB for 1 SATA units and 12 TB for 2 SATA units.
- Store videos and snapshots to external storage such as the client's PC, through the Internet.
- · Store videos and snapshots to an external network storage server such as an FTP site.
- Store videos and snapshots to a USB storage device.



Dynamic, Accessible Monitoring

- Monitor from anywhere using the mobile apps for iOS and Android devices.
- All channels support synchronous playback and smart search (search for video that was recorded because motion was detected in a selected area).

Safety Features

- Configurable motion detection and camera tamper detection settings, including configurable event notifications, such as automatic emails (with attached video or snapshot) and automatic alerts (such as buzzers).
- · Remote configuration and firmware updating through Honeywell Viewer web client and the Honeywell Config tool. Password-protected access to the camera's and DVR's video and network setup.
- Bidirectional communication for the DVR.

Market Opportunities

- The Performance Series HQA Hybrid 1080p DVRs' HQA technology makes these DVRs perfect for installations where you want HD-quality video while still using your existing coax infrastructure.
- These HQA DVRs also deliver higher quality video than current 960H analog systems, but at a similar cost.


Performance Series HQA DVRs

Immediately Detect and Respond to Events

The Performance Series HQA 1080p Hybrid DVRs can be configured to automatically detect and respond to events such as motion in the scene, alarm inputs, video loss, and/or tampering.

Automated Responses Include:

- Sending a notification through email, FTP and/or HTTP.
- Uploading still images at the time of the event through email and/or FTP.
- Recording a video clip of the event to a configured the client's or network-attached storage.

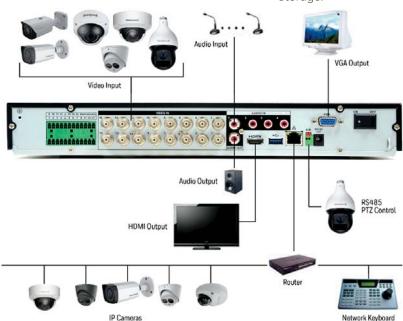

ORDERING

HRHQ1040 4-Channel, 1 SATA, 720p @ 120 fps, 1080p @ 60 fps, alarm 4/3 input/output, 0 TB, 12 VDC HRHQ1041 4-Channel, 1 SATA, 720p @ 120 fps, 1080p @ 60 fps, alarm 4/3 input/output, 1 TB, 12 VDC HRHQ1080 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 0 TB, 12 VDC HRHQ1081 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 1 TB, 12 VDC HRHQ1082 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 2 TB, 12 VDC HRHQ1160 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 0 TB, 12 VDC HRHQ1162 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 2 TB, 12 VDC HRHQ1164 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 4 TB, 12 VDC		
HRHQ1080 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 0 TB, 12 VDC HRHQ1081 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 1 TB, 12 VDC HRHQ1082 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 2 TB, 12 VDC HRHQ1160 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 0 TB, 12 VDC HRHQ1162 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 2 TB, 12 VDC	HRHQ1040	4-Channel, 1 SATA, 720p @ 120 fps, 1080p @ 60 fps, alarm 4/3 input/output, 0 TB, 12 VDC
HRHQ1081 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 1 TB, 12 VDC HRHQ1082 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 2 TB, 12 VDC HRHQ1160 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 0 TB, 12 VDC HRHQ1162 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 2 TB, 12 VDC	HRHQ1041	4-Channel, 1 SATA, 720p @ 120 fps, 1080p @ 60 fps, alarm 4/3 input/output, 1 TB, 12 VDC
HRHQ1082 8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 2 TB, 12 VDC HRHQ1160 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 0 TB, 12 VDC HRHQ1162 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 2 TB, 12 VDC	HRHQ1080	8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 0 TB, 12 VDC
HRHQ1160 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 0 TB, 12 VDC HRHQ1162 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 2 TB, 12 VDC	HRHQ1081	8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 1 TB, 12 VDC
HRHQ1162 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 2 TB, 12 VDC	HRHQ1082	8-Channel, 2 SATA, 720p @ 240 fps, 1080p @ 120 fps, alarm 8/3 input/output, 2 TB, 12 VDC
	HRHQ1160	16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 0 TB, 12 VDC
HRHQ1164 16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 4 TB, 12 VDC	HRHQ1162	16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 2 TB, 12 VDC
	HRHQ1164	16-Channel, 2 SATA, 720p @ 480 fps, 1080p @ 240 fps, alarm 16/3 input/output, 4 TB, 12 VDC

For more information

www.honeywell.com/security

Honeywell Security and Fire

2700 Blankenbaker Pkwy, Suite 150 Louisville, KY 40299 1.800.323.4576 www.honeywell.com Honeywell reserves the right, without notification, to make changes in product design or specifications.

