

Multiplexer

REAL TIME MULTIPLEXER HCM-04BT / HCM-09CP / HCM-16CP



HCM-16CP



HCM-04BT


FEATURES

- Triplex
- Real-time Live Display
- OSD program setup
- Compatible with Colour or Monochrome cameras
- Multi-Screen display
- External impedance switchable
- Trigger recording
- Adjustable recording
- Digital video motion detection for HCM-09CP/HCM-16CP
- Dynamic priority division

	HCM-04BT	HCM-09CP	HCM-16CP
Resolution	NTSC: 720 X 480 PAL: 720 X 576		
Video Input	4 channel cameras VCR playback input	9 channel cameras VCR playback input	16 channel cameras VCR playback input
Video Output	1 Monitor 4 channel cameras Looping VCR playback output	1 Monitor 1S Video Y/C output 1 SPOT Monitor 9 channel cameras Looping VCR playback output 1 S Video Y/C output	1 Monitor 1S Video Y/C output 1 SPOT Monitor 16 channel cameras Looping VCR playback output 1 S Video Y/C output
Motion Detection	16H X 12V (192 grid) for each channel		
Alarm Input	x 4 NO or NC Programmable	x 9 NO or NC Programmable	x 16 NO or NC Programmable
Relay Output	NO or NC Programmable Contact x 1	NO or NC Programmable Contact x 1	NO or NC Programmable Contact x 1
Alarm Duration	1-99 seconds Programmable		
Power Consumption	12VDC / 8W	12VDC / 12W	12VDC / 15W
Dimensions (W*H*D) mm	323*44*244	432*44*265	
Operating Temperature	-10°C ~ +50 °C		

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

HCM-16CP

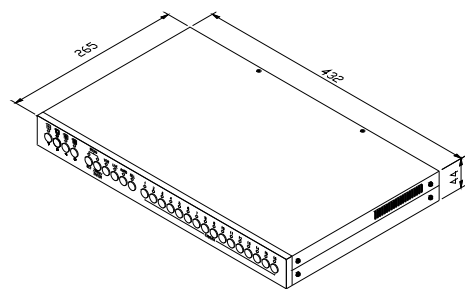

**Special Price for Over 10Pcs (Inclusive),
Please Contact:020 8965 0111 or E-mail:sales@huntelelect.co.uk**

MODEL	DESCRIPTION
HCM-04BT	4ch colour real time multiplexer, Triplex
HCM-09CP	9ch colour real time multiplexer, Triplex
HCM-16CP	16ch colour real time multiplexer, Triplex

Accessories

VIDEO SWITCHERS



FEATURES

- Easy to install
- Long life LED
- Looping output

ITEMS	HTS-1005-4	HTS-1005-8
Inputs	4	8
Output	2	2
Video Inputs	1 Vp-p, 75 Ohms (Maxi 2 Vp-p)	
Video Output	1 Vp-p, 75 Ohms (involve internal adjustable gain)	
Video Gain	From attenuation to amplifier 0.8 Vp-p to 1.4 Vp-p	
Video Bandwidth	20 MHz ± 3 dB	
Crosstalk Interval	Better than 40 dB	
Switching Interval	Approx. 1 to 35 sec.	
Channel Switches	By-Pass/Auto/Home	
Power Supply	AC110V 60Hz or AC 230V 50Hz	
Power Consumption	5W (Fully Channels)	
Video Connectors	For BNC available	
Position and Power Lamp	Long Life Led	
Construction	Steel, Ivory or Black baked emanation	
Dimensions W*H*D mm	220*46*200	
Weight kg	1.7	
Storage Temperature	-30°C ~ +60°C	
Operating Temperature	-10°C ~ +45°C	

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

**Special Price for Over 10Pcs (Inclusive),
Please Contact:020 8965 0111 or E-mail:sales@huntelelect.co.uk**

MODEL	DESCRIPTION
HTS-1005-4	4-CH switcher
HTS-1005-8	8-CH switcher

