

12MP Vandal Resistant IR Fisheye Camera

DC-Y3C14WRX




- Easy installation with DirectIP NVR
- 12MP Sensor / 9.4MP (3200 x 2944) resolution
- Fixed-focal lens (f=1.98mm)
- micro SD/SDHC/SDXC, Smart Failover (Up to 128GB)
- Two-way audio
- Alarm in / out
- IK10 / IP67 supports
- PoE (IEEE 802.3af Class 3), 12VDC
- Day and night (ICR)
- True wide dynamic range (WDR)
- IR LED (Distance : 15m)
- Various viewing composition, 6 dewarping view modes
- Supports ONVIF



SPECIFICATIONS

VIDEO																																													
Image Sensor	1/1.7" 12MP CMOS																																												
Max. Resolution	3200 x 2944																																												
Scanning Mode	Progressive Scan																																												
Lens Type	Fixed-focal																																												
Focal Length	f = 1.98mm																																												
Aperture	F2.8																																												
Iris Control	Fixed Iris																																												
Angular Field of View	180° (H), 168° (V), 180° (D)																																												
Pan / Tilt Range	-																																												
Min. Illumination	Color : 0.2 Lux @ F2.8 B/W : 0 Lux (IR LED On)																																												
Dynamic Range	120dB (True WDR)																																												
Electronic Shutter Speed	Auto / Manual (1/30 ~ 1/10000), Anti-flicker, Slow Shutter (1~1/5, 1/7.5, 1/15)																																												
Day and Night	IR Cut Filter with Auto Switch																																												
IR Distance (LEDs)	15m / 49.2ft (6ea)																																												
Image Setting	Configurable Exposure, White Balance, Sharpness																																												
Digital Noise Reduction	Configurable 2DNR/3DNR																																												
Backlight Compensation	On / Off / HSBC																																												
Image Stabilizer	-																																												
Privacy Masking	8 Zones																																												
Intelligent Video	Video Motion Detection, Active Tampering Alarm, Trip Zone																																												
Viewing Composition	10, 1P, 1P2R, 2P, 4R, 107R																																												
Video Out	-																																												
NETWORK																																													
	<table border="1"> <thead> <tr> <th>DirectIP Mode</th> <th>Compatibility Mode</th> </tr> </thead> <tbody> <tr> <td>Video Compression</td> <td>H.265, H.264 (MPEG-4 Part 10/AVC), M-JPEG</td> </tr> <tr> <td>Intelligent Codec</td> <td>Supported</td> </tr> <tr> <td>Bitrate Control</td> <td>H.264 - CBR / VBR, H.265 - CBR / VBR</td> </tr> <tr> <td>Audio Compression</td> <td>ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law</td> </tr> <tr> <td>Two-way Audio</td> <td>Yes</td> </tr> <tr> <td>IP Camera Protocol</td> <td>DirectIP</td> </tr> <tr> <td></td> <td>IDIS ONVIF Profile S</td> </tr> <tr> <td>Max. Frame Rate</td> <td>15ips : 3200 x 2944 (WDR)</td> </tr> <tr> <td></td> <td>30ips : 3200 x 2944 15ips : 3200 x 2944 (WDR)</td> </tr> <tr> <td>Supported Resolution</td> <td>3200 x 2944, 800 x 752</td> </tr> <tr> <td>Multi-video Streaming</td> <td>Quadruple Streaming</td> </tr> <tr> <td></td> <td>Hextuple Streaming</td> </tr> <tr> <td>Network Protocols</td> <td>DirectIP Protocol</td> </tr> <tr> <td></td> <td>RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNMP, SMTP, FEN, mDNS, uPNP</td> </tr> <tr> <td>Security</td> <td>SSL Encryption</td> </tr> <tr> <td></td> <td>Multi-user Authority, IEEE 802.1x IP Filtering, HTTPS, SSL Encryption</td> </tr> <tr> <td>Remote Access Client</td> <td>DirectIP NVR Connection</td> </tr> <tr> <td></td> <td>IDIS Web, IDIS Mobile, IDIS Solution Suite</td> </tr> <tr> <td>Ethernet</td> <td>RJ45 (10/100/1000BASE-T)</td> </tr> <tr> <td>Recording Session Buffer (NLSRec)</td> <td>Yes (Up to 60MB)</td> </tr> <tr> <td>Edge Storage</td> <td>micro SD/SDHC/SDXC, Smart Failover (Up to 128GB)</td> </tr> </tbody> </table>	DirectIP Mode	Compatibility Mode	Video Compression	H.265, H.264 (MPEG-4 Part 10/AVC), M-JPEG	Intelligent Codec	Supported	Bitrate Control	H.264 - CBR / VBR, H.265 - CBR / VBR	Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law	Two-way Audio	Yes	IP Camera Protocol	DirectIP		IDIS ONVIF Profile S	Max. Frame Rate	15ips : 3200 x 2944 (WDR)		30ips : 3200 x 2944 15ips : 3200 x 2944 (WDR)	Supported Resolution	3200 x 2944, 800 x 752	Multi-video Streaming	Quadruple Streaming		Hextuple Streaming	Network Protocols	DirectIP Protocol		RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNMP, SMTP, FEN, mDNS, uPNP	Security	SSL Encryption		Multi-user Authority, IEEE 802.1x IP Filtering, HTTPS, SSL Encryption	Remote Access Client	DirectIP NVR Connection		IDIS Web, IDIS Mobile, IDIS Solution Suite	Ethernet	RJ45 (10/100/1000BASE-T)	Recording Session Buffer (NLSRec)	Yes (Up to 60MB)	Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 128GB)
DirectIP Mode	Compatibility Mode																																												
Video Compression	H.265, H.264 (MPEG-4 Part 10/AVC), M-JPEG																																												
Intelligent Codec	Supported																																												
Bitrate Control	H.264 - CBR / VBR, H.265 - CBR / VBR																																												
Audio Compression	ADPCM 16K, G.726, G.711 u-Law, G.711 a-Law																																												
Two-way Audio	Yes																																												
IP Camera Protocol	DirectIP																																												
	IDIS ONVIF Profile S																																												
Max. Frame Rate	15ips : 3200 x 2944 (WDR)																																												
	30ips : 3200 x 2944 15ips : 3200 x 2944 (WDR)																																												
Supported Resolution	3200 x 2944, 800 x 752																																												
Multi-video Streaming	Quadruple Streaming																																												
	Hextuple Streaming																																												
Network Protocols	DirectIP Protocol																																												
	RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/UDP RTSP/TCP, HTTP, HTTPS, FTP, SNMP, SMTP, FEN, mDNS, uPNP																																												
Security	SSL Encryption																																												
	Multi-user Authority, IEEE 802.1x IP Filtering, HTTPS, SSL Encryption																																												
Remote Access Client	DirectIP NVR Connection																																												
	IDIS Web, IDIS Mobile, IDIS Solution Suite																																												
Ethernet	RJ45 (10/100/1000BASE-T)																																												
Recording Session Buffer (NLSRec)	Yes (Up to 60MB)																																												
Edge Storage	micro SD/SDHC/SDXC, Smart Failover (Up to 128GB)																																												
ALARM AND EVENT																																													
Trigger Event	Motion Detection, Alarm In, Audio Detection, Tampering, Trip Zone																																												
Event Notification	Remote S/W, Email (With Image)																																												
Audio In / Out	Line-in 1ea + Internal Mic 1ea / Line-out 1ea																																												
Alarm In / Out	Input 1ea / Output 2ea																																												
ENVIRONMENTAL																																													
Vandal Resistance	IK10																																												
Outdoor Ready	IP67																																												
Operating Temperature	-10°C ~ +60°C (+14°F ~ +140°F) *Starting Up at Above 0°C (32°F)																																												
Operating Humidity	0% ~ 90%																																												
ELECTRICAL																																													
Power Source	12VDC, PoE (IEEE 802.3af Class 3)																																												
Power Consumption	12.6W																																												
Approvals	FCC, CE, KC																																												
MECHANICAL																																													
Dimensions	Ø155.0mm x 58.3mm (Ø6.10" x 2.29")																																												
Weight	0.92kg (2.03lb)																																												

DIMENSIONS

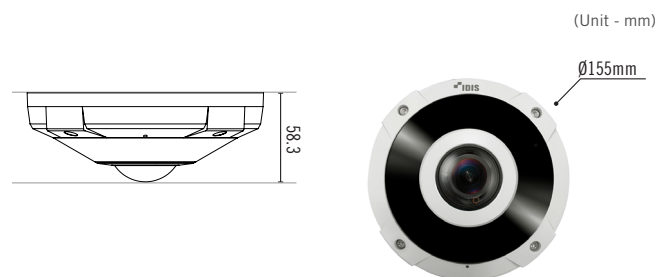

ACCESSORIES (OPTIONAL)



ACCESSORIES CONFIGURATION TREE

