



IndigoVision
Complete IP Video Security Solutions



Ultra 2K Fixed Dome Camera

Capture every detail with ultra-high resolution

With best in class performance, the IndigoVision Ultra 2K Fixed Dome Camera delivers rich, Full HD video and image clarity, in all lighting conditions. IndigoVision's SMART.core technology gives highly optimised H.264 compression and ACF+, reducing storage costs by up to 95%.

Key Features

OTHER	DNA	PoE	Firewall	Onvif Ready
	Outdoor	IK10	Low Temp	High Temp
	ACF	ACF+	Analytics	Motion Detection
	H.264	GUARANTEED 25fps	FPGA	AAC
PHYSICAL	ULTRA 2K	Day/Night	Low Light	WDR
	H.264	GUARANTEED 25fps	FPGA	AAC
INTELLIGENCE	DNA	PoE	Firewall	Onvif Ready
	ACF	ACF+	Analytics	Motion Detection
COMPRESSION	ULTRA 2K	Day/Night	Low Light	WDR
	H.264	GUARANTEED 25fps	FPGA	AAC
SENSOR	DNA	PoE	Firewall	Onvif Ready
	ACF	ACF+	Analytics	Motion Detection


Product Codes

Ultra 2K Fixed Dome Camera (PAL)	Camera with Enhanced Management Software
Ultra 2K In-Ceiling Fixed Dome, 3-9mm Lens	562427
Ultra 2K In-Ceiling Fixed Dome, 10-23mm Lens	562429
Ultra 2K Internal Fixed Dome, 3-9mm Lens	562417
Ultra 2K Internal Fixed Dome, 10-23mm Lens	562419
Ultra 2K Environmental Vandal Resistant Fixed Dome, 3-9mm Lens	562447
Ultra 2K Environmental Vandal Resistant Fixed Dome, 10-23mm Lens	562449

For more information:




Dimensions: In-Ceiling

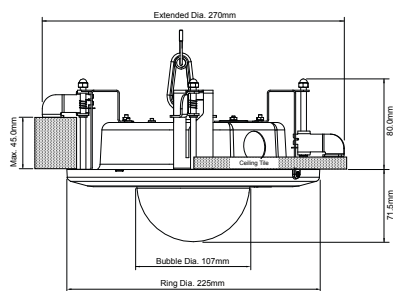


View on Side Face

Dimensions: Internal

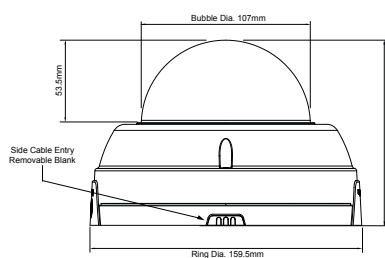

View on Side Face

Dimensions: Environmental Vandal Resistant

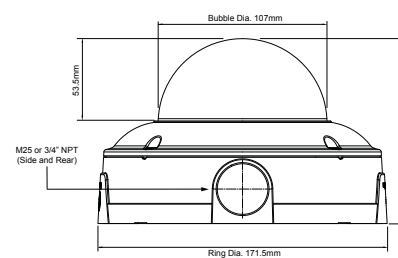

View on Side Face

Specification

Camera Features			
Sensor	1/3" Progressive CMOS		
Active Pixels (HxV)	2MP (1920 x 1080)		
Horizontal Resolution	> 850 TVL		
Minimum Sensitivity	Day: 0.05 lux (colour). Night: 0.005 lux (mono). 30 IRE, F1.2, 1/15s shutter. Day: 0.3 lux (colour). Night: 0.03 lux (mono). 50 IRE, F1.2, 1/30s shutter		
Dynamic Range	WDR 100dB Max		
Gain Control	Auto setting across a 42dB range		
Back Light Compensation	On/Off		
White Balance Mode	Auto/Indoor/Outdoor/Manual/Auto One Push		
Day/Night	True Day/Night with Mechanical IR Cut Filter		
Video Resolution	HD 1080p: 1920 x 1080 pixels, 720p: 1280 x 720 pixels; SD: 960 x 540 pixels, 640 x 360 pixels; 16:9 ratio		
Signal/Noise Level	> 39dB		
Lens Options	Standard 3mm - 9mm, Horizontal view angle 108.6° (W) 34.8° (T), F1.2, P-iris, Remote Zoom/Focus-Telephoto 10mm - 23mm Horizontal view angle 30.8° (W) 13.6° (T), F1.6, P-iris, Remote Zoom/Focus		
Zoom	3x optical standard; 2.3x optical telephoto		
Iris Control	Automatic P-Iris with Manual override		
Shutter	Rolling; Auto from 1/1 to 1/50,000 sec		
Exposure Control	Auto Iris/Auto Shutter/Slow AE		
Gimbal Adjustment	3 axis adjustment		
Video Compression	Full frame rate, full colour: H.264 (ISO 14496-10); 25fps guaranteed		
Video Bit Rate	User-configurable from 32Kbps up to 8Mbps		
Video Multi-Streaming	Up to 32Mbps total video output; Unlimited multicast connections. Up to seven 4Mbps unicast connections; Up to sixteen 1Mbps unicast connections		
Video Multi-Encoder	Up to two simultaneous resolutions with guaranteed frame rate including: 1080p (25fps), SD (25fps)		
Video Analytics ^A	Standard: ACF, ACF+, Motion Detection, Hooded. Advanced: Dual Tripwire, Congestion, Counterflow, Museum		
Audio Compression	AAC-LC (ISO 14496-3)		
Audio Bit Rate	User-configurable bit rates from 32Kbps to 160Kbps per channel		
Audio Protocol	RTP (RFC 3640)		
Audio Dual Encoder	Encoder A: 1 Stream Configuration plus Encoder B: 1 Stream Configuration		
Audio Resolution	Full Duplex 16kHz, 16 Bit Mono/Stereo Input, Mono Output		
Audio Input	Stereo / Mono line in terminal block connector. Nominal voltage: 1V p-p, Mic 30mV p-p. Mic type: dynamic or electret		
Audio Output	Mono line out terminal block connector. 1V p-p, Minimum load impedance: 16 Ohms		
Binary Input/Output	2 Pull up inputs for non powered contacts; 1 solid state opto-isolated relay output @500mA, LED output @20mA		
Data Input/Output [*]	1 Console port: RS232 up to 115.2 Kbps		
Network Interface	IEEE802.3 and IETF standards: 10/100 Base-T Ethernet, TCP, UDP, RTP, ICMP, IGMP, SNMP, DHCP, NTP, DNS, HTTP, HTTPS, SSH		
Network Security	HTTPS / Embedded Linux Firewall. Salted passwords, with MD5 encryption		
Time	Embedded real-time clock, NTP client with battery backup		
Regulatory	EN 55022 - Class A, EN 55024, EN 60068-2-29, EN 60068-2-1 & 2, EN 60068-2-30, EN 60068-2-6 & 64, CFR47 Part 15 subpart B -Class A, UL60950-1*, UL2043**		
IndigoVision Software Requirements	Control Center v11.0 or later		
ONVIF ^{AA}	Profile S		
Camera Features	In-Ceiling	Internal	Environmental Vandal Resistant
Dimension/Weight	225mm (ring dia.) x 151.5mm (h) (71.5mm below ceiling) and 1.1Kg	159.5mm (dia.) x 114mm (h) and 0.85Kg	171.5mm (dia.) x 114mm (h) and 1.1Kg
Housing	Aluminium with polycarbonate dome	Polycarbonate/ABS with polycarbonate dome	Diecast aluminium alloy with polycarbonate dome
Protection Rating	N/A	N/A	IP66/IK10 (IEC 62262), NEMA 250 4X
Electrical	PoE (802.3af Class 0) or 24V AC/DC @ 0.4A / 9.6W max	PoE (802.3af Class 0) or 24V AC/DC @ 0.4A / 9.6W max	24V AC/DC (PoE for configuration only) 24V @ 1.33A / 32W max. Power supply not included
Operating Temperature	0°C to 50°C	0°C to 50°C	-40°C to 55°C
Cold Start	0°C	0°C	-30°C

^{*} Internal and In-Ceiling Dome only. ^{**} In-Ceiling Dome only.

^A Advanced Video Analytics require a licence. ^{AA} Firmware upgrade is required for ONVIF Conformance.