

Editing Recorder/Player S-VHS

SR-S388E



- Easy-to-use editing recorder with high-quality S-VHS pictures and Hi-Fi audio sound
- Jog/Shuttle search
- Economical Editing with the proven RM-G800U*
- Random Assemble Editing function
- CTL Time Code System
- Provided RS-232C remote function
- Audio dubbing function and self audio dubbing function
- On-screen menu setup
- Other Features
 - Flying erase head
 - Auto head cleaner
 - Hi-Fi audio recording level controls and indicators
 - Headphone connector with volume control
 - 2 channels for Hi-Fi audio and 1 linear channel for monaural
 - Hi-Fi audio record ON/OFF (menu switch)
 - Digital hour meter indication
 - Wired remote control (optional RM-G30U)

* A Y/C filtering technique incorporated under license from **FAROUJIA** Laboratories Inc.

OPTIONAL ACCESSORIES




Cuts Edit Controller
RM-G800U



VC-G8030U cable

GENERAL	
Power requirement	AC 220 V-240 V, 50/60 Hz
Power consumption	22 W
Temperature	Operating: 5°C to 40°C(41°F to 104°F) Storage: -20°C to 60°C(-4°F to 140°F)
Humidity	Operating: 35% to 80% Storage: 5% to 80%
Operating position	Horizontal only
Dimensions	400 (W) × 94 (H) × 340 (D) mm (15-5/8" × 3-3/4" × 13-7/16")
Weight:	5 kg (10.6 lbs.)
Format:	VHS/S-VHS standard
Tape width	12.65 mm
Tape speed	(SP): 23.39 mm/sec (LP): 11.70 mm/sec
Maximum recording time	(SP): 3 hours with SE-180 video cassette (LP): 6 hours with SE-180 video cassette
Rewind/fast-forward time	Approx. 2 minutes, with SE-180 video cassette
VIDEO	
Signal system	PAL-type colour signal/PAL-type Y/C signal
Recording system	Rotary two head helical scan system Luminance: FM recording Colour: Down-covered direct recording

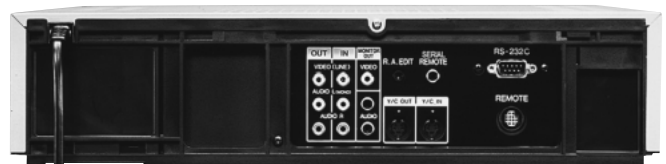

Input	Line: 0.5 to 2.0 Vp-p 75 ohms, unbalanced Y/C: Y: 1.0 Vp-p, 75 ohms, unbalanced C: 0.3 Vp-p, 75ohms, unbalanced (Burst)
Output	Line: 1.0 Vp-p, 75 ohms, unbalanced Y/C: Y: 1.0 Vp-p, 75 ohms, unbalanced C: 0.3 Vp-p, 75 ohms, unbalanced (Burst)
Signal-to-noise ratio	43 dB or more (S-VHS and SP modes)
Horizontal resolution	400 lines (S-VHS) 240 lines (VHS)
AUDIO	
Recording system	2 Hi-Fi tracks/monaural longitudinal track
Input	Line: -8 dBs, 50 k-ohms, unbalanced
Output	Line: -8 dBs, 1 k-ohm, unbalanced Phones: Variable, 40 ohms, unbalanced, ø3.5, -11 dBs (max)
Frequency response	20 Hz to 20 kHz (Hi-Fi) 100 Hz to 10 kHz (Normal, SP mode)
Dynamic range	85 dB or more (Hi-Fi)
Wow & flutter	0.006% WRMS or less (Hi-Fi) 0.30% RMS or less (Normal, SP mode)
ACCESSORY	
Provided	Y/C cable × 1