



XL Plus



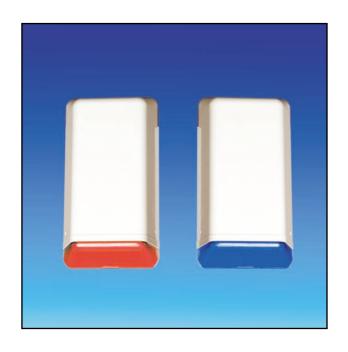



- Traditional Design
- Foam Resistant
- Simple to Install
- Vertical Mounting

Features:

- · Fully enclosed fibreglass PCB with sealed cover
- Unit is foam resistant
- Two tamper protection devices:

Cover removal

Removal of unit from walll

- Powerful piezo sounder provides up to 118dB(A) sound level at 1m
- High visiblity xenon strobe giving excellent visual alarm signal
- Dual flashing comfort LEDs
- Four different sound options to vary the speed and depth of the sound output
- Complete with 8.4V NiMH SAB backup battery
- Adjustable 2 to 20 minute cut-off timer to conform with noise abatement guidelines
- 3 year warranty

Flashguard Sounder products come with the following benefits:

- FREE Technical helpline
- Comprehensive logo design and screen printing service
- BS4737 compliant
- Compatible with any control panel
- Fully weather resistant to IP55
- Conformally coated electronics for complete protection against moisture
- · Simple to install:

Fixing screw kit provided Drilling template on carton

Specification:

Sounder type: Single piezo
Sounder output level @ 1m: 118dB(A)
Strobe frequency: 1Hz
Supply voltage: 10-15V
Current (Sounder): 350mA
Current (Strobe): 100mA
Current (Standby mode): 55mA

Battery: 8.4V 250mAH NiMH
Dimensions (H x W x T): 360mm x 190mm x 80mm

Decoy Units:

• Flashing LED module is available, providing a high intensity output from twin alternating LEDs, adding realism to a decoy unit (requires permanent 12V supply)



Klaxon Signals Ltd.

Wrigley Street, Oldham, Lancashire, OL4 1HW, UK.
Tel: +44 (0)161 287 5555 Fax: +44 (0)161 287 5511
E-mail: sales@klaxonsignals.com Web: www.klaxonsignals.com

