


# KD-KB1

# CONTROLLERS



## Outward Appearance

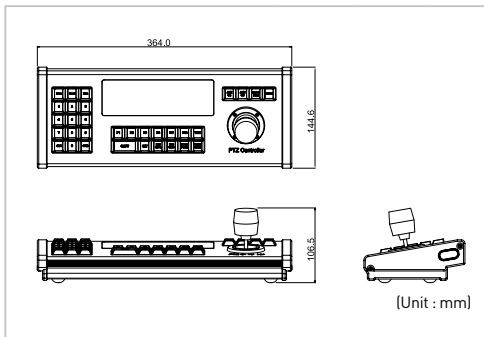

## Specifications


General Spec	Detail
Control Method	Pan/Tilt interface: RS-485 DVR interface: RS-485
Connection Type	RJ-11 6-pin modular
Pan/Tilt Range	4,000ft[1,029mm]
Keyboard/Keypad Type	PC Keyboard button Numeric Keyboard button
Joystick	Joystick 3-axis, variable-speed with zoom
LCD Display Type	Graphic display Display 4-line/30-character Alphanumeric LCD Display with blue backlight
Pan/Tilt Control	Keyboard button사용
Zoom Control	Twist Control사용
Operating Temperature	-0°C ~ +45°C
Air Humidity	10% ~70%
Voltage	12v DC ±2V
Power Consumption	Max 450mA
Dimension	372(W) × 103(H) × 145(D)
Weight	1.4Kg

# KD-KB2

# CONTROLLERS



## Outward Appearance

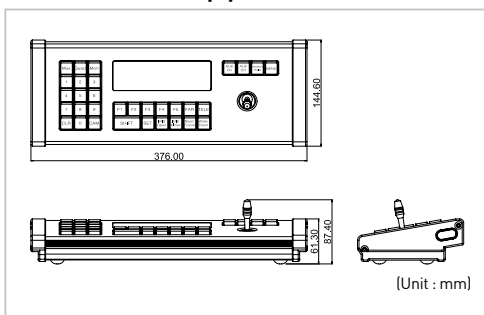

## Specifications

General Spec	Detail
Control Method	Pan/Tilt interface: RS-485 DVR interface: RS-485
Connection Type	RJ-11 6-pin modular
Pan/Tilt Range	4,000ft[1,029mm]
Keyboard/Keypad Type	PC Keyboard button Numeric Keyboard button
Joystick	Joystick 2-axis, variable-speed with zoom
LCD Display Type	Graphic display Display 4-line/30-character Alphanumeric LCD Display with blue backlight
Pan/Tilt Control	Keyboard button
Zoom Control	Keyboard button사용
Operating Temperature	-0°C ~ +45°C
Air Humidity	10% ~70%
Voltage	12v DC ±2V
Power Consumption	Max 450mA
Dimension	372(W) × 103(H) × 145(D)
Weight	1.4Kg