


KM-110, 55 Series(Plastic Mini Cameras) | MINI CAMERAS



Outward Appearance

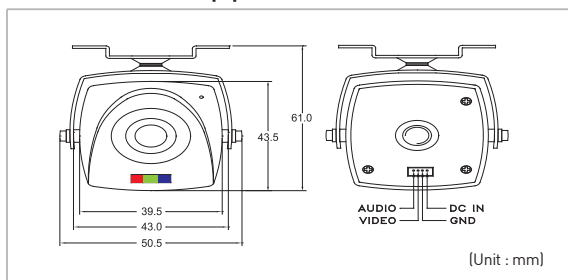

Features

- Plastic miniature camera
- High resolution picture quality through digital signal processor
- Wide voltage input operation
- Easy installation & operation

Lens Options

- FIXED BOARD LENS: 2.9MM, 3.6/3.7MM, 4.3MM, 6.0MM
- PHINHOLE LENS: 3.7MM, 4.3MM

Specifications

General Spec	KM-SM110		KM-CS55		KM-CS55H		
	NTSC	PAL	NTSC	PAL	NTSC	PAL	
Sensor	1/3" Interlaced color CCD		1/3" Interlaced color CCD		1/3" Interlaced color CCD		
H,Resolution	380		350		480		
Scanning system	525 Lines interlaced	625 Lines interlaced	525 Lines interlaced	625 Lines interlaced	525 Lines interlaced	625 Lines interlaced	
Video output	Composite (1.0Vp-p), 75Ω		Composite (1.0Vp-p), 75Ω		Composite (1.0Vp-p), 75Ω		
Synchronization	Internal		Internal		Internal		
Electronics iris	1/60 ~ 1/100,000	1/50 ~ 1/100,000	1/60 ~ 1/100,000	1/50 ~ 1/100,000	1/60 ~ 1/100,000	1/50 ~ 1/100,000	
Light sensitivity	0.1Lux, With F1.2 30IRE		0.2Lux, With F1.2 30IRE		0.5Lux, With F1.2 30IRE		
Gamma	0.45		0.45		0.45		
S/N Ratio	45dB		46dB		46dB		
Input voltage	DC8-18V		DC8-18V		DC8-18V		
OSD Control	N/A		N/A		N/A		
Power consumption	MAX 0.75[W]		MAX 0.9[W]		MAX 1.0[W]		
Operating temperature	-10°C ~ +55°C		-10°C ~ +55°C		-10°C ~ +55°C		
Storage temperature	-20°C ~ +70°C		-20°C ~ +70°C		-20°C ~ +70°C		
Operating Humidity	90% RH (non-condensing)		90% RH (non-condensing)		90% RH (non-condensing)		
Connection	Video	BNC Cable		BNC Cable		BNC Cable	
	Power	DC JACK		DC JACK		DC JACK	
Dimension	50.5(W) X 61(H)		50.5(W) X 61(H)		50.5(W) X 61(H)		
Weight	127g(Without Lens)		127g(Without Lens)		127g(Without Lens)		
Certification	CE/FCC		CE/FCC		CE/FCC		