








KSR 6 SERIES

KSR-604

World's Best Company in Digital Video Recording
Kodicom provides high quality display pictures with outstanding recording speed.




Main Functions

- 
REAL TIME MONITORING
 Simultaneous live images
- 
COMPACT PICTURE STORAGE
 Images are compressed to an average file size between 2-10Kb per picture using MPEG4 Algorithm
- 
EASY PICTURE RETRIEVAL
 Instant picture retrieval by date/time and camera number
- 
EVENT CONTROLLED RECORDING
 Reduces the amount of data and automatically records specific events
- 
REMOTE CONTROL
 Remote Control of PTZ cameras & other electronic devices
- 
PICTURE TRANSMISSION OVER NETWORK
 High quality picture transmission over PSTN, ISDN & LAN network
- 
MULTI SCREEN MONITORING
 1, 4 Split Screen available


Digital Video Recorder(Non-PC based)

KSR-604 Hot

Front/ Rear View

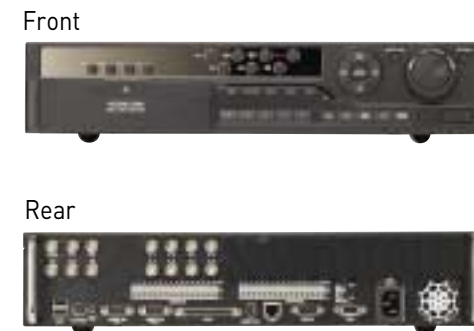

Outward Appearance

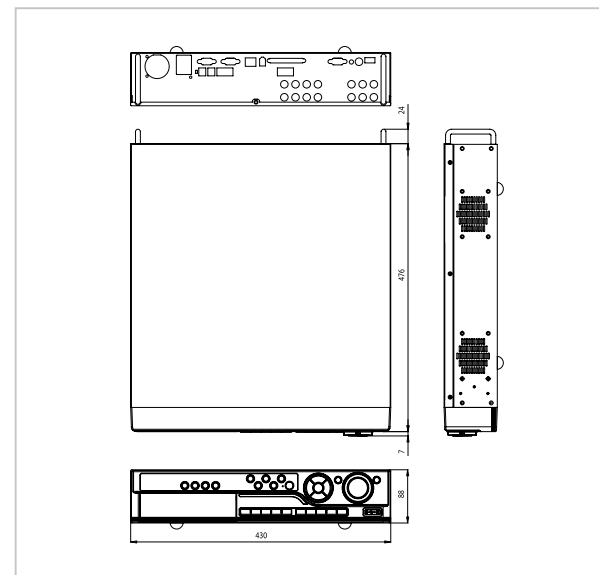

Functions by Screen



Application

Some recommended installation areas are Security Companies, Change Booths, Casinos, Pawnshops, Jewelers, Galleries, Exhibition Halls, Department Stores, Convenience Stores, Discount Offices, Hospital, Police Stations, Subway Stations, Airports, Banks etc.

Features

- High Quality Realtime Display – Max. 120fps(NTSC) 100fps(PAL)
- High Quality and High Speed Recording – Max. 120fps(NTSC) 100(PAL)
- Various Resolutions on Display and Recording – 704×480, 704×240, 352×240(NTSC), 704×576, 704×288, 352×288(PAL)
- MPEG4
- 1, 4 Division
- Watchdog Function
- Kodicom, Pelco, Dennard, Bosch, Samsung and many more PTZ protocol included
- Watermark Function
- Remote Observation Through Network
- Emergency Screen Auto Transfer to Center Software
- User friendly Graphic User Interface

Specifications

Model		KSR-604
Display	Speed	NTSC : 120fps PAL : 100fps
	Screen Division	1, 4 Division
Recording	Max. Speed (@CIF)	NTSC : 120fps PAL : 100fps
	Resolution	NTSC : 704×480, 704×240, 352×240 PAL : 704×576, 704×288, 352×288
Video	Recording Option	Continuous, Motion, Sensor, Pre-Alarm
	Format	NTSC/PAL
	CODEC	MPEG4
	Input	4ch
Audio	Output	VGA, CVBS, S-Video, Programmable spot out (1ch quad, 4ch full)
	CODEC	ADPCM
Alarm	Input	4 Ports
	Output	4 Ports
Network	Transmission	Ethernet (RJ45), PSTN (optional)
	Protocol	TCP/IP(support dynamic IP)
Backup	Device	USB, CD-RW, SCSI, IEEE1394, Network, DVD-RW (optional)
Other Function	Remote Control	Remote Software (CMS)
	Remote Alarm	E-mail, CMS report
	PTZ	RS232C/485
	W/D Function	Yes
	Image Authentication	Watermark
	Language	10 Languages
	Password	Multi-Level User Password Authorization
USB	2 Ports (USB 2.0)	
Working Temperature	0°C ~ +50°C	
Power Source	AC 100 ~ 240V, 50/60Hz	
Dimensions	430mm(W) × 88mm(H) × 483mm(D)	
Weight (net)	10.5Kg (23.1lbs)	

※ Specifications subject to change without notice.

RECORDERS

CAMERAS

ACCESSORIES