


AHD761

D/N 720P AHD IR Camera



78 x 66.5 x 88mm (WxHxD)

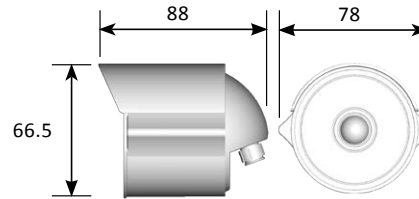

- Video Output: AHD 720P / Analog 1280H
- AHD Cameras transmit data that is not encoded resulting in no process and no delay real time and complete transmission.
- Long transmission distance—Coaxial cable (3C/5C): 300M / 500M, Twisted cable: 300M
- Seamless compatibility with the standard Analog equipment
- Automatically activates IR LED: Blow 10Lux

D/N 720P AHD IR Camera			
Model		AHD761A3.6	
Model		AHD761A6	
Lens	Focal length		3.6mm
	Iris		F2.0
	Angle of view	H	72.2°
		V	52.9°
D		94.3°	
Power Input Voltage		DC12V ±10%	
System		NTSC or PAL	
Pick Up Element		1/3" CMOS Image Sensor	
Effective Pixels		1,305 (H) x 977 (V)	
Scanning System		Progressive Scan	
Menu Control		OSD Control	
Sync. Mode		Internal	
Infrared Cut Filter		Auto Selectable, Automatic Switch from Color Mode to Monochrome	
Resolution		1280 (H) x 720 (V) @ 30/25 fps	
Minimum Illumination		0.02 Lux / F1.8, 0 Lux (IR On)	
S/N Ratio		More Than 55dB (AGC Off)	
Auto Gain Control		Auto (16 Steps)	
White Balance		ATW / AWC / INDOOR / OUTDOOR / MANUAL / AWB	
Shutter	Auto	1/60(1/50)S ~ 1/50,000S	
	Manual	1/30(1/25)S, 1/60(1/50)S, FLK, 1/240S, 1/480S, 1/1,000S, 1/2,000S, 1/5,000S, 1/10,000S, 1/50,000S	
Sense-Up		OFF / AUTO (X2 ~ X30)	
D-WDR		OFF / ON / AUTO	
Back Light Compensation		OFF / BLC / HSBC	
Noise Reduction		2DNR & 3DNR	
Defog		OFF / AUTO	
Privacy masking		OFF / ON	
Privacy masking Zone		4 Zones	
OSD Language		ENG / CHN1 / CHN2 / GER / FRA / ITA / SPA / POL / RUS / POR / NED / TUR	
Video Output		AHD720P / 1280H	
Power Consumption		3.8W	
Operation Temperature		- 40°C ~ + 50°C (-40°F ~ 122°F)	
IP Rating		IP68	
Window		φ59 Heat Resistant Glass	
Infrared LED	Peak Wavelength		850nm
	Beam Spread		30°
	Radiant Distance		20M
Dimension		78mm (W) x 66.5mm (H) x 88mm	
Weight		325g	