



LILIN NAV 3025 25-channel recorder supports LILIN IP cameras, PTZ domes, and DVRs/NVRs. Up to 25 channels 1080P/3M/5M/8M network streaming, recording, and display. Tower chassis, Compact size, built-in software RAID system, support up to 4 x 3.5" HDD hot swap trays. video achieve, and SmartSearch support. Dual streaming decoding mode supported.


Single Screen support, up to 25 channels video display. Support multi-channels playback for remote or local. Built-in Gigabit Ethernet. Recording resolutions are 3,840 x 2,160, 2592 x 1944, 2048 x 1536, 1920 x 1080, 1280 x 1024, etc. NAV 3025 supports audio recording, circular recording, limited recording, video archiving, low bitrate recording, and remote network RAID.

### FEATURES :

- LILIN IP cameras, PTZ domes, and DVRs/NVRs are supported.
- Up to 25 channels 1080P/3M/5M/8M Network streaming, recording, and display
- Tower chassis, Compact size, built-in software RAID system, support up to 4 x 3.5" HDD hot swap trays.
- Dual streamings decoding mode supported
- Single Screen support, up to 25 channels Video display.
- Achieving management and record file sync.
- Support multi-channels playback/record file backup for remote or local.
- Built-in Gigabit Ethernet port.

### DIMENSIONS : (Unit : mm)

200 x 206 x 315 mm

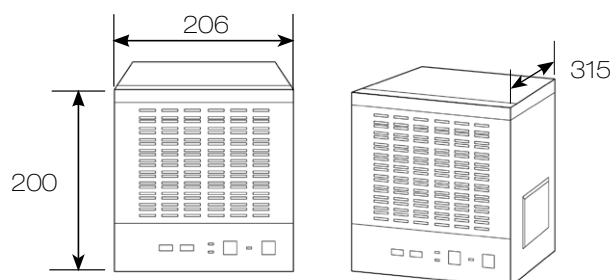

**SPECIFICATION :**

Name		NAV 25CH RECORDER
Model		NAV3025
Network video support		LILIN IP camera, LILIN IP PTZ dome, LIIN DVR/NVR, NAV live server
Network video input		Up to 25 channels at 1080P/3M/5M/8M
Network video format		H.264 / MJPEG
Max Network throughput		Max. 250 Mbps download and 250 Mbps upload speed
Raid support		4 x 3.5" HDD hot swap trays
Recording	Schedule	7 days x 24 hrs time table, recording mode configurable
Recording mode	Recording mode	Alarm, motion, schedule, and manual
	Recording speed	Max 8MP 30fps, 5MP 12 fps, 3MP 15 fps, 1080p at 120 fps, and ROI recording supported
	Recording resolution	3840x2160, 2592x1944, 2048x1536, 1920x1080, 1280x1024, 1280x768, (720x480 / 720x576), 320x240
	Alarm recording	Face detection, audio detection, tamper, motion, DI alarm detection
	Audio recording	Yes
	Circular recording	Yes / size customizable
	Limited recording	Yes / days customizable
	Video archiving	Yes
	Low bitrate recording	Yes
Remote Network raid	Yes	
Playback	Search	Date, time, event, POS SmartSearch, motion SmartSearch, record tagging
	Resolution	3840x2160, 2592x1944, 2048x1536, 1920x1080, 1280x1024, 1280x768, (720x480 / 720x576), 320x240
	Playback speed	FR: 1/8, 1/4, 1/2, 1X, 2X, 4X, 8X, 16X 32X / FF: 1/8, 1/4, 1/2, 1X, 2X, 4X, 8X, 16X, 32X
	Backup	Max. 25 channels, AVI file format supported
	Remote video	Navigator Server/Navigator Client/DVR/NVR/IP camera SD card supported, max. 25 channels
Video input	Support quantity	Max. 25 channels
	Camera name	20 characters
	Channel editing	Mouse drag-n-drop
	Digital zoom	Yes, ePTZ supported
	Grouping	User grouping authentication assignable for eMap and Navigator 1.0
	Remote monitoring	Yes
Video output	HDMI output	x1 / max. 1080P
	DVI / VGA output	DVI and VGA share same channel
	TV wall	Single Screen, max. 25 channels
	Split screen	4, 9, 16, 25
	Dual stream technology	Multi-channel displays D1 and full screen displays 1080P/3M/5M/8M resolution
	Multi-screen	Single Screen
Video archiving	Video archiving & sync.	Individual camera configurable, scheduling and instant archiving, sync recording data with Navigator/NVR/DVR/IP camera SD card.
Alarm / event	Alarm management	Alarm popup for full screen, PC sound, redirect IP Camera's digital output, eMail snapshots, redirect a PTZ preset recall
	Alarm recording	Pre-alarm:1 - 5 seconds and post-alarm: 5 - 50 seconds
	Event	Various alarm log including video loss, stop recording, schedule, logon, operation log
	Digital output	Controllable via IP cameras
Accessories	Keyboard	PIH-931D keyboard controllable via RS-485 for PTZ, ePTZ, and ROI features
	Audio	PCM Two-way audio, audio recording
	Pos/barcode scanner/ATM	RS-232 / PS/2
	Protocols	ARP / TCP/IP / HTTP / SMTP / DNS / PPPoE
	Mobile support	iPhone and Android
	IPScan	Supported, easy-to-setup for IP address
Hardware	CPU	Intel® processor i3-4150
	RAM	4GB DDR3-1333 x1, extendable up to 16GB
	Chipset	Intel® H87/H97 Express
	Display card	Intel® HD Graphics 4400 display card
	Usb port	USB 2.0x6
	System FAN	110mm fans x 1
	Raid control	Intel On board
	Raid mode	RAID 0, 1, 5, 10
	OS HDD	32GB SATA DOM x1
Other	Watch dog	NAV monitoring station
	DST	Daylight saving time by Windows OS
	Language	English, Chinese, Spanish, French, Italian, Japanese, Russian, Portuguese, Simplified chinese Chinese, Czech, Slovene, German
	OS	Windows embedded standard 7
Power and environment	Power supply	250W Power Supplies 80 PLUS Bronze
	Operating environment (Main board)	Operating temperature range 5°C - 35°C (41°F - 95°F), Non-Operating temperature range -20°C - 80°C (-68°F - 176°F), humidity range 0% - 95% (non-condensing)
	Dimension (HxWxD)	200 x 206 x 315 mm
	Color	Black
	Weight	12.13 lbs(5.5kg)