eyesite for windows

Easy to use software adds flexibility and practicality to eyesite II0 and I40 remote video products.

- Full colour motion video and audio from remote sites
- · View live video and save snapshots
- Remote pan, tilt, and zoom controls
- Portable use on PC or Laptop
- Supports PSTN and IP transmission

See & hear what you're missing...

Now you can check on your premises from the office, home or anywhere in the world without the expense of dedicated equipment, eyesite for windows provides an simple, portable and effective tool for remote viewing and alarm verification.

Performance Every Time

eyesite for windows captures fluid movement and delivers clean, clear picture quality. Advanced audio decoding complements video to ensure full comprehension of events at the remote site.

Affordability through Synergy

evesite for windows uses the modem or network connection of your PC and its inherent processing power. When paired with an eyesite 110 or 140, an extremely cost-effective solution results.

Wide Compatibility

eyesite for windows is compatible with Windows XP, 2000, ME, NT and 98 systems. It supports H.324 and can be used in conjunction with standards-compliant third-party devices. eyesite for windows also supports a wide range of remote

Supports Multiple Remote Sites

eyesite for windows can be configured to dial to fifty different sites and to receive incoming calls for visual intruder verification.

Capture & Save Snapshots


Simple drag-and-drop control allows you to take multiple snapshots of events, then review, share and save them to your PC.



Applications

eyesite for windows provides unprecedented value for any business or operation seeking to improve productivity, awareness and security.

- Retail monitoring
- Remote supervision
- Remote alarm verification
- Loss prevention
- Access control viewing



- For use with PTZ (Pan, Tilt, Zoom) cameras
- Save up to nine preset views per camera

manual control

of PTZ cameras

Source

• Select one of six cameras, or a sequence


Image control

- Resolution
- Frame rate vs. quality





eyesite for windows

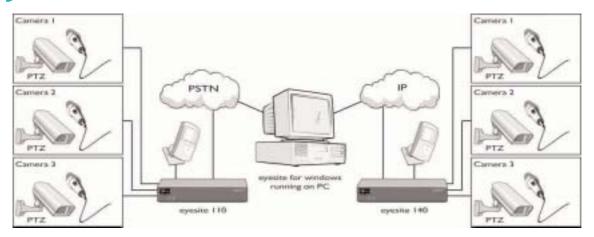

Technical specifications

System requirements

- •Windows® 98, 2000, XP, NT or ME
- Pentium 2 processor or above
- 64MB RAM
- I 6MB free disk space
- Sound Card
- CD ROM Drive
- V.80 compatible modem for PSTN
- 802.3 compatible network card for IP operation
- Direct X v 8.0 or higher

Industry Recommendations Supported

ITU-T H.324

- Video:H.263
- Audio:G.723
- Control Protocols:H.245
- Multiplexing
- PSTN:H.223
- IP:Motion Media

Format

•CD ROM with online help and quick start guide

Video

• PC Video Format: VGA, SVGA, XGA

Video Window Size

- •CIF:352 x 288 pixels
- •QCIF:176 x 144 pixels

Frame rate

- PSTN CIF 7fps, QCIF I 5fps
- IP CIF, 15fps, QCIF, 30fps

Audio

• Receive only audio monitoring of remote site via sound card

Network

- PSTN via modem card (see website for range of supported modem cards)
- •IP via network card

Companion products

- eyesite™ II0
- eyesite™ I 40

Software features

Snapshots

- 16 simultaneous pictures
- Facility to save in Windows bitmap (.BMP) format
- Enhanced snapshot picture quality
- •Approx 300kB per image

PTZ Camera control (Pan, Tilt, Zoom)

- •GUI with 9 presets per camera
- •PTZ cameras supported*
 - Sony
 - E-Line
 - Panasonic
 - Kalatel
 - Pelco

Security Features

- •Secure PIN access
- Individually configurable for remote sites

Connect Options

- 50 number dial list supporting PSTN numbers and IP addresses
- Remote site name and location
- Configurable PIN for each connection

*Requires eyesite | 10 or 140

Windows is a trademark of Microsoft Corporation.

