

*Quality video over ordinary telephone wire...®*

## Model NV-314A Passive Video/Audio Transceiver



### Features:

- ▶ Full-motion monochrome or color video and audio at distances up to:  
1,000ft (300m) when used with another passive transceiver  
3,000ft (1km) when used with an active receiver such as the NV-518A
- ▶ No power required
- ▶ Exceptional interference rejection
- ▶ Supports "up-the-coax" type control signals
- ▶ RJ-45 and RCA jack connections
- ▶ Limited lifetime warranty

The NVT Model NV-314A Video/Audio Transceiver is a passive (non-amplified) device that allows transmission of real-time monochrome or color video over Unshielded Twisted-Pair (UTP) telephone wire. Baseband (composite) signals of any type are supported.

Applications include Security/Surveillance, Video Distribution, or Distance Learning.

The unparalleled interference rejection and low emissions of the Model NV-314A allow video signals to co-exist in the same wire bundle as telephone, datacom, or low-voltage power circuits. This allows the use of a shared or existing cable plant. Up-the-coax type signal may be sent over the same wire pair.

The NV-314A comes with an RJ-45 patch-cord. For Rack-mounting, use the NV-418AR, which contains hardware equivalent to two NV-314As.

Network Video Technologies, Inc.  
1755 E. Bayshore Road, Suite 8B • Redwood City, CA • 94063 • USA  
(+1) 650.562.0600 • 800.959.9870 • FAX (+1) 650.365.9575  
email:info@nvt.com • <http://www.nvt.com> • Internet Keyword: NVT

**NV-314A**



Quality video over ordinary telephone wire...®

# Model NV-314A Passive Video Transceiver

## Technical Specifications

### Video

Attenuation			
DC to 5 MHz	0.5	dB	typ
Common-mode rejection			
15 KHz to 5 MHz	60	dB	typ
Impedance			
Coax, female BNC	75	ohms	
UTP, Screw Terminals	100	ohms	

### Audio

Attenuation			
20 Hz to 20 KHz	1.5	dB	typ
Impedance	600	ohms	
Signal: Line Level	+4	dBm	max

### Wire Type

Network Wiring	Two Unshielded Twisted Pairs
	24 AWG (0,5 mm) or thicker
Category Type	2 or better
Impedance	100 ± 20 ohms
DC Loop Resistance	52 ohms per 1,000 ft (18 ohms per 100 m)
Differential Capacitance	19 pF/ft max (62 pF/m max)
Wire Length	see below

### Connector Interfaces

Video, Audio Female RCA jacks  
Twisted-pair interface  
RJ-45 non-keyed jack wired for two twisted-pairs, as shown:



3ft (0.9m) RJ-45 patch cord included

### Power

No external power required

### Environmental



Temperature	-20 to +75°C
Humidity (non-condensing)	0 to 95%
ESD Susceptibility (200 pf probe)	20 KV

### Mechanical

Dimensions	3.75 x 2.50 x 0.40in (95,2 x 63,5 x 10,1 mm)
Weight	4.0 oz (113 g)
Material	Gray ABS
Mounting	Two 3M Dual Lock™ adhesive strips

Specifications subject to change without notice.

## Typical Applications

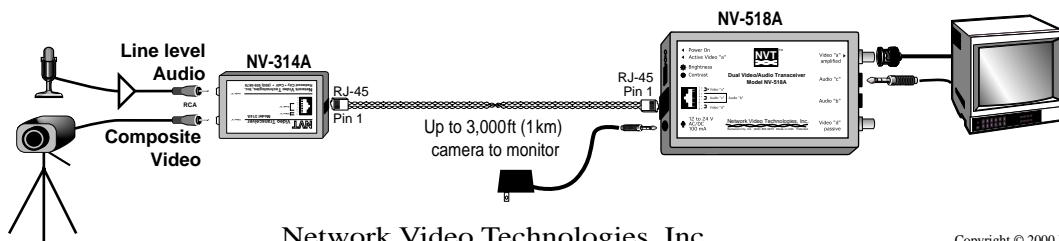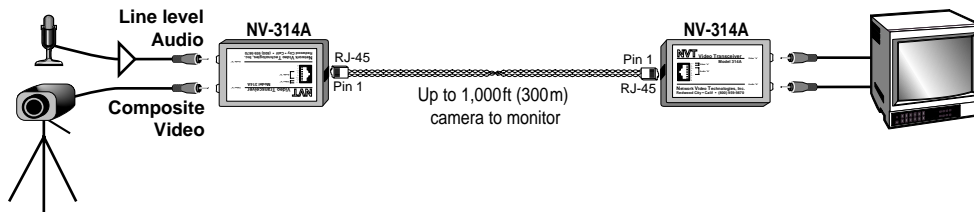

Network Video Technologies, Inc.

1755 E. Bayshore Road, Suite 8B • Redwood City, CA • 94063 • USA  
 (+1) 650.562.0600 • 800.959.9870 • FAX (+1) 650.365.9575  
 email:info@nvt.com • http://www.nvt.com • Internet Keyword: NVT

Copyright © 2000 NVT, Inc.

411-91-1-I

# NV-314A