

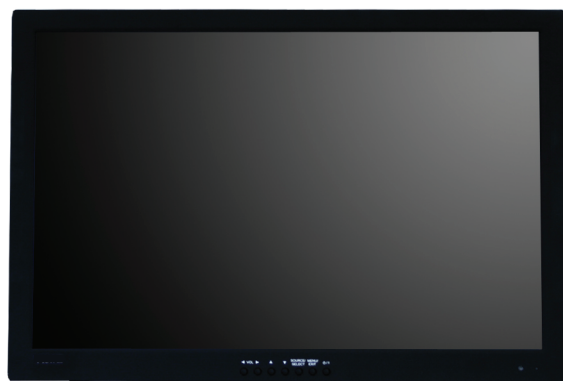


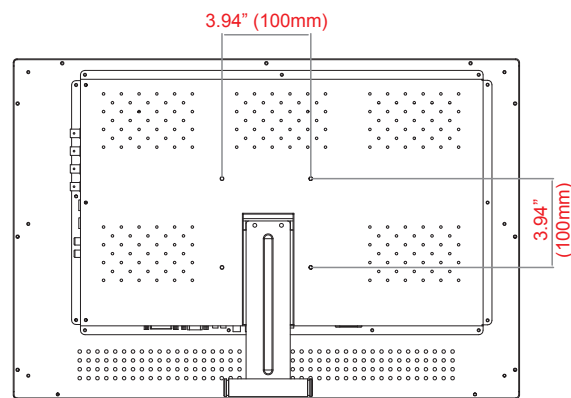


MODEL #	24RTC
DISPLAY	
Screen Size	24"
Max. Resolution	1920 x 1200 @60Hz
Pixel Pitch	0.270mm x 0.270mm
Brightness	400cd/m²(Typical)
Contrast Ratio	1000:1
Aspect Ratio	16 : 10
Viewing Angle (H/V)	160°/160°
Display Color	16.7 Million
Response Time	< 5ms
Video System	NTSC / PAL
Frequency (H)	31 ~ 80Khz
Frequency (V)	56 ~ 75Hz
INTERFACE	
AV(Composite) In/ Out	2 / 2
S-Video In / Out	1 / 1
RGB In(15Pin D-Sub)	1
Component(Y, Pb, Pr, Sound L/R) In	1
DVI-In	1
HDMI In	1
Trigger In	1
AV(Composite) Sound In/Out (RCA Type)	2 / 2
PC Stereo In/Audio Out	1 / 1
AUDIO	
Built in speaker	2W x 2
SPECIAL FEATURES	
Multi Display Function	PIP / PBP
Filter Type	3D Comb filter / DeInterlace
LCD Protection Glass	Not Available
Trigger Sensor / Image Rotation	YES / Not Available
Video Resolution(Max)	520 TV Line
Camera Mounting Hole	1(Bottom)
Multi-lingual Language	English, Spanish, French, German, Italian, Portuguese, Dutch
DIMENSIONS	
Outline Dimension (W x H x D)	22.44" x 15.08" x 3.74" (570mm x 383mm x 95mm)
Net Weight	19.84 lbs (9.0kg)
MOUNT	
VESA	100mm x 100mm
GENERAL	
Transmitter - IR Remote Control	YES
Power - Electrical Ratings - Consumption	AC100 ~ 240V(50/60Hz) 90W
Warranty - Parts/ Labor - MTBF (Approx.)	3 Year / 3 Year 50,000 Hours
Operating Temperature	32 - 104°F / 0 - 40°C
Regulations	TUV-NRTL (=UL), CB, FCC(B), CE-Emc(LVD)
Compatible Mounts - WALL - CEILING - Rack	VZ-WM05, VZ-WM10, VZ-WM30, VZ-WM31 VZ-CMK01, VZ-CMK-05, VZ-CMK07 Not Available

24RTC ADVANTAGES:

- 24" LCD CCTV Monitor
- BNC, VGA, HDMI, DVI
- 3D Comb-filter, De-interlace, Built-in Speakers
- 3-Year Warranty

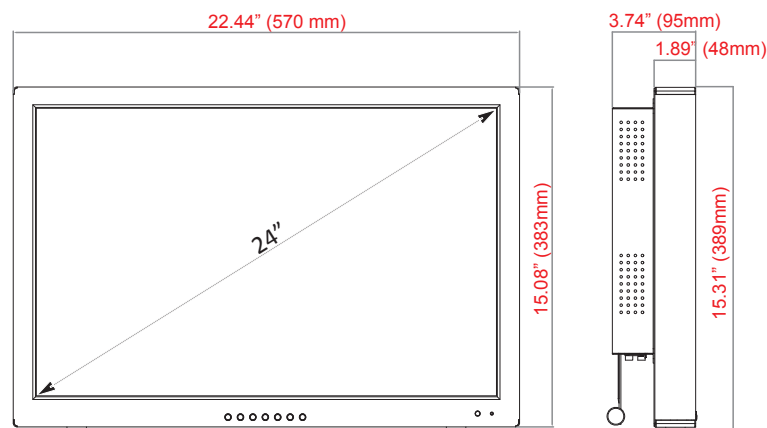

INTERFACE

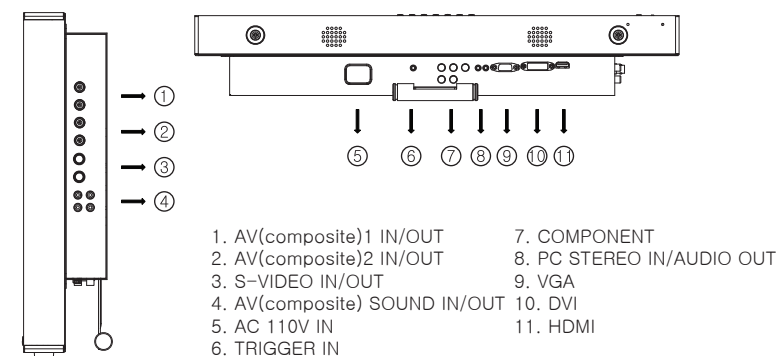

Contact Point

- <http://www.orienttechnology.co.kr>
- 1242 Apo industrial zone, In-ri, Apo-up, Gimchun-shi, Kyungbuk, Korea
- TEL: +82-54-430-8902 / FAX: +82-54-430-8904