



# EH2400/HS2400 Enclosure

## INDOOR, SECURITY RATED, CORNER MOUNT

### Product Features

- Aluminum Construction (EH2400); Steel Construction (HS2400)
- Tamper Resistant
- Adjustable Camera Mount
- Flush Ceiling or Mid-Wall Mounting
- Ideal for Today's Smallest Box Cameras
- Attractive, Rugged Powder Coat Finish






The **EH2400** and **HS2400** enclosures are designed to provide low cost, tamper-resistant, corner mounting for fixed camera applications. They can be mounted flush against a ceiling, or placed mid-wall in high ceiling applications, without compromising enclosure integrity.

The smaller frontal area and reduced overall size create an unobtrusive enclosure ideal for today's smaller cameras. The **EH2400** and **HS2400** will accommodate Pelco box cameras with vari-focal lenses that do not exceed eight inches in total length.

The **HS2400** is constructed of heavy gauge steel and features a half-inch thick, impact-resistant Lexan® window; the **EH2400** is constructed from aluminum and has a 3/16-inch thick Lexan® window. Both enclosures have tamper-resistant button-head screws which prevent them from being opened by unauthorized personnel.

Three conduit knockouts allow wires to be delivered from the wall (either side) or ceiling.

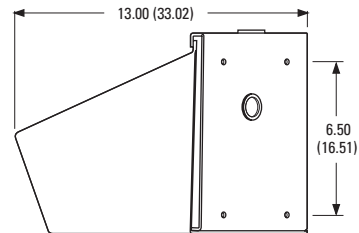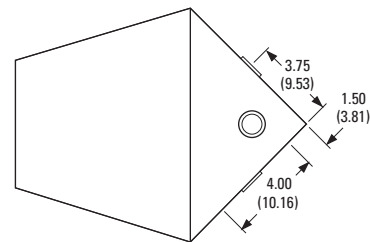

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS; ALL OTHERS ARE INCHES.



DataFAX  
SPEC: 21468  
MANUAL: 214686 (EH2400), 214706 (HS2400)

C1468 / REVISED 10-02

International Organization  
for Standardization;  
Registered ISO 9001



# TECHNICAL SPECIFICATIONS

## MODELS

EH2400	Indoor enclosure; security rated, corner mount, aluminum
HS2400	Indoor enclosure; security rated, corner mount, steel

## MECHANICAL

Camera Mounting	Adjustable tilt table
Maximum Camera and Lens Size	Accepts camera and lens combinations* (including BNC connector) up to 4.0" H x 4.0" W x 8.0" L (10.16 x 10.16 x 20.32 cm)
Viewing Window	
EH2400	0.187-inch (4.76 mm) thick Lexan®
HS2400	0.50-inch (12.7 mm) thick Lexan®
Viewing Window Area	4.25" W x 2.56" H (10.8 x 6.50 cm)
Cable Entry	0.875-inch (2.22 cm) diameter or 1.125-inch (2.86 cm) diameter knockout access through rear walls and top
Enclosure Mounting	Eight 0.25-inch (.64 cm) diameter openings on protected rear surfaces
Security	Tamper-resistant button-head screws (hollow Allen wrench supplied)

\*Assumes lens is fully extended.

## GENERAL

Construction	
EH2400	0.125-inch (3.175 mm) thick aluminum
HS2400	0.134-inch (3.40 mm) formed, 10-gauge steel
Finish	Gray polyester powder coat
Environment	Indoor
Unit Weight	
EH2400	6.57 lb (2.98 kg)
HS2400	18.23 lb (8.27 kg)
Shipping Weight	
EH2400	9 lb (4.08 kg)
HS2400	20 lb (9.06 kg)



**Pelco Worldwide Headquarters:**  
3500 Pelco Way, Clovis, California 93612-5699 USA  
**USA & Canada** Tel: (800) 289-9100 • FAX (800) 289-9150 • DataFAX (800) 289-9108  
**International** Tel: (559) 292-1981 • FAX (559) 348-1120 • DataFAX (559) 292-0435  
[www.pelco.com](http://www.pelco.com)

Lexan® is a registered trademark of the General Electric Company.  
Specifications subject to change without notice.  
©Copyright 2002, Pelco. All rights reserved.