





**New color version features the Sony Super HAD CCD!**

- 1/3" Black & White 420 lines 0.1 lux
- 1/3" Color DSP 480 lines 0.3 lux
- Small size allows discreet installation
- Weatherproof housing with integrated hood
- 33° or 70° field of view
- Industry standard 1/4-20 mount
- Adjustable swivel mount included
- 12V plug-in power supply included
- 1 year warranty

Model	BB33W	BB70W	BC33W	BC70W
Other Models	BBI33W (Ivory)	BBI70W (Ivory)	BCI33W (Ivory)	BCI70W (Ivory)
Field of View (lens)	33° (8mm)	70° (3.6mm)	33° (8mm)	70° (3.6mm)
Image Sensor	B/W 1/3" CCD		Color 1/3" Sony Super HAD CCD	
TV System	EIA		NTSC	
Picture Elements (pixels)	500 (H) × 580 (V)		768 (H) × 494 (V)	
Horizontal Resolution	420 TV Lines		480 TV Lines	
Min. Illumination	0.1 lux at F2.0		0.3 lux at F2.0	
Signal to Noise Ratio	More than 50dB		More than 50dB	
Synchronizing System	Internal		Internal	
Video Output	1Vp-p 75ohm		1Vp-p 75ohm	
Gamma Correction	r = 0.45		r = 0.45	
White Balance	—		Auto 2100°K - 8200°K	
Electronic Iris (auto)	1/60-1/100,000		1/60-1/100,000	
Power Requirement	12VDC ±20%		12VDC ±20%	
Operating Current	100mA w/ regulated power in		130mA w/ regulated power in	
Operating Condition	+14 ~ 122°F (-10°C ~ +50°C)		+14 ~ 122°F (-10°C ~ +50°C)	
Measurement – ø (dia.) × L	ø0.75 × 2.6 inches (ø19mm × 66mm)		ø0.83 × 3.2 inches (ø21mm × 82mm)	
Weight (Camera Only)	1.6 oz. (45g)		1.8 oz. (50g)	
Included Accessories	• UL Approved 12V 300mA plug-in power supply • Adjustable swivel mount			
Optional Accessory	EC60PV - 60' extension cable with power/video connectors			

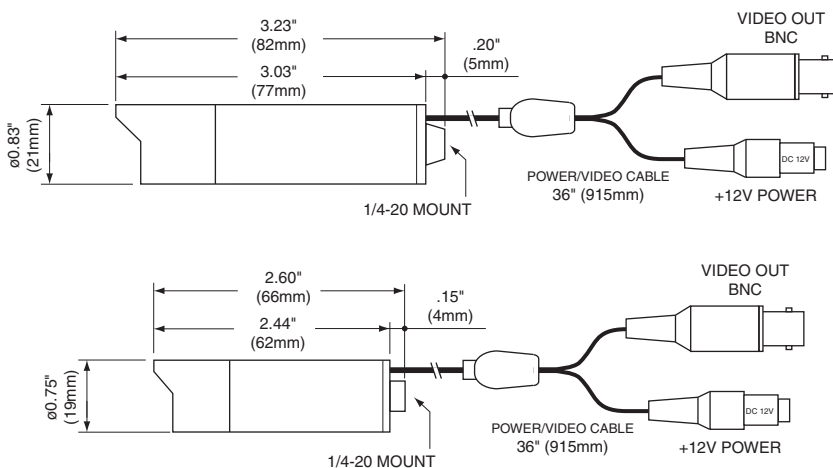

Specifications subject to change without notice