

[Up][CH9, CH10 & CH11][CH8, CH12, CH13 & CH14][CH15 & CH16][Extruded Housings][Internal Housings][Dummy Housings]

CAMERA HOUSINGS - CH15 & CH16

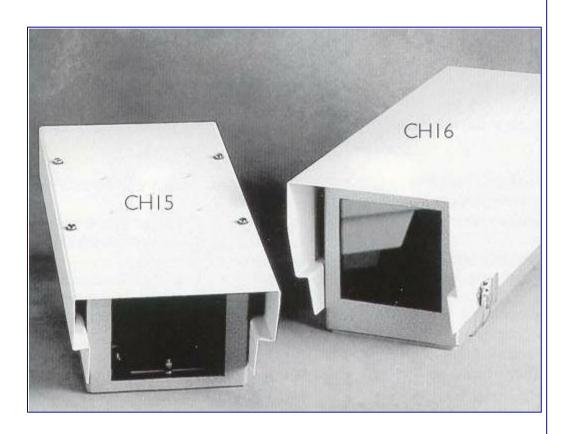

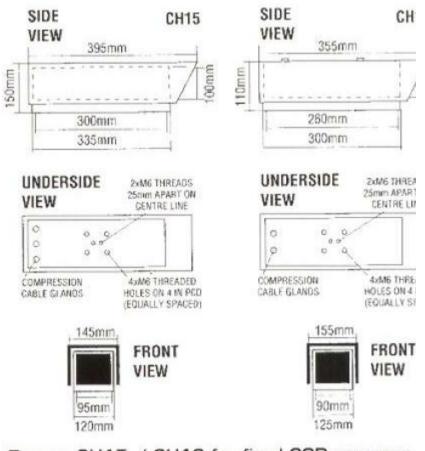

Range: CH15 / CH16 for fixed CCD cameras auto iris lenses.

These low cost camera housings have been specifically designed and manufactured to accommodate fixed CCD cameras and auto iris Both can be mounted with either a two screw CCD or 4" PCD mounting.

SPECIFICATION	CH15	CH16
Weight	2.5 kg	2 kg
Heater/Demister Power	35 W	35 W
Recommended wall bracket	WB 14	WB 14
Recommended swivel mount	SM 1	SM 1
Operating voltages	Optional: AC 240v 110v/24v DC 12v/24v	Optional: AC 240v 110v/24v DC 12v/24v

- Manufactured from 16 gauge aluminium sheeting with durable oyster hammer and white powder coat finish
- IP66 weatherproof standard approval
- Laminated window
- Stainless steel external fittings for longer life
- Conventional style hood (lift-off)
- Heater / demister
- Adjustable camera platform
- 3 cable glands and 11 way terminal block
- Choice of mounting (see diagram)

Camera insulation kit

Operating voltages from 12v DC to 240v AC

- Manufactured from 16 gauge aluminium sheeting with durable oyster hammer and white powder coat finish
- IP66 weatherproof standard approval
- Laminated window
- Stainless steel external fittings for longer life
- Full length sunshield (forms part of hood)
- Heater / demister
- 2 cable glands and 11 way terminal block
- Choice of mounting (see diagram)

[Up][CH9, CH10 & CH11][CH8, CH12, CH13 & CH14][CH15 & CH16][Extruded Housings][Internal Housings][Dummy Housings]

email <u>Shawley Webmaster</u> with questions or comments about this site.