


CAM4310

Full HD Fixed Dome Network Camera



- Full HD & Real Time Network Camera
- Up to 1920 x 1080 Video Resolution
- H.264/MPEG4/MJPEG 2 Simultaneous Video Streams
- Surveon Video Intelligent Ready
- MicroSD/SDHC Local Storage for Alarm Capture
- Power over Ethernet (IEEE 802.3af)

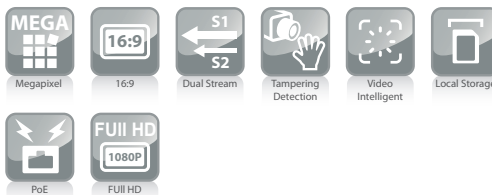

Product Specification


Camera	
Image Sensor	1/2.7" 2 megapixel progressive scan CMOS
Lens	4.2 mm, F1.8 (default)
WDR	N/A
Day/Night ICR	N/A
IR LED	N/A
Min Illumination	1.6 Lux @ F1.8
Iris Control	N/A
Shutter Time	1/5 ~ 1/15,000 s
Viewing Angle	Diagonal: 122°~35° Horizontal: 96°~28° Vertical: 72°~21°
Camera Angle Adjustment	Pan 0° ~340° Tilt 30° ~90°
Pan/Tilt/Zoom Functionalities	N/A
Video	
Video Compression	H.264/MPEG-4/MJPEG
Resolution	Up to 1920 x 1080
Frame Rate	25 fps at 1080P (1920 x 1080) 30 fps at SXGA (1280 x 1024) 30 fps at HD720 (1280 x 720) 30 fps at VGA (640 x 480) 30 fps at QVGA (320 x 240)
Video Stream	Dual stream at H.264, MPEG-4, and MJPEG simultaneously
Bit Rate	32K ~ 10Mbps, VBR, CBR, controller frame rate and quality
Video Control	AGC (Auto Gain Control), AWB (Auto White Balance), BLC (Back Light Compensation), image adjustment
Surveon Video Intelligent	Motion detection, tampering detection (blocked, redirected, defocused, or spray-painted), missing object, foreign object, intrusion detection, forbidden area
Video Jack	N/A
Audio	
Built-in MIC	N/A

Audio Compression	32KHz, ADPCM
Audio Input/Output	3.5mm phone jack
I/O and Event Management	
Alarm In	2, terminal block
Alarm Out	1, terminal block
Video Buffer	5 second pre-alarm, 30 second post-alarm
Event Action	Send snapshot or video clip by FTP or email, record to NAS, record to local storage, trigger DO
Network	
Supported Protocols	IPv4, ARP, TCP, UDP, ICMP, DHCP, NTP, DDNS, SMTP, FTP, HTTP, CIFS, PPPoE, UPnP, RTP, RTSP, RTCP, 3GPP
Ethernet	10/100 Base-T / RJ45
System	
Local Storage	microSD/SDHC x 1 (Class 4/Class 6 only)
RS-485	1 (2 pin on terminal block)
USB	N/A
SDK	Surveon SDK 2.0
Viewing System	
OS	Microsoft Windows XP/Vista/7
Browser	Microsoft IE 6.0 or above
Software	Surveon VMS 2.4.1
General	
Temperature	Operation: -10°C ~ 50°C (14°F ~ 122°F) Storage: -30°C ~ 60°C (-22°F ~ 140°F)
Humidity	5 to 90%
Power	12VDC 1.5A ; PoE (IEEE 802.3af) with Class 3
Power Consumption	Max. 7.5W
Dimension	ø128.8mm x 115mm (H) ø5.07" x 4.52" (H)
Weight	Net: 700g (1.54lb.) Gross: 1370g (3.00lb.)
Certification	Safety: LVD EMC: FCC, CE

CAM4310

Full HD Fixed Dome Network Camera


Part Names and Functions

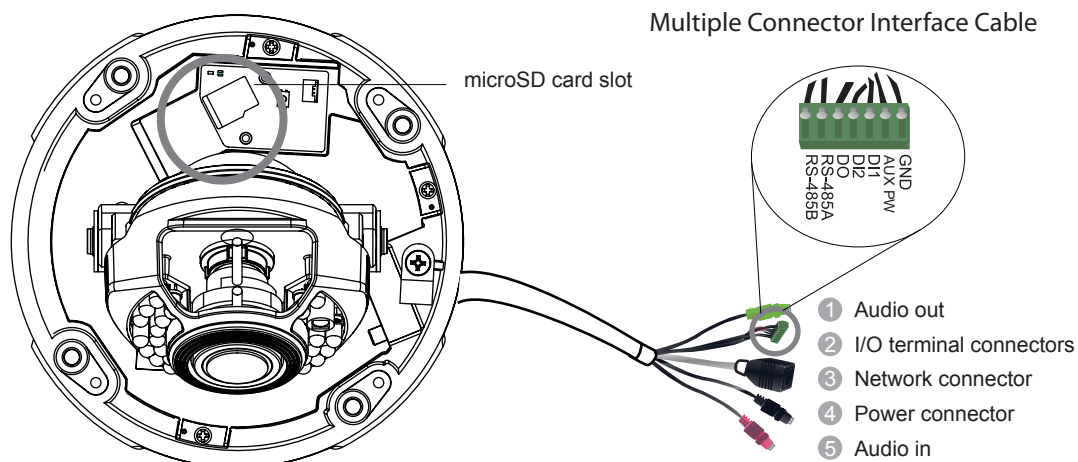


Appearance

Unit:mm(inches)

Side View

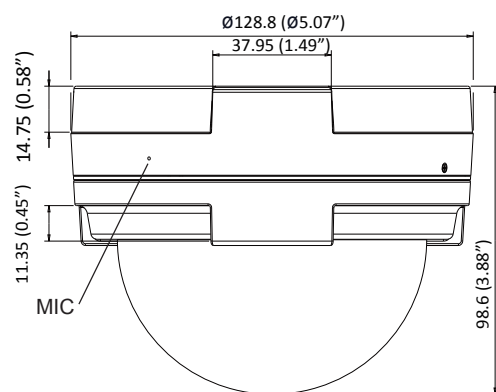

Bottom View

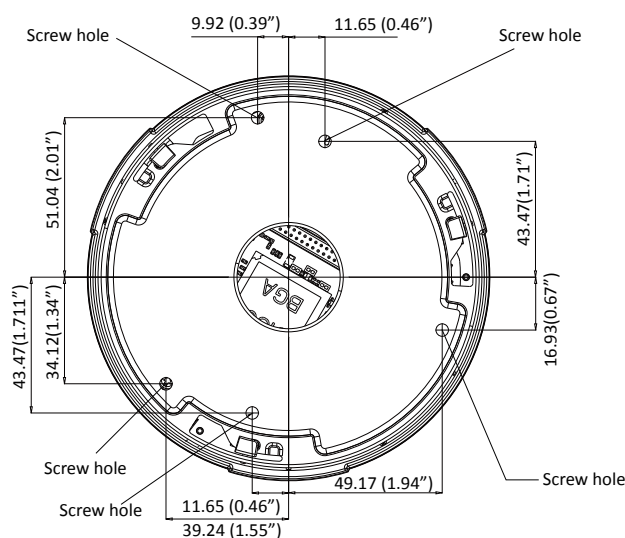

Package Content

Contents	Quantity
Quick Installation Guide	1
Product DVD	1
CAM4310	1
Screw Hole Indicator Sticker	1
Anchors and Mounting Screws	3

Ordering Information

Part Number	Description
CAM4310-0055	2 Megapixel Fixed Dome Network Camera with f4.2 mm, F1.8 lens
CAM4310-0056	2 Megapixel Fixed Dome Network Camera with f6.0 mm, F1.8 lens
CAM4310-0057	2 Megapixel Fixed Dome Network Camera with f8.0 mm, F1.8 lens
CAM4310-0058	2 Megapixel Fixed Dome Network Camera with f12.0 mm, F1.8 lens

Optional Accessories

Part Number	Description
ZBracketL-0050	L type bracket
ZPWR18W-0030	Power Adapter
CAM4310-0050	CAM4310 with Power Adapter