

Features

- 4 video, 16 alarm inputs; 4 relay outputs
- Recording up to 25/30fps on DI; 100/120fps on CIF resolution
- Live monitoring via HSDPA, UMTS, EDGE and GPRS (require mobile data modem)
- Playback and video extraction via WiFi (require WiFi gateway)
- Fast detachment and shock protection design


TeleEye RX504 is a robust video recording server designed for fleet security applications. By using the award-winning SMAC-M multi-streaming compression technology, TeleEye RX504 delivers no compromise performance on simultaneous recording and transmission via mobile network.

TeleEye RX504 can continuously record videos of every single detail during the vehicle in service. By connecting TeleEye RX504 to a mobile data modem, the driver can push a button to trigger the TeleEye RX504 to send an alarm and seamless video back to the central monitoring station via mobile networks such as HSDPA, UMTS, EDGE or GPRS in an In conjunction to a WiFi emergency situation. gateway, the recorded data can be reviewed and extracted to the central storage server via a WiFi network after the vehicle returning back to the depot.



Mobile Data Modem

Live video monitoring via mobile network

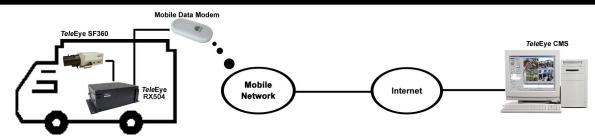

Playback and video extraction via WiFi





China

U.K.

Croatia

Tele Eye Group Hong Kong (Head Office) Signal Communications Limited

Tel: (86) 755 2671 2122 Email: info@TeleEye.com.cn Tel: (65) 6745 3921 Email: sales@TeleEye.com.sg

Singapore Tel: (44) 1628 776061 Email: ukinfo@TeleEye.com Tel: (385) 52-383101 Email: info@TeleEye.hr

Units 202-3, 2/F, Laford Centre, 838 Lai Chi Kok Road, Kowloon, Hong Kong Hong Kong: (852) 2995 5992 International: (852) 2995 5996 Email: info@TeleEye.com Fax: (852) 2995 5901

Philippines Tel: (632) 3650897 Email: contact@TeleEye.com.ph Mauritius Tel: (230) 686 5238 Email: info@TeleEye.com.mu South Africa Tel: (27) 11 557 9200 Email: info@TeleEye.co.za

TeleEye Mobile Video Recording Server

Specifications

MODEL	RX504
	VIDEO INPUT
	(P): PAL/CCIR, 625 lines, 25 frames per second
STANDARD	(N): NTSC/EIA, 525 lines, 30 frames per second
STANDARD	composite video, I Vp-p, BNC
NO. OF CHANNELS	4
	VIDEO OUTPUT
	(P): PAL/CCIR, 625 lines, 25 frames per second
STANDARD	(N): NTSC/EIA, 525 lines, 30 frames per second
	composite video, 1 Vp-p, BNC
NO. OF CHANNELS	l I
DISPLAY SCREEN	Full, Quad
DISPLAY FRAME RATE	25/30fps D1, 100/120fps CIF
	RECORDING
MODE	Manual, event-driven
HD TYPE	2.5 Inch IDE interface
	(P): 25fps at 720 X 576 pixels; 100fps at 360 X 288 pixels
MAX. RECORDING RATE	(N): 30fps at 720 X 480 pixels; 120fps at 360 X 240 pixels
	Forward, Backward, Pause, Step Forward, Step Backward, x10 Fast Forward, x100 Fast
PLAYBACK	Forward
	COMMUNICATION
NETWORK	RJ-45, IO/IOO Base-T Ethernet (auto-sensing)
MAX. TRANSMISSION FRAME RATE	25/30fps D1, 50/60fps CIF
VIDEO COMPRESSION	SMAC-M
USB	USB 2.0, I2Mbps
WIRELESS COMMUNICATION	HSDPA, UMTS, EDGE, GPRS, IEEE 802.11b / 802.11g
	EVENT HANDLING
	External alarm, tamper, video motion detection, video loss,
EVENT TYPE	disk full, power interruption, system fail, disk usage, overheat
ACTION TYPE	Live camera, buzzer, dial back, recording,
ACTION TYPE	relay control, PTZ, email notification, SMS
EXTERNAL ALARM INPUTS	16 x NC/NO
	RELAY SWITCH
NO. OF CHANNELS	4
MAX. RATING	24V AC, 1000mA
	POWER
VOLTAGE	I0-24V DC (I2V typical)
MAX. RATING	15W
	OPERATING ENVIRONMENT
AMBIENT TEMPERATURE	5°C - 40°C
RELATIVE HUMIDITY	< 85% (no condensation)
	MECHANICAL DESIGN
DIMENSION	295mm (L) x 227mm(W) x 100mm (H)
NET WEIGHT	
NET WEIGHT	2.68kg



*Tele*Eye Group Hong Kong (Head Office) Signal Communications Limited

Units 202-3, 2/F, Laford Centre, 838 Lai Chi Kok Road, Kowloon, Hong Kong International: (852) 2995 5996 Hong Kong: (852) 2995 5992 Fax: (852) 2995 5901 Email: info@TeleEye.com

China Singapore U.K. Croatia Tel: (86) 755 2671 2122 Email: info@TeleEye.com.cn

Tel: (65) 6745 3921 Email: sales@TeleEye.com.sg
Tel: (44) 1628 776061 Email: ukinfo@TeleEye.com
Tel: (385) 52-383101 Email: info@TeleEye.hr

Philippines Tel: (632) 3650897

Mauritius Tel: (230) 686 5238

South Africa Tel: (27) 11 557 9200

Email: contact@TeleEye.com.ph Email: info@TeleEye.com.mu Email: info@TeleEye.co.za