

Electrical

Input Voltage = 10 to 12V DC
 Power Consumption = 150mA (Max)
 Transmitter/Receiver Frequency = 125Khz
 FCC Part 15 certified for class B digital device
 Anti-Tamper Optical Protection (seperate alarm output)
 Output Formats: Prox Card = Wiegand 26 bit
 Keypad = Wiegand 26 bit

(The Prox. card output is customisable for other Wiegand formats.)

Environment

IP68 water and dust proof
 Operational temperature range -30° C to + 65° C

Dimensions


H120 x W90 x D25mm

Warranty

5 Year warranty



Order Code

107505-090 ES634PP prox/pin keypad
 107505-080 ESPROX reader only (no keypad)

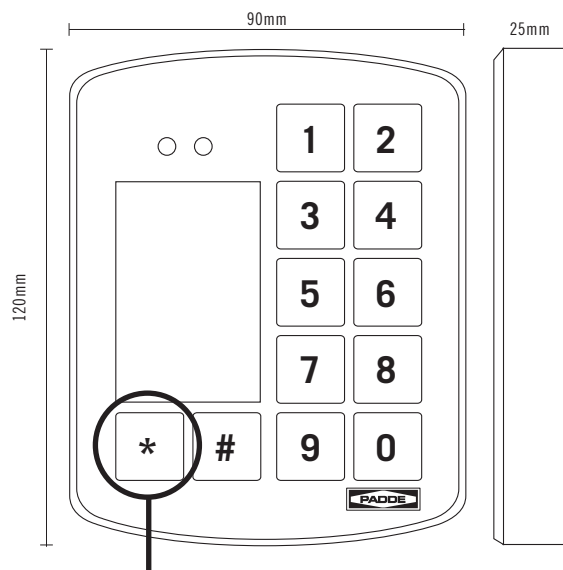

Beyond Durable

The sensors embedded below the metal surface of the keys on all PADDE Piezo keypads are made of a ceramac alloy that only needs pressure to activate. There are no moving parts to wear out. All Numbers are laser etched for years of use without wear.

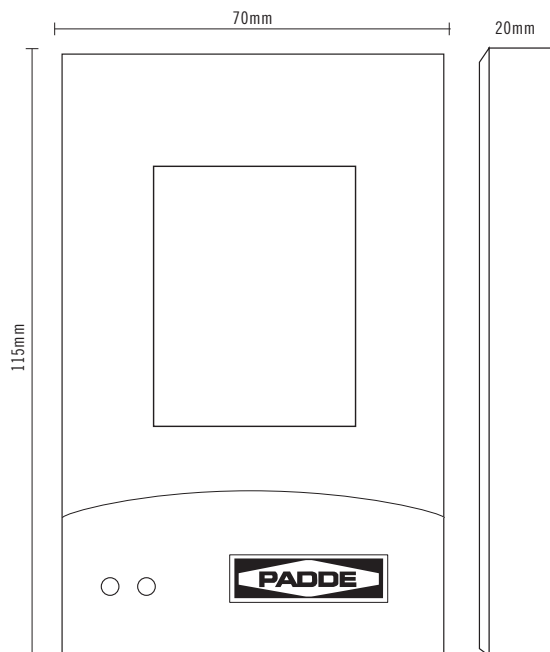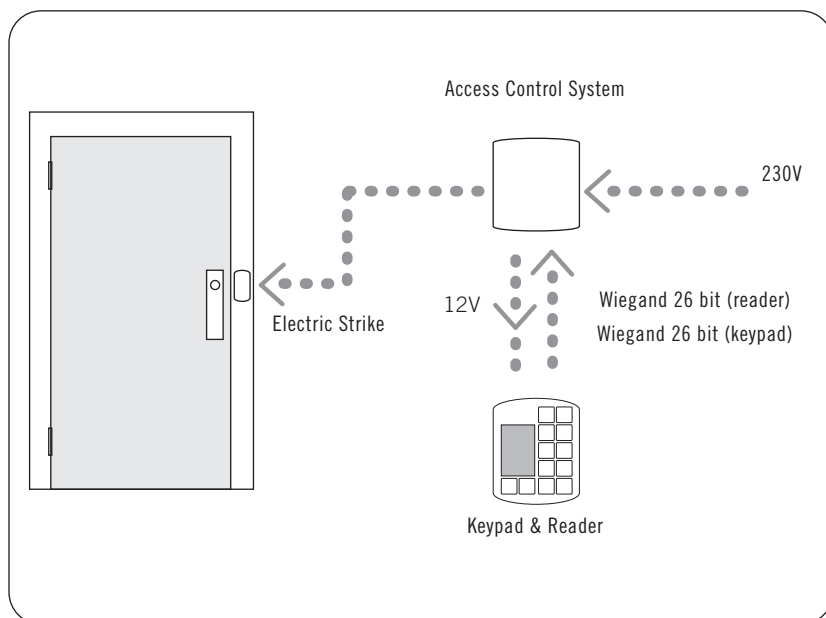

107505-080 ESPROX reader only

Distributed by:



superior quality, design and innovation

WWW.PADDE.COM.AU