

CAMERA HOUSINGS : EXTRUDED

Super Connoisseur, Extended Length

DESCRIPTION

PRODUCT IMAGE

Ideal for most applications, especially for larger length cameras and lenses. Suitable for outdoor use.

Extruded aluminium section construction. Sunshield is adjustable along the length of the housing body. Hinge retained body allows easy access for maintenance. Adjustable mounting plate to suit most camera/lens assemblies. Demister & sunshield fitted as standard.

A 10 function telemetry receiver, wiper kit and internal and external fan kits are available for this product.




TECHNICAL INFORMATION

Dimensions	Housing: 627x155x148 (LWH) Sunshield: 560x168mm (LW)
Internal Dimensions	400x125x100mm (LWH)
Unit Weight	Whole housing 6kg (inc. sunshield)
Temperature Range	-20° C to +60° C
Environmental	IP66 BS EN 60 529
Power Supply	230/110V AC @ 50/60Hz, 24V AC
Colour	Housing body: Polyester powdercoat RAL7032 leatherette full gloss. Sunshield: Polyester powdercoat hipca white smooth full gloss.

Fuse Rating	2A @ 230/110V AC, 5A @ 12/24V AC/DC
Material	Aluminium extrusion (housing body & sunshield), glass filled polyester thermoset (front & rear caps)
Cable Entry	1x25mm threaded plug to accept conduit, 1xcable gland (16mm), 2xcable glands (20mm)
Cable Range	5 - 10mm & 6 - 12mm diameter
Electrical Connection	Mains supply connections via fused pcb mounted terminal blocks.
Relative Humidity	Up to 95% non-condensing
Fan	optional (see HS01-EFKIT and HS01-FKIT)
Demister	7 Watts nominal, 25 Watts max. PTC resistor heating element.
Wash/Wipe	Optional, see WA05 & WA25 for washers, WI01 for wiper.

TECHNICAL IMAGE

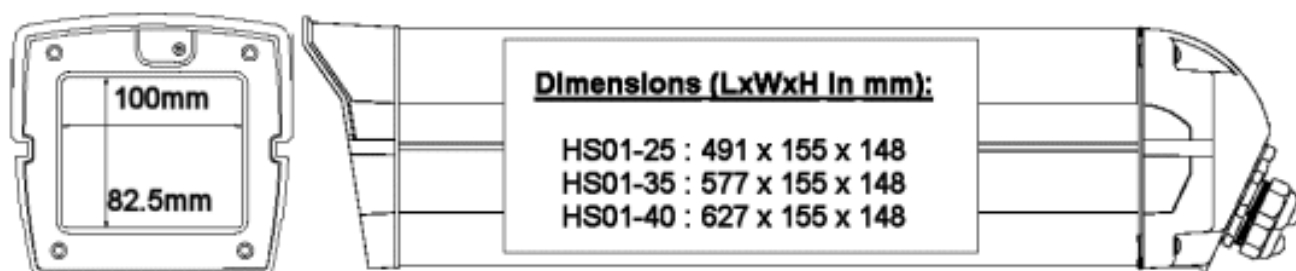

PRODUCT CODES & VERSIONS

HS01 (Super Connoisseur Housing 230V AC)
 HS01/L (Super Connoisseur Housing 24V AC)

DSHS01UK.I2.PDF , Issue Date 03/03 **Page 2**
 Copyright © 2003 Bewator Ltd. All rights reserved.



Bewator Limited, Albany Street, Newport, South Wales, NP20 5XW, UK.

T: +44 (0)1633 821000 F: +44 (0)1633 850893 E: sales@bewator.co.uk W: www.bewator.co.uk