



SVFT-WM Wall Mount

- Indoor/Outdoor
- Compatible with SurveyorVFT, Surveyor4A and Roughneck V926
- For pendant installation
- Easy installation

The SVFT-WM Wall Mount offers a mounting alternative for pendant configurations of the SurveyorVFT, Surveyor4A and Roughneck V926 Camera Domes. The wall mount can be used for indoor applications with a small inconspicuous mounting plate for an aesthetically pleasing look; for rugged indoor or outdoor applications, a large mounting plate and weatherproof gasket is provided to form a moisture seal. In addition, the outdoor mounting plate provides a more secure installation that is less susceptible to vandalism; tamperproof mounting hardware (not included) can be used for added security. The accessory kit contains all necessary hardware for installation except mounting hardware appropriate for the mounting surface.

ASSOCIATED EQUIPMENT AND ACCESSORIES

Model SurveyorVFT Camera Dome System: A compact high-speed dome unit with an integral receiver, pan/tilt drive and camera/lens module. The SurveyorVFT system is modular and can be outfitted for indoor and outdoor use, with a variety of mounting accessories, and for various camera/lens module types. Refer to Product Specification V134.

Technical Information

MECHANICAL

| | |
|-------------------------|--|
| Application: | Indoor or outdoor. |
| Mounting: | Wall or vertical structure. |
| Mounting Thread: | Standard 1-1/2 in. NPT-F pipe thread. |
| Dimensions: | Height (H): 4.9 in. (124 mm). Width (W): 3.5 in. (89 mm). Depth (D): 7.5 in. (191 mm). |
| Weight: | 1.4 lb (0.6 kg). |
| Construction: | Cast aluminum, steel and stainless steel. |
| Finish: | Painted white. |

ENVIRONMENTAL

| | |
|-----------------------------------|-----------------------------------|
| Storage Temperature Range: | -40 to 150° F (-40 to 60° C). |
| Storage Humidity Range: | 0 to 90% relative, noncondensing. |

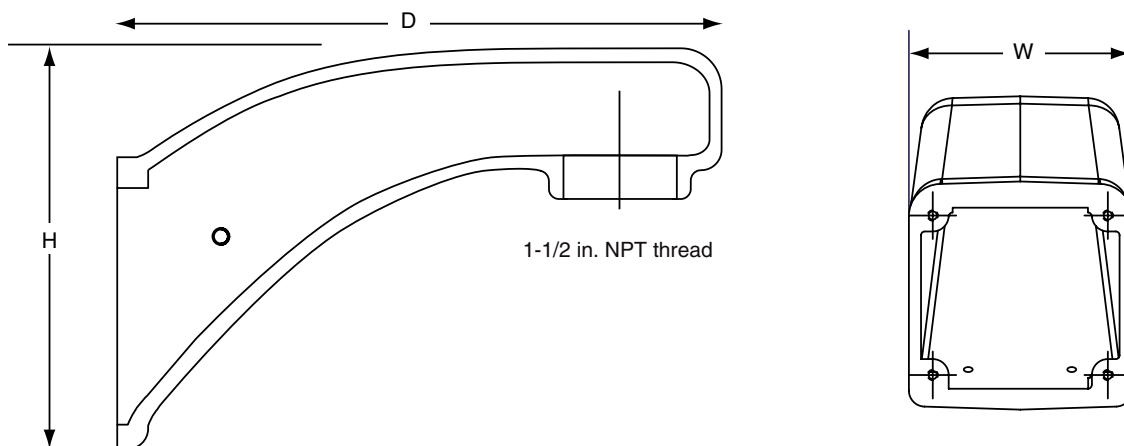


Figure 1: Dimension Drawing

TECHNICAL SPECIFICATIONS
DIVISION 13 - SPECIAL CONSTRUCTION
SECTION 137__ - SECURITY CCTV SYSTEM

SECURITY SYSTEM

PART 2 - PRODUCTS

2.01 GENERAL

- A. All equipment and materials used shall be standard components, regularly manufactured, regularly utilized in the manufacturer's system.
- B. All systems and components shall have been thoroughly tested and proven in actual use.
- C. All systems and components shall be provided with the availability of a toll free 24-hour technical support phone number from the manufacturer. The phone number shall allow for immediate technical assistance for either the dealer/installer or the end user at no charge.
- D. All systems and components shall be provided with an explicit manufacturer warranty.

2.02 WALL MOUNT

- A. The wall mount shall allow pendant installations of particular proprietary camera dome systems.
- B. The wall mount shall be usable in indoor and outdoor applications.
- C. The wall mount shall allow mounting on a wall or vertical structure.
- D. The wall mount shall have a standard 1-1/2 in. NPT-F pipe thread.
- E. The wall mount shall have the following mechanical specifications:
 - 1. Mounting: Wall or vertical structure.
 - 2. Dimensions: Height: 4.9-in. (124 mm).
Width: 3.5-in. (89 mm).
Depth: 7.5-in. (191 mm).
 - 3. Weight: 1.4-lb (0.6 kg).
 - 4. Construction: Cast aluminum, steel and stainless steel.
 - 5. Color: White.

The Wall Mount shall be Vicon Industries model number SVFT-WM.

