



## PRODUCT SPECIFICATION

**MODEL:** VC12PS-120 AND VC23CADP

**PRODUCT CODE:** 3565 AND 4291

**DESCRIPTION:** CAMERA POWER SUPPLY AND C-MOUNT ADAPTER

The VC12PS-120 power supply provides 12 VDC output for CCTV cameras. It converts 120 VAC to 12 VDC. The VC12PS-120 is UL listed.

The VC23CADP adapts C-mount lenses to CS-mount cameras.

### Technical Information

#### VC12PS-120

##### Electrical

Input Voltage: 120 VAC, 60 Hz,  $\pm 5\%$ .

Output Voltage: 12 VDC.

Power Consumption: 18 W, max.

Heat Equivalent: 1.0 btu/min (0.26 cal/min).  
 Note: These figures represent the conversion of 100% of the electrical energy to heat. Actual percentage of heat generated will be less and will vary from product to product. These figures are provided as an aid in determining the extent of cooling required for an installation.


Input Connector: Two flat parallel spade pins and one grounding pin for conventional AC outlet.

Output Connector: 6-ft 2-conductor cable with coaxial connector.

NOTES	SPEC NO.	REV.	SEC.
	565	799	2

#### Mechanical

Dimensions: Height (H): 3.3 in. (85 mm).  
 Width (W): 2.7 in. (68 mm).  
 Depth (D): 2.9 in. (74 mm).

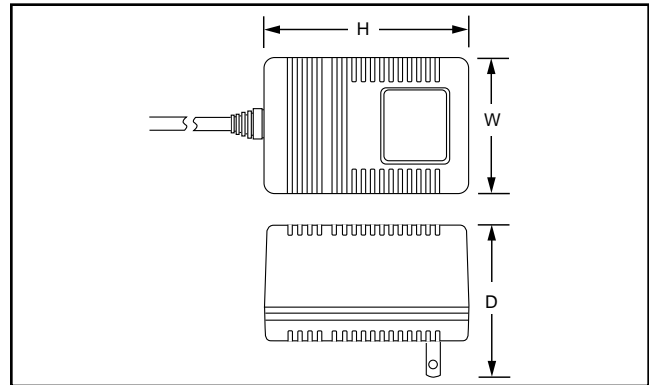

Weight: 1.7 lb (0.77 kg).

Shipping Dimensions: Height: 4.9 in. (124 mm).  
 Width: 3.0 in. (76 mm).  
 Depth: 4.0 in. (102 mm).

Shipping Weight: 1.8 lb (0.8 kg).

Shipping Volume: 0.034 ft<sup>3</sup> (0.0096 m<sup>3</sup>).

#### VC23CADP

##### Mechanical

Dimensions: 1.1 in. (28 mm) diameter.

Weight: 0.02 lb (0.009 kg).

Shipping Dimensions: Jiffy bag, 4 × 7 in. (102 × 178 mm).

Shipping Weight: 0.06 lb (0.03 kg).