

# ViconNet Network Video Recorders and Workstations



- Configured with ViconNet PEAK Video Management Software (VMS)
- Scalable from one to hundreds of recorders
- Support for HD video and megapixel cameras
- Support for third-party network cameras
- Record up to 95 cameras\* on a single NVR
- Windows operating system for enhanced security and reliability
- M-JPEG, MPEG-4 and H.264 compression
- High-capacity internal storage (NVRs)
- Multi-language application
- Advanced video authentication
- Integration with third-party management software using software development kit (SDK)
- External RAID 5 Storage Area Network capability (NVRs)

The ViconNet® NVR is a high-capacity, Network Video Recorder that enables you to simultaneously capture, view and store high-quality, high resolution voice, video and data for a comprehensive security solution. The ViconNet Workstation is essentially the same machine without recording capability. It is intended for use as a remote operator workstation. The NVR and workstation help security organizations reduce system ownership costs, streamline operations and deliver more effective security.

### Built for Reliability, Usability, and Low Cost of Ownership

Proven in daily operation in thousands of customer installations worldwide, Vicon® NVRs and workstations feature an operating system designed for enhanced security and superior reliability. The ViconNet software that powers the systems, provides an open platform that allows integration with IP cameras, including megapixel cameras, encoders and IP edge devices from numerous, industry-leading manufacturers.

#### **Powerful VMS Software**

ViconNet PEAK Video Management System software provides outstanding functionality and an intuitive interface for administrators, security managers and system operators anywhere on the network. Multi-site users, in particular, benefit from the efficiency of enterprise management options.

#### Scalability

The NVRs provide scalable, internal storage for medium and large-scale installations. The system is designed to scale to thousands of cameras with additional NVRs, workstations, Kollector® DVRs or any of the ViconNet VMS products. The NVRs are available in both desktop and rack-mount configuration\*. Both the desktop and the rack-mount units are available without any internal storage drives and configured for external SAN-RAID storage using an iSCSI network connection. As an alternative option, the NVR Shadow is available that provides internal RAID in a variety of storage sizes.

\*Depending on resolution, quality and fps settings

\*The desktop and 1U rack-mount versions support up to a certain drive size. Larger drive capacity is available, but may require a larger tower or 2U chassis. Contact your Vicon Sales representative.

# **Specifications**

#### **NVR or Workstation**

Operating System:	Microsoft® Windows® 7 Embedded*, 64 bit.
CPU:	Intel® Core™ i5 processor.
Memory:	4 GB.
DVD Drive:	Internal DVD drive not available on most units. External USB DVD can be used. Refer to Ordering Information table.
Ports:	USBs, Monitors (DVI-I and HDMI), RJ-45. If RS-232/Serial (COM) connection is required, a USB to Serial converter is needed, VRS232-USB-CD.
Operating System	
Drive:	250 GB SATA-II
NVR Storage:	Internal 0.5, 1, 2, 3, 5 or 6 TB, depending upon model.
	Note that Vicon certifies DVR and NVR drives on a continual basis, therefore capacities will change frequently.
Network Interface:	100/1000 Base T Ethernet interface on main board.
Certifications:	FCC Class A.
* If a full Windows O.S.	is required contact your Vicon Salos

\* If a full Windows O.S. is required, contact your Vicon Sales Representative.

#### Environmental

Operating	
Temperature:	32° to 104°F (0° to 40°C).
Humidity:	Up to 95% relative, non-condensing.

#### **Electrical**

Input Voltage:	105-240 ±10% VAC, 50/60 Hz.
Current:	0.66 A @ 115 VAC; 0.33 A @ 240 VAC.
Power	
Consumption:	76 W nominal.
Heat Output:	266 btu/hour.
Power Connector:	Standard 3-conductor female socket.

Note: Vicon requires the use of uninterruptible power supply systems (UPS) to prevent voltage fluctuations that can affect operation and cause damage to the equipment. Failure to comply voids the warranty.

#### **Mechanical**

Application:	Indoor.		
Mounting:	Standard desktop or 19 in. (483 mm) rack-mount, 1 RU height.		
Dimensions:	Rack-Mount: 1.75" (44.45 mm) H x 19" (483 mm) W x 16" (406 mm) D. Desktop: 6.59 in. (167.5 mm) H x 2.13 in. (44 mm) W x 6.59 in. (167.5 mm) D.		
Weight:	Rack-Mount: Approximately 18.2 lb (8.3 k Desktop: Approximately 8.1 lb (3.7 kg).		
Construction:	Steel and plastic.		


### Warranty

3 years parts and labor.

## **Dimensional Data**

6.59


#### **Rack-Mount**



Front View

1.75

## Desktop



Data Sheet Number: V225-01-02 Dated: 11/2012


Vicon Data Sheet Part Number: 8009-7225-01-02 Specifications subject to change without notice.

Vicon, Kollector, ViconNet and their logos are registered trademarks of Vicon Industries Inc. Intel and Core are trademarks or registered trademarks of Intel Corporation. Microsoft, Windows and Windows Server are registered trademarks of Microsoft Corporation. Copyright  $\odot$  2012 Vicon Industries Inc. All rights reserved.

# www.vicon-security.com

### **Controls and Connectors**

Note that mother boards are subject to change and the current rear panel may differ slightly but will be similar.

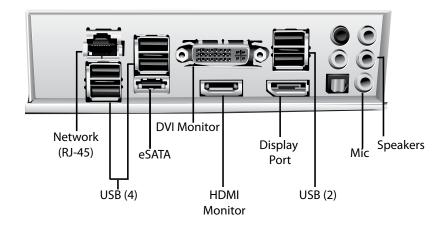

# **Ordering Information**

Model	Mounting Type	HDD Sizes (GB)	SSD	Internal DVD	Recording Capability	Model Number
Workstation	Desktop No database drives Yes	No recording capability	VN-WS-PCV6			
Preconfigured with ViconNet Software	Rack-mount	No database drive	Standard	No		VN-WS-PCV6-R1
NVR Preconfigured with ViconNet Software	Desktop	500, 1000, 2000, 3000	Standard	No	Record up to 95 cameras (depending on resolution and quality)	VN-NVR-(X)XXXV6*
	Rack-mount	500, 1000, 2000, 3000, 4000, 5000, 6000				VN-NVR-(X)XXXV6-R1*

\*(X)XXX indicates the hard drive size in GB. The (X) is not used for the 500 GB drive. For example, an NVR with 500 GB storage would have a model number of VN-NVR-500V6. The same unit with 1000 GB storage would have a model of VN-NVR-1000V6. The desktop versions support up to 3000 GB drive size and 1U rack-mount versions support up to 6000 GB drive size. Larger drive capacity is available, but may require a larger tower or 2U chassis. Contact your Vicon sales representative.

## **Options and Accessories**

	Description	Model Number
iiiin »	Control Keypad. Desk-top version, provides multi-function control for camera stations with variable-speed joystick for pan-and-tilt control and push buttons for lens function.	V1411X-DVC
	Control Keypad. Desk-top version, provides multi-function control for camera stations with three-function variable-speed joystick for pan-and-tilt control and push buttons for lens function.	V1411J-DVC
	Network Control Keypad. Used to control ViconNet digital video management systems, including Virtual Matrix Display Controller (VMDC) over an IP network or serial connection.	V1500X-SCCS-1
	External Storage Options. Vicon offers a variety of external storage options using SAN and other technologies. Refer to the web site for more information.	VN-SAN Series

# www.vicon-security.com