


5.8GHZ

RXO-5808XT

Easy to install, the RXO-5808XT is a rugged and weatherproof 5.8GHz wireless video receiver system. Simply connect a power supply, video cable, aim and shoot. Perfect for applications where trenching cable may not be possible, convenient or economical.

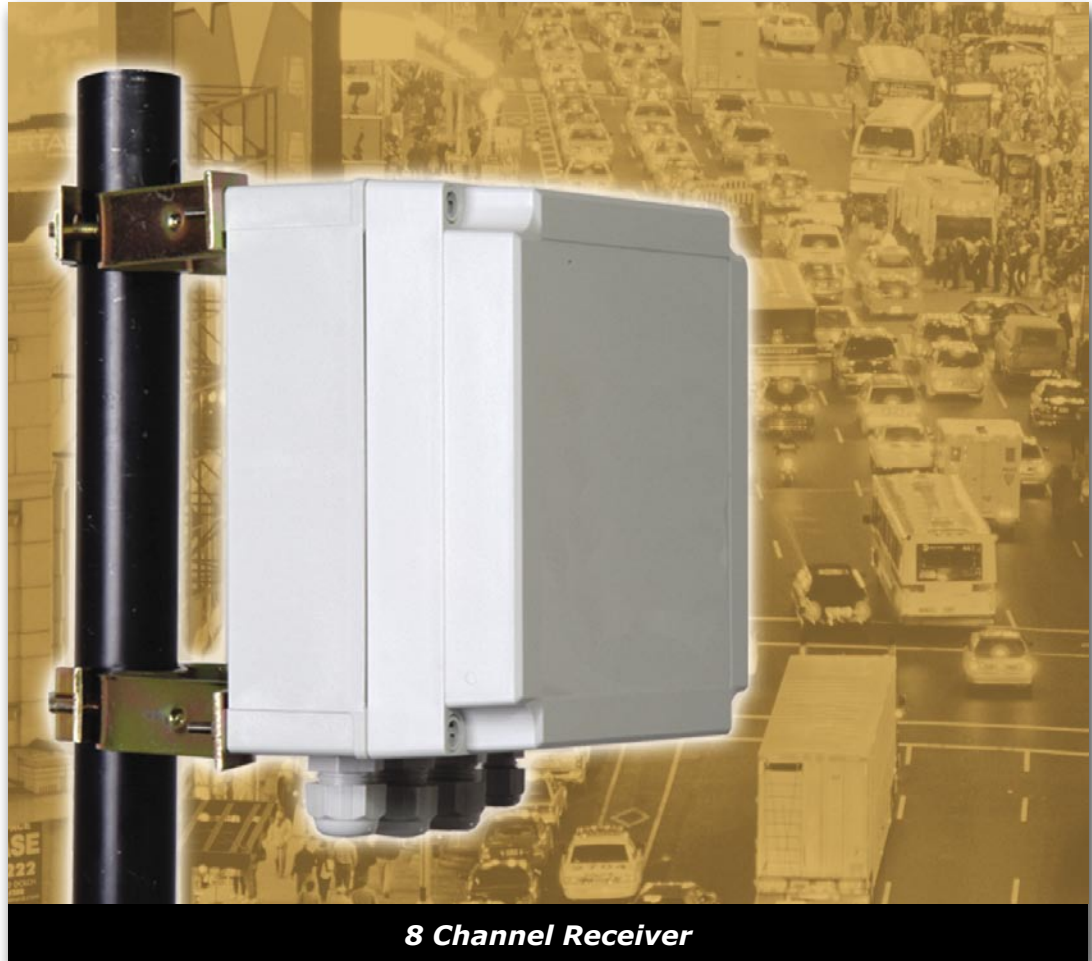

ADVANTAGES

- Easy to install and operate
- Delivers high resolution Real-Time video
- 8 user selectable channels
- Not susceptible to interference from 2.4GHz 802.11 b/g networks
- Rugged IP-67 Enclosure
- Perfect for commercial, industrial, scientific, law enforcement and government video security applications
- One Year Limited Warranty



APPLICATIONS INCLUDE

FREEWAYS

PARKING LOTS

AIRPORTS

CONSTRUCTION SITES

HARBOR

INDUSTRIAL
SPECIFICATIONS

OPERATING FREQUENCY	5.725GHz – 5.875GHz; 8 User Selectable Channels
RECEIVER SENSITIVITY	–84 dBm
RANGE (LINE-OF-SIGHT)	Depends on Optional Transmitter & Antenna
RECEIVER ANTENNA TYPE	Requires Receiver Antenna And Not included
RECEIVER SENSITIVITY	–84 dBm
VIDEO FORMAT	NTSC or PAL
VIDEO CONNECTOR	BNC Female @ 75 Ohms 1 Volt P–P
AUDIO CONNECTOR	One Left and One Right BNC Female @ 600 Ohms 1 Volt P–P
TEMPERATURE RANGE	–40°F to +170°F
POWER SUPPLY INCLUDED	9 – 14 VDC Polarity Protected
CURRENT CONSUMPTION	330 mA @ 12 VDC
DIMENSIONS	7.0" x 7.0" x 4.5"
MOUNTING BRACKETS	Included –Universal Wall / Pole Mount
WEIGHT	0.9 kg or 32 oz
FCC / IC / CE APPROVED	Yes

KIT INCLUDES

- ALL WEATHER RECEIVER
- OPERATING INSTRUCTIONS
- 12VDC POWER SUPPLY
- UNIVERSAL MOUNTING BRACKET
- ONE YEAR LIMITED WARRANTY
- **REQUIRES RECEIVER ANTENNA AND NOT INCLUDED**

