


TXO-5808XT

5.8GHZ

Designed with the harshest environments in mind, this robust transmitter delivers high resolution, Real-Time video from a rugged IP-67 all-weather enclosure. Best suited in applications where trenching cable may not be possible, convenient or economical.

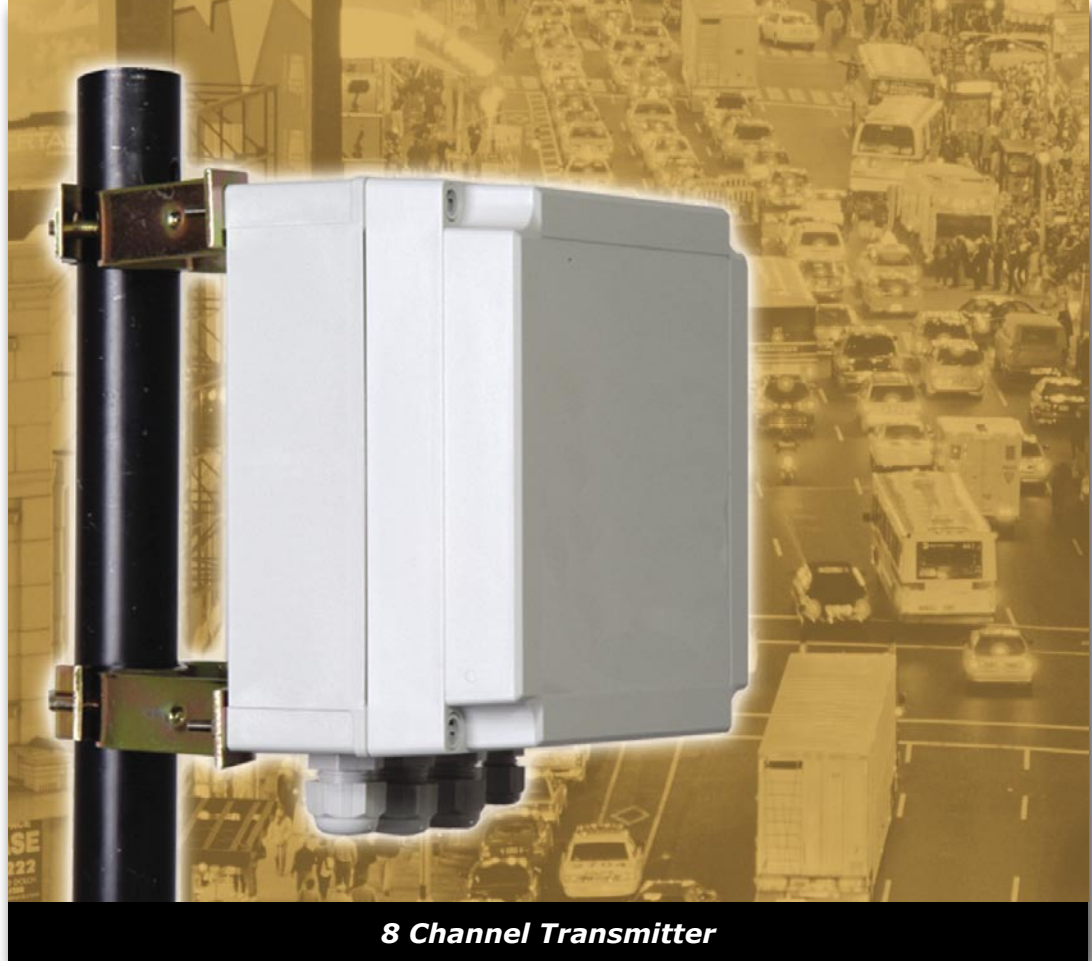

ADVANTAGES

- Easy to install and operate
- Add optional antenna to meet specific application requirements
- Delivers high resolution Real-Time video
- Not susceptible to interference from 2.4GHz 802.11 b/g networks
- 8 user selectable channels
- Choose optional receiver antenna to increase range
- Rugged all weather IP-67 protective enclosure
- Perfect for commercial, industrial, scientific, law enforcement and government video security applications



APPLICATIONS INCLUDE



FREEWAYS



PARKING LOTS



AIRPORTS



CONSTRUCTION SITES



HARBOR



INDUSTRIAL

SPECIFICATIONS

OPERATING FREQUENCY	5.725GHz – 5.875GHz; 8 User Selectable Channels
RADIATED POWER	50mV/m @ 3m
RANGE (LINE-OF-SIGHT)	Depends on Optional Receiver and Antenna
TRANSMITTER ANTENNA TYPE	Requires Transmitter Antenna and not Included
ANTENNA INPUT CONNECTOR	SMA-Female
VIDEO FORMAT	NTSC or PAL
VIDEO CONNECTOR	BNC Female @ 75 Ohms 1 Volt P-P
AUDIO CONNECTOR	One Left and One Right BNC Female @ 600 Ohms 1 Volt P-P
TEMPERATURE RANGE	-40°F to +170°F
POWER SUPPLY INCLUDED	9 – 14 VDC Polarity Protected
CURRENT CONSUMPTION	230 mA @ 12 VDC
DIMENSIONS	7.0" x 7.0" x 4.5"
MOUNTING BRACKETS	Included –Universal Wall / Pole Mount
WEIGHT	0.9 kg or 32 oz
FCC / IC / CE APPROVED	Yes

KIT INCLUDES

- ALL WEATHER TRANSMITTER
- OPERATING INSTRUCTIONS
- 12VDC POWER SUPPLY
- UNIVERSAL MOUNTING BRACKET
- ONE YEAR LIMITED WARRANTY
- **REQUIRES TRANSMITTER ANTENNA AND NOT INCLUDED**

