

# HET

## HOUSING FOR SMALL CAMERAS

REVISION 1027



### MAIN FEATURES

Indoor / Outdoor installations

Extruded aluminium body

Sliding removable body with hinged system

Wide range of accessories available

Weatherproof Standard IP66/IP67

### DESCRIPTION

The dimensions of this housing make it suitable for small cameras (1/3" and 1/4") with fixed lenses.

Constructed from extruded and die-cast aluminium. Its weatherproof feature is ensured by EPDM-rubber gaskets and 2 cable glands.


A wide range of accessories is available: sunshield, heater kit and camera power supply in weatherproof box.



HET + WBCAA

### AVAILABLE MODELS

Code	Sunshield	Heater 115/230Vac	Heater 12Vdc/24Vac	WBCAA bracket	Max consumption
HET16D0A000					
HET16K0A000	•				
HET16K0A071	•			•	
HET16K1A000	•	•			40W
HET16K1A071	•	•		•	40W
HET16K2A000	•		•		20W
HET16K2A071	•		•	•	20W
HET22D0A000					
HET22K0A000	•				
HET22K1A000	•	•			40W
HET22K2A000	•		•		20W

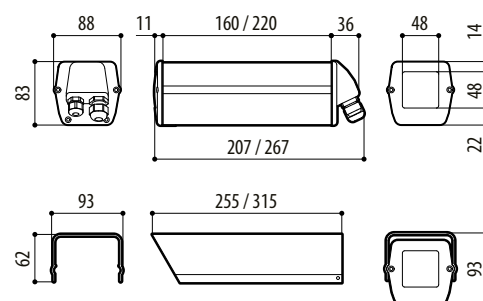

HET

mm 1:10

## TECHNICAL DATA

## GENERAL

Aluminium back and front cover plates  
 Extruded aluminium body and external slide  
 Epoxypolyester powder painting, RAL9002 colour  
 Stainless steel external screws  
 Supplied with instruction manual, desiccant bag, accessories for camera and lens mounting

## MECHANICAL

Cable glands: 1 PG9 + 1 PG11  
 Glass window (WxH): 47.5x47.5mm (1.9x1.9in)  
 Internal usable area (WxH): 62x55mm (2.4x2.2in)  
 Internal usable length without accessories  
 HET16 160mm (6.3in)  
 HET22 220mm (8.7in)  
 Internal usable length with heater  
 HET16 95mm (3.7in)  
 HET22 140mm (5.5in)

## ELECTRICAL

Heater Ton  $15^{\circ}\text{C} \pm 3^{\circ}\text{C}$  ( $59^{\circ}\text{F} \pm 5^{\circ}\text{F}$ ) Toff  $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$  ( $71^{\circ}\text{F} \pm 5^{\circ}\text{F}$ )  
 • IN 12Vdc/24Vac, consumption 20W max  
 • IN 115/230Vac, consumption 40W max

## ENVIRONMENT

Indoor / Outdoor  
 Operating temperature with heater:  $-20^{\circ}\text{C}$  /  $+60^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  /  $+140^{\circ}\text{F}$ )  
 Resistant to salty fog until 1000 hours (according to ISO9227)

## CERTIFICATIONS

CE EN61000-6-3, EN60065, EN50130-4  
 IP66/IP67 EN60529

## ACCESSORIES

OHETS16A000 Sunshield for HET16  
 OHETS22A000 Sunshield for HET22  
 OHEH01B Heater 12Vdc/24Vac  
 OHEH02B Heater 115/230Vac  
 OHEGBPS1B Wide range camera power supply IN 100-240Vac - OUT 12Vdc in weatherproof box, 1A  
 OHEGBPS2B Camera power supply IN 230Vac - OUT 24Vac in weatherproof box, 400mA  
 OHEGBB Weatherproof junction box IP55

## BRACKETS AND ADAPTORS

WBCAA Aluminium wall/ceiling camera bracket (only HET16)  
 WBMA Wall bracket with ball joint (only HET22)  
 WCM3A Ceiling bracket with ball joint (only HET22)  
 WCM5A Ceiling bracket with ball joint (only HET22)  
 WFWCA Column mount with ball joint (only HET22)

## RELATED PRODUCTS

PTH300 Pan&Tilt series

## SPARE PARTS

DOTHE02 Spacers for camera and lens  
 OHETMAN Cable glands, gaskets and screws kit  
 OHETFA04 Front cover with screws and gaskets  
 OHETFP04 Back cover with cable glands screws and gaskets

## PACKAGE

Code	Unit weight		Package weight		Package dimensions (WxHxL)		Master carton
	kg	lb	kg	lb	cm	in	
HET16K1	1.1	2.4	1.4	3.1	13.0x17.0x35.0	5.1x6.7x13.8	16
HET16K1A071	1.3	2.9	1.6	3.5	13.0x17.0x35.0	5.1x6.7x13.8	16
HET22K1	1.4	3.1	1.6	3.5	13.0x17.0x35.0	5.1x6.7x13.8	16