

MAXIMUS MHXT

EX-PROOF HOUSING FOR THERMAL CAMERAS



MAIN FEATURES

Made of AISI 316L electropolished stainless steel
 Germanium window with protection grid
 Integrated telemetry receiver
 2 ¾" NPT threaded holes for use of cable glands or conduit
 Sunshield and heater included
 Environment temperature: -40°C / +60°C (-40°F / +140°F)
 Power supply: 230Vac, 24Vac or 120Vac

DESCRIPTION

These explosion-proof housings of MAXIMUS range have been certified and designed to meet the strictest standards regarding installation in potentially explosive environments, given the presence of gas and flammable dusts. The MAXIMUS range ensures excellent performance for monitoring critical processes in areas with risk of explosion, such as refineries, gas pipelines, oil tankers, offshore platforms, industrial processes, chemical industries, etc. Equipped with heating, the housing has the same installation and operating temperatures, comprised between -40° C and + 60° (-40°F / +140°F). The wiring is made easier thanks to the removable connectors on the circuit board. The housing can eventually be controlled by VMS through a video encoder with RS485 serial port.



MHXT



MHXT-MHXWBS1



TECHNICAL DATA**GENERAL**

AISI 316L stainless steel construction
 Passivated and electropolished external surfaces
 Silicone O-ring seals

MECHANICAL

2 3/4" NPT holes for cable entry
 Window with protection grid
 Sunshield
 Unit weight: 16.5kg (36lb)

HOUSING WINDOW

Material: Germanium
 Dimensions:
 • Diameter: 56mm (2.2in)
 • Thick: 10mm (0.4in)
 External treatment: Antiscratch (Hard Carbon Coating, DLC)
 Internal treatment: Antireflection
 Spectral range: From 7.5µm up to 14µm

ELECTRICAL

Power supply/Current consumption:
 • 230Vac, 0.34A, 50/60Hz
 • 120Vac, 0.5A, 50/60Hz
 • 24Vac, 2.2A, 50/60Hz
 Power absorbed by heating (Ton 10°C±4°C (50°F±7°F), Toff 22°C±3°C (77°F±5°F)):
 • 230Vac: 60W max
 • 120Vac: 40W max
 • 24Vac: 30W max

COMMUNICATIONS

Serial interface: 1 RS-485 line, half-duplex

CAMERA

Compatible cameras:
 • Power consumption (assembly, camera and lens): 13W max
 • Cameras dimensions/Lenses that can be installed (WxHxL): 80x82x245mm (3.1x3.2x9.6in) max
 • Minimum distance between camera and housing's window: 10mm (0.4in)

ENVIRONMENT

Indoor/Outdoor
 Operating temperature/Installation temperature: from -40°C (-40°F) up to +60°C (140°F)
 Operating temperature/Installation temperature (MHXT2...A-U, in 24Vac and with pre-installed camera by Videotec): from -40°C (-40°F) up to +54°C (129°F)

CERTIFICATIONS

ATEX (EN 60079-0: 2012, EN 60079-1: 2007, EN 60079-31: 2009):
 Ⓜ II 2 G Ex d IIC T6 Gb Ta -40°C to +60°C
 Ⓜ II 2 D Ex tb IIIC T85°C Db Ta -40°C to +60°C
 IECEX (IEC 60079-0: 2011 Ed.6, IEC 60079-1: 2007-04 Ed.6, IEC 60079-31: 2008 Ed.1):
 Ex d IIC T6 Gb Ta -40°C to +60°C
 Ex tb IIIC T85°C Db Ta -40°C to +60°C
 IP66/IP67 (EN60529:1991/A1 2001)
 INMETRO (ABNT NBR IEC 60079-0:2008 + Errata 1:2011, ABNT NBR IEC 60079-1:2009 + Errata 1:2011, ABNT NBR IEC60079-31:2011):
 Ex d IIC T6 Gb -40°C à/to +60°C
 Ex tb IIIC T85°C Db -40°C à/to +60°C
 IP66/IP67
 cULus Listed, TYPE 4X (only versions MHX2...A-U, in 24Vac with pre-installed camera by Videotec)
 UL listed for USA (only versions MHX2...A-U, in 24Vac with pre-installed camera by Videotec):
 Class I, Zone 1, AEx d IIC T6
 Zone 21, AEx tb IIIC T85°C
 UL listed for Canada (only versions MHX2...A-U, in 24Vac with pre-installed camera by Videotec):
 Ex d IIC T6 Gb
 Class II, Groups E, F and G
 EAC EX:
 Ex d IIC T6 Gb
 Ex tb IIIC T85 Db

ACCESSORIES

OCTEX3/4C	Cable gland with gasket EX 3/4" NPT, unarmoured cable IECEX-ATEX-EAC Ex
OCTEXA3/4C	Cable gland with gasket EX 3/4" NPT, armoured cable IECEX-ATEX-EAC Ex
OCTEXB3/4C	Barrier cable gland 3/4" NPT, unarmoured cable IECEX-ATEX-EAC Ex
OCTEXBA3/4C	Barrier cable gland 3/4" NPT, armoured cable IECEX-ATEX-EAC Ex
OCTEX3/4	Cable gland with gasket EX 3/4" NPT, unarmoured cable ATEX
OCTEXA3/4	Cable gland with gasket EX 3/4" NPT, armoured cable ATEX
OCTEXB1/2C	Barrier cable gland EX 1/2" NPT unarmoured cable ATEX-IECEX-EAC Ex
OCTEX1/2C	Cable gland with gasket EX 1/2" NPT unarmoured cable ATEX-IECEX-EAC Ex, with gasket from 3 to 8mm (0.12 to 0.31in)
OCTEXS1/2C	Cable gland with gasket EX 1/2" NPT unarmoured cable ATEX-IECEX-EAC Ex, with gasket from 7.5 to 11.9mm (3 to 4.7in)
OCTEX1/2-3/4C	Cable glands reduction in nickel-plated brass 3/4" - 1/2" NPT IECEX-ATEX-EAC Ex
OEXPLUG3/4	Plug EX 3/4" NPT IECEX-ATEX-EAC Ex
USB485	USB-RS485 converter

BRACKETS AND ADAPTORS

MHXWBS	AISI 316L stainless steel wall bracket
MPXCW	AISI 316L stainless steel corner adapter module
MPXCOL	AISI 316L stainless steel pole adapter module
MHXWFWCA	AISI316L stainless steel ball joint
NXFWBT	AISI 316L stainless steel parapet mounting bracket

PACKAGE

Model Number	Weight	Dimensions (WxHxL)	Master carton
MHXT	19kg (42lb)	58x34x22cm (23x13.4x8.7in)-	

AVAILABLE MODELS						
Model Number	230Vac	24Vac	120Vac	Germanium window for thermal cameras	Sunshield	ATEX / IECEX / EAC EX / INMETRO
MHXT1C000B	✓	-	-	✓	✓	✓
MHXT2C000B	-	✓	-	✓	✓	✓
MHXT3C000B	-	-	✓	✓	✓	✓

MAXIMUS MHXT CERTIFICATIONS AND MARKINGS		
Certification	Markings	Product Nr. Ending
ATEX	Ex II 2 G Ex d IIC T6 Gb Ta -40°C to +60°C, Ex II 2 D Ex tb IIIC T85°C Db Ta -40°C to +60°C	...B
IECEX	Ex d IIC T6 Gb Ta -40°C to +60°C, Ex tb IIIC T85°C Db Ta -40°C to +60°C	...B
EAC Ex	Ex d IIC T6 Gb, Ex tb IIIC T85 Db	...B
INMETRO	Ex d IIC T6 Gb -40°C à/to +60°C, Ex tb IIIC T85°C Db -40°C à/to +60°C	...B
UL listed for USA (only 24Vac)	Class I, Zone 1, AEx d IIC T6, Zone 21, AEx tb IIIC T85°C	...B-U ¹
UL listed for Canada (only 24Vac)	Class I, Zone 1, Ex d IIC T6 Gb, Class II, Groups E, F and G	...B-U ¹

¹ UL Certifications only for 24Vac versions and with pre-installed camera by Videotec. Operating temperature -40°C / +54°C (-40°F / 122°F)


3/4" NPT CABLE GLAND SELECTION GUIDE							
Zone, Gas	Cable gland type	Certification	Operating temperature	Cable	Cable glands part code	Diameter of the external cable (mm)	Under armor cable diameter (mm)
IIC, Zone 1 or Zone 2 IIB or IIA, Zone 1	Barrier	IECEX/ATEX/EAC	-60°C / +80°C (-76°F / +176°F)	Not armoured	OCTEXB3/4C	13 - 20.2	-
				Armored	OCTEXBA3/4C	16.9 - 26	-
IIB or IIA, Zone 2	With gasket	IECEX/ATEX/EAC	-60°C / +100°C (-76°F / +212°F)	Not armoured	OCTEX3/4C	13 - 20.2	-
				Armored	OCTEXA3/4C	16.9 - 26	11.1 - 19.7
		ATEX	-20°C / +80°C (-4°F / +176°F)	Not armoured	OCTEX3/4	14 - 17	-
				Armored	OCTEXA3/4	18 - 23	14 - 17

1/2" NPT CABLE GLAND SELECTION GUIDE						
Zone, Gas	Cable gland type	Certification	Operating temperature	Cable	Cable glands part code	Diameter of the external cable (mm)
IIC, Zone 1 or Zone 2 IIB or IIA, Zone 1	Barrier	IECEX/ATEX/EAC	-60°C / +80°C (-76°F / +176°F)	Not armoured	OCTEXB1/2C	3 - 8
				Not armoured	OCTEX1/2C	3 - 8
IIB or IIA, Zone 2	With gasket	IECEX/ATEX/EAC	-60°C / +100°C (-76°F / +212°F)	Not armoured	OCTEXS1/2C	7.5 - 11.9
				Not armoured	OCTEXS1/2C	7.5 - 11.9

For a correct installation of the MHX/MHXT housing, cable entries and field wiring must be suitable for an operating temperature of at least +30°C above ambient.

TECHNICAL DRAWINGS

Sizes in millimeters.

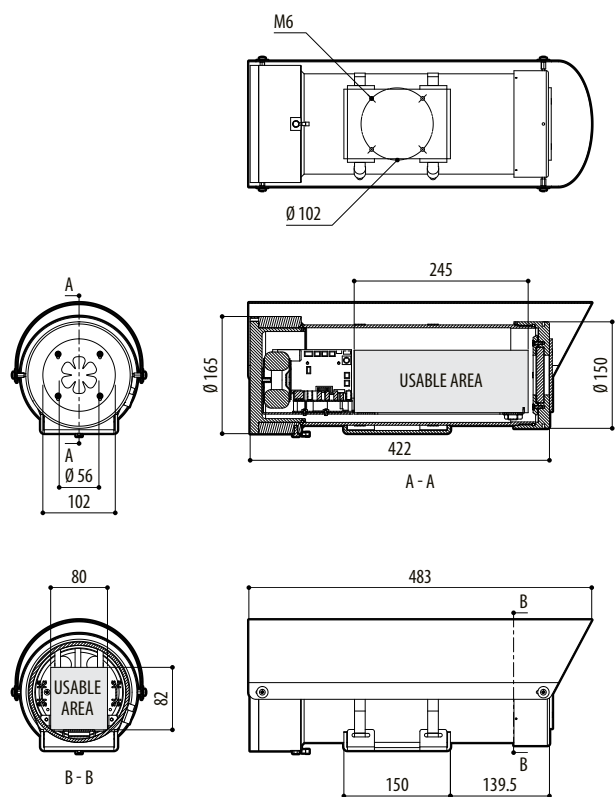

MAXIMUS MHXT