

# MAIN FEATURES

Large housing

AISI 304 stainless steel construction

Optional wiper and washer

Weatherproof standard IP54




The NXJ housing, entirely constructed from AISI 304 electropolished stainless steel, has been designed to accommodate large cameras and zoom lenses.

The NXJ housing has a frontal section of 180x170mm and is 500mm in length. It consists of a base with internal slide and a body closed by means of three fastening clips.


The large window on the front makes it suitable for various zoom lenses. It is equipped with 2 PG16 cable glands for the connections and is pre-arranged for the bracket mounting and the wiper installation.

A wide range of accessories is available: heater, blower kit, camera power supply, stainless steel special brackets and possibility to mount the wiper and washer.



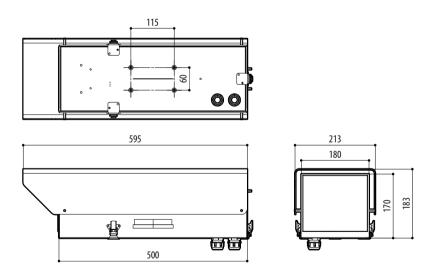

NXJ



VIPNX

mm 1:10

AVAILABLE MODELS								
Code	Sunshield	Heater 115/230Vac	Heater 12Vdc/24Vac	Max consumption				
NXJ1A000	•	•		40W				
NXJ2A000	•		•	20W				

## TECHNICAL DATA

## **GENERAL**

Built-in electropolished stainless steel AISI 304

Epoxypolyester powder painting, RAL9002 colour

Opening / closing by means of three hinges

Supplied with instruction manual and installation kit

## MECHANICAL

2 cable glands 2xPG16

Glass window (WxH): 160x130mm (6.3x5.1in)

External dimensions (WxHxL): 180x170x500mm (7x6.6x19.6in)

Internal usable dimensions (WxH): 175x125mm (6.9x4.9in)

Internal usable length: 490mm (19.3in)

## WIPER

Wiper blade and enclosure constructed from AISI 316 stainless steel Dimensions (ØxL): 100x169mm (3.9x6.6in), not comprehensive of blade

Connector 3+1 pins

IN 230Vac, consumption 7W max

IN 24Vac, consumption 7W max

## **ELECTRICAL**

Heater Ton 15°C±3°C (59°F±5°F) Toff 22°C±3°C (71°F±5°F)

- IN 12Vdc/24Vac, consumption 20W max
- IN 115/230Vac, consumption 40W max

Blower kit with thermostat air filter, Ton 35°C±3°C (95°F±5°F) Toff 20°C±3°C (71°F±5°F)

- IN 12Vdc, consumption 4W max
- IN 24Vac, consumption 4W max
- IN 230Vac, consumption 4W max

#### Camera power supply

- IN 230Vac OUT 12Vdc, 50/60Hz, 400mA
- IN 230Vac OUT 24Vac, 50/60Hz, 400mA

# **ENVIRONMENT**

Indoor / Outdoor

Operating temperature:  $-20^{\circ}\text{C} / +60^{\circ}\text{C} (-4^{\circ}\text{F} / +140^{\circ}\text{F})$ 

Salty fog resistance

## CERTIFICATIONS

NXJ	
CE EN61000-6-3, EN60065, EN50130-4	
IP54 EN60529	
VIPNXJ	
CE EN61000-6-3, EN60065, EN50130-4	

ACCESSORIES	
ONXJVF1	Blower kit with thermostat air filter IN 12Vdc
ONXJVF2	Blower kit with thermostat air filter IN 24Vac
ONXJVF3	Blower kit with thermostat air filter IN 230Vac
OHEPS24	Camera power supply IN 230Vac - OUT 12Vdc, 400mA
OHEPS25	Camera power supply IN 230Vac - OUT 24Vac, 400mA
VIPNXJ1C	Stainless steel wiper 230Vac
VIPNXJ2C	Stainless steel wiper 24Vac
VIP5WAS01	Tank 5I (1,3gal), 230Vac washer pump
VIP5WAS02	Tank 5I (1,3gal), 24Vac washer pump
VIP23WAS01	Tank 23I (6gal), 230Vac washer pump
VIP23WAS02	Tank 23I (6gal), 24Vac washer pump
VIP23WASA01	Tank 23I (6gal), 230Vac washer pump, high delivery up 30m (98ft)
UPTWAS01C	Tank 23I (6gal), IN 230Vac washer pump (prearranged for DTWRX board)
UPTWAS02C	Tank 23I (6gal), IN 24Vac washer pump (prearranged for DTWRX board)
UPTWAS03C	Tank 23I (6gal), IN 120Vac washer pump (prearranged for DTWRX board)
UPTWASA01C	Tank 23l (6gal), IN 230Vac washer pump, high delivery up 30m (98ft) (prearranged for DTWRX board)
UPTWASA03C	Tank 23l (6gal), IN 120Vac washer pump, high delivery up 30m (98ft) (prearranged for DTWRX board)
DTWRX	Optional board for remote control of wiper and washer pump of the UPTWAS series
OPTH200ADJB	Adapter kit for installation on NXPTH P&T
OMARPTH	Adapter kit for installation on PTH900 P&T

## **BRACKETS AND ADAPTORS**

NXWBS1 Wall bracket for stainless steel housing

## **RELATED PRODUCTS**

NXPTH Stainless steel Pan&Tilt PTH900 Aluminium Pan&Tilt

#### **SPARE PARTS**

IP66 EN60529

OSPAVIPNXJ Complete wiper blade for VIPNXJ

PACKAGE									
Code	Unit weight		Package weight		Package dimensions (WxHxL)		Master carton		
	kg	lb	kg	lb	cm	in	unit		
NXJ	9.6	21.2	10.2	22.5	24.5x24.5x62.0	9.7x9.7x24.1	-		
VIPNXJ	1.5	3.3	1.7	3.7	14.5x15.0x27.0	5.7x5.9x10.6	-		