

# SR4C

## 4 INPUTS DVR

REVISION 0945



### MAIN FEATURES

- 4 video inputs
- 1 monitor output
- 4 alarm inputs with possibility of NC or NO configuration
- Image display in quad or single format
- Optional hard disk
- Possibility of selecting PAL/NTSC


### DESCRIPTION

A solution for small applications with the possibility of displaying four cameras simultaneously on a single monitor or one camera on full-screen.

The DVR records either the quad or full-screen signal.



SM42B

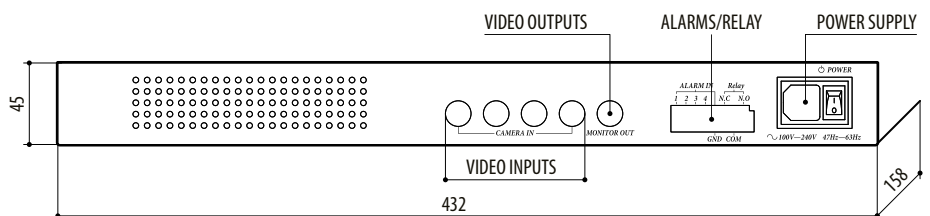

SR4C

mm 1:4

**TECHNICAL DATA****GENERAL**

Max 4 cameras
1 monitor output
Possibility of switching each input video to output channel
Possibility of displaying video inputs in quad format
Possibility of installing a hard disk for storing recordings: 2IDE (max 400GB each)
Configuration through OSD
Password for protecting setup menu
Input titling and display of date and time
Possibility of modifying date and time format
Motion Detection can be programmed for each channel
Videoloss for each input
Channel adjustment: for each channel it is possible to adjust contrast, brightness, tone and colour
2 Recording modes <ul style="list-style-type: none"> <li>• QUAD format with the screen divided into 4 shots</li> <li>• MUX full-screen format for each input</li> </ul>
Setup for recording in time bands
Event log
Supplied with instruction manual, pair of adapters for rack assembly, power supply cable

**MECHANICAL**

Steel box
Epoxy polyester powder painting, grey colour
Keyboard on front panel
Dimensions: 432x280x44mm (17x11x1.7in)
ON/OFF switch
4 BNC connectors for video inputs
1 BNC connector for video output
Alarm connector, relays

**ELECTRICAL**

Power supply 90-260Vac, 56-60Hz
Consumption 50W max
4 inputs 75 Ohm 1 Vpp
1 output 75 Ohm 1 Vpp
4 alarm inputs (can be configured N.O./ N.C.)
Output contacts: 1 N.O. and 1 N.C.
Max voltage applicable to relay 50V, 1A
PAL or NTSC type signal can be selected
Recording format M-Jpeg
Recording speed: 1x, 4x, 8x, 16x
Display resolution <ul style="list-style-type: none"> <li>• PAL 750x256 max</li> <li>• NTSC 720x480 max</li> </ul>
Recording resolution <ul style="list-style-type: none"> <li>• PAL 640x576 max</li> <li>• NTSC 640x224 max</li> </ul>
Display <ul style="list-style-type: none"> <li>• PAL 25fps</li> <li>• NTSC 30fps</li> </ul>
Selectable recording resolution in case of alarm (number of frames per second)
Selectable recorded image quality (degree of image compression)

**ENVIRONMENT**

Indoor
Operating temperature: 0°C / +40°C (+32°F / +107°F)

**CERTIFICATIONS**

CE EN61000-6-3, EN60065, EN50130-4
------------------------------------

**PACKAGE**

Code	Unit weight		Package weight		Package dimensions (WxHxL)		Master carton unit
	kg	lb	kg	lb	cm	in	
SR4C	4.0	8.8	5.0	11.0	43.2x4.4x28.0	17.0x1.7x11.0	-