

# SW41SK-SW81SK

## LOW COST SEQUENTIAL SWITCHERS

REVISION 0945



### MAIN FEATURES

4/8 video inputs - 1 video output

Adjustable switching time

Skip function

### DESCRIPTION

SW41SK and SW81SK units are sequential switchers, constructed from sturdy aluminium, equipped respectively with 4 and 8 video inputs and 1 video output. The selection of the video input can be performed manually or in automatic switching.

In automatic mode, the switching time can be adjusted by means of a potentiometer (from 0.5 to 30 seconds).



The active video input and the automatic mode are signalled by red LEDs built-in on the push-buttons.



SW41SK



SW81SK

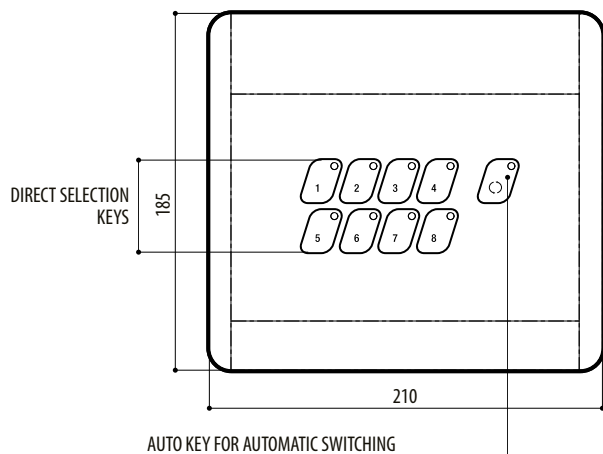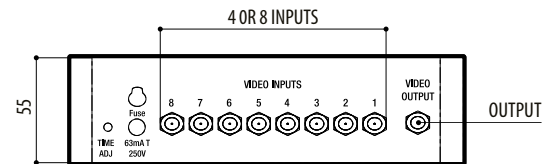

SW81SK

mm 1:4

**SW41SK-SW81SK****TECHNICAL DATA****GENERAL**

Max 4-8 cameras  
 Ability to switch each video input to the output channel  
 Ability to display on the outlet channel a switching cycle of the connected video inputs  
 Switching time adjustable by the operator (from 0.5 up to 30 seconds)  
 Supplied with instruction manual

**MECHANICAL**

constructed from aluminium  
 Epoxypolyester powder painting, grey colour  
 Local keyboard in polycarbonate  
 Dimensions: 230x190x50mm (9x7.4x1.9in)  
 Power supply jack connector  
 Potentiometer TIME  
 1 BNC video output  
 4/8 BNC video inputs

**ELECTRICAL**

4/8 inputs, 750hms 1 Vpp  
 1 output 750hms 1 Vpp  
 Band width: >6MHz  
 Cross-talk: -50dB  
 Power supply: 230Vac, 50/60Hz  
 Power consumption: 4W  
 Fuse: 50 mA 250V

**ENVIRONMENT**

Indoor  
 Operating temperature: 0° C / +45° C (+32° F / +113° F)

**CERTIFICATIONS**

CE EN61000-6-3, EN60065, EN50130-4

**PACKAGE**

Code	Unit weight		Package weight		Package dimensions (WxHxL)		Master carton
	kg	lb	kg	lb	cm	in	unit
SW14SK	1.1	2.4	1.3	2.9	25.0x6.5x25.0	9.8x2.5x9.8	20
SW81SK	1.1	2.4	1.3	2.9	25.0x6.5x25.0	9.8x2.5x9.8	20