

AW-FET-160A-250

Unmanaged PoE Switch


16xFE PoE Switch



Technical Specifications

Model	AW-FET-160A-250	Transmission Media	
IP Camera Compatibility		10Base T	Cat. 3, 4, 5 UTP/STP
Video Resolution	Megapixel/D1/VGA	100Base TX	Cat. 5, 5e UTP/STP
Video Compression	MJPEG/MPEG-4/H.264	PoE Function	
Ethernet		Number of PoE Out Ports	16
Fast Ethernet 10/100Mps	16	Max. PoE Output Power/per Port	30W
Standards		Total PoE Power Budget	240W
IEEE 802.3 10-BASE-T (Ethernet)	Supported	802.3at/af Standard Compatible	Yes
IEEE 802.3u 100-BASE-TX (Fast Ethernet)	Supported	Over Current Protection	Supported
IEEE 802.3x Flow Control (Full-Duplex Flow Control)	Supported	Circuit Shorting Protection	Supported
IEEE 802.3af Power over Ethernet	Supported	Power Pin Assignment	1/2(+), 3/6(-)
IEEE 802.3at Power over Ethernet Plus	Supported	PoE PD Auto Detection	Yes
Ethernet Performance		General	
MAC Address	4 K	LED Indicators	Power, LAN port x16, PoE port x16
Buffer Memory	160 KB	Power Input	100~240V AC / 50~60Hz
Transmission Method	Store and Forward	Power Consumption	250W
Backplane	3.2 Gbps	Dimensions	440 (L) x 200 (W) x 44 (H) mm
Auto-MDI/MDI-X, Auto-Negotiation	Supported	Weight	2.85 kg
Filtering/Forwarding Rates		Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
10Mps	14,880 pps	Storage Temperature	-20°C ~ 70°C (-4°F ~ 158°F)
100Mbps	148,000 pps	Humidity	Operating: 10~90% (Non-condensing) Storage: 10~90% (Non-condensing)
		Safety Certifications	CE, C-Tick, FCC, LVD, VCCI
		Accessory	
		Included Accessories	Power cord, QIG, 19" rack mount kit

Dimensions

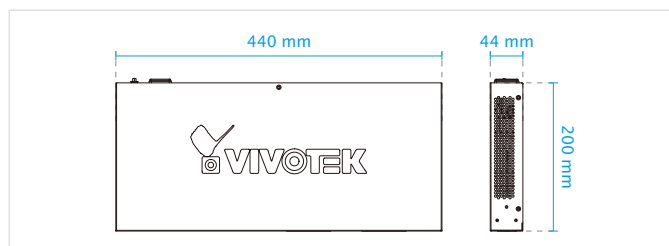

Part No.

Part No.	Item
909006100G	AW-FET-160A-250, US
909006110G	AW-FET-160A-250, AU
909006120Z	AW-FET-160A-250, EU
909006130Z	AW-FET-160A-250, UK
909006140G	AW-FET-160A-250, JP

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver 1.3