



V series **FD9189-H**
V series **FD9189-HM**
V series **FD9189-HT**

Fixed Dome Network Camera



5MP 30 fps • 2MP 60 fps • H.265 • 30M IR • WDR Pro • SNV • Smart Stream III

VIVOTEK's FD9189 series is a H.265 indoor dome network camera equipped with a 5-Megapixel sensor, enabling resolution of 2560 x1920 at 30 fps. Featuring VIVOTEK SNV and WDR Pro technology, the FD9189 series is capable of capturing high-quality imagery in both high-contrast and low-light environments.

The FD9189 series offers various lens options for different user scenarios: fixed focus, manual focus, and remote focus lenses. The camera is equipped with IR illuminators with a 30-meter effective range for better night visibility.

The FD9189 series comes with VIVOTEK's Smart Stream III technology and H.265 codec support. It is capable of reducing bandwidth consumption to 90%* while maintaining supreme image quality. Additionally, VIVOTEK's VADP (VIVOTEK Application Development Platform) allows users to customize applications for the ever-expanding number of user scenarios in the diversified surveillance market.

* Depending on scenes


Key Features

- 30 fps @ 2560x1920, 60 fps @ 1920x1080 (WDR Pro on)
- H.265 Compression Technology
- Smart Stream III to Optimize Bandwidth Efficiency
- WDR Pro (120 dB) for Unparalleled Visibility in Extremely Bright and Dark Environments
- SNV (Supreme Night Visibility) for Low Light Conditions
- Built-in IR Illuminators, effective up to 30 Meters
- Smart IR Technology to Avoid Overexposure
- Trend Micro IoT Security within Standard Warranty Period
- Built-in MicroSD/SDHC/SDXC Card Slot for On-board Storage



Without WDR Pro

With WDR Pro

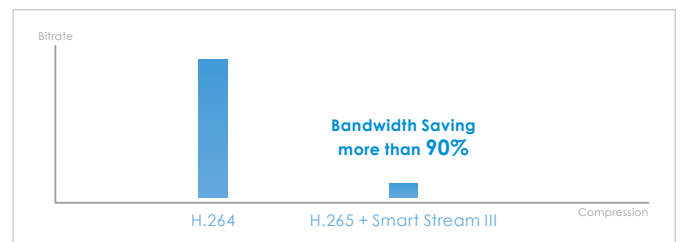

H.265 + Smart Stream III, Ultra-low Bandwidth

Technical Specifications

Model	FD9189-H FD9189-HM FD9189-HT	On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording
System Information		Video	
CPU	Multimedia SoC (System-on-Chip)	Compression	H.265, H.264, MJPEG
Flash	128MB	Maximum Frame Rate	30 fps @ 2560x1920 60 fps @ 1920x1080
RAM	512MB	Maximum Streams	3 simultaneous streams
Camera Features		S/N Ratio	FD9189-H: 54 dB FD9189-HM: 51 dB FD9189-HT: 55 dB
Image Sensor	1/2.7" Progressive CMOS	Dynamic Range	120 dB
Max. Resolution	2560x1920 (5MP)	Video Streaming	Adjustable resolution, quality and bitrate, Smart Stream III
Lens Type	FD9189-H: Fixed-focal FD9189-HM: Vari-focal, Manual Focus FD9189-HT: Motorized, Vari-focal, Remote Focus	Image Settings	Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks; Scheduled profile settings, HLC, defog, 3DNR, DIS, video rotation
Focal Length	FD9189-H: f = 2.8 mm FD9189-HM: f = 2.8 ~ 12 mm FD9189-HT: f = 3.7 ~ 7.7 mm	Audio	
Aperture	FD9189-H: F2.0 FD9189-HM: F1.85 ~ F2.9 FD9189-HT: F1.9 ~ F2.9	Audio Capability	One-way Audio
Iris type	FD9189-H/HT: Fixed-iris FD9189-HM: DC-iris	Compression	G.711, G.726
Field of View	FD9189-H: 103° (Horizontal) 76° (Vertical) 134° (Diagonal) FD9189-HM: 30° ~ 100° (Horizontal) 23° ~ 72° (Vertical) 38° ~ 135° (Diagonal) FD9189-HT: 38° ~ 80° (Horizontal) 29° ~ 60° (Vertical) 48° ~ 101° (Diagonal)	Interface	Built-in microphone
Shutter Time	1/5 sec. to 1/32,000 sec.	Effective Range	5 meters
WDR Technology	WDR Pro	Network	
Day/Night	Yes	Users	Live viewing for up to 10 clients
Removable IR-cut filter	Yes	Protocols	802.1X, ARP, CIFS/SMB, CoS, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTSP/RTP/RTCP, SMTP, SNMP, SSL, TCP/IP, TLS, UDP, UPnP
IR Illuminators	Built-in IR illuminators, effective up to 30 meters with Smart IR, IR LED*4	Interface	10 Base-T/100 Base-TX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
Minimum Illumination	FD9189-H: 0.06 Lux @ F2.0 (Color) 0.01 Lux @ F2.0 (B/W) 0 Lux with IR illumination on FD9189-HM: 0.06 Lux @ F1.85 (Color) 0.01 Lux @ F1.85 (B/W) 0 Lux with IR illumination on FD9189-HT: 0.06 Lux @ F1.9 (Color) 0.01 Lux @ F1.9 (B/W) 0 Lux with IR illumination on	ONVIF	Supported, specification available at www.onvif.org
Pan Range	353°	Intelligent Video	
Tilt Range	80°	Smart Motion Detection	FD9189-H/HT: Five-window video motion detection, people detection, time filter
Rotation Range	350°	Video Motion Detection	FD9189-HM: Five-window video motion detection
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in)	VCA	Standard VCA (optional) *Including line crossing detection, field detection, loitering detection
		VADP Package	Trend Micro IoT Security, Smart Motion Detection*, Stratocast(support) *Smart Motion Detection is only for FD9189-H, FD9189-HT.
		Alarm and Event	

Technical Specifications

Alarm Triggers	Motion detection, manual trigger, periodical trigger, system boot, recording notification, camera tampering detection, audio detection, SD card life expectancy, shock detection, cybersecurity events (brute force attack event, cyberattack event, quarantine event)
Alarm Events	Event notification via email, HTTP, SMTP, FTP, NAS server and SD card File upload via email, HTTP, FTP, NAS server, SD card
General	
Connectors	RJ-45 cable connector for Network 10/100 Mbps PoE connection*1
LED Indicator	System power and status indicator
Power Input	IEEE 802.3af PoE Class 0
Power Consumption	FD9189-H: Max. 8.7 W (IR on) Max. 5.7 W (IR off) FD9189-HM: Max. 8.3 W (IR on) Max. 5.3 W (IR off) FD9189-HT: Max. 8.7 W (IR on) Max. 5.7 W (IR off)
Dimensions	Ø 130 x 95.3 mm
Weight	360 g
Safety Certifications	CE, FCC Class B, UL, LVD, VCCI, C-Tick
Operating Temperature	Starting Temperature: 0°C ~ 50°C (32°F ~ 122°F) Working Temperature: -10°C ~ 50°C (14°F ~ 122°F)

Humidity	90%
Warranty	36 months


System Requirements

Operating System	Microsoft Windows 8/7 Mac 10.12 (Chrome only)
Web Browser	Chrome 58.0 or above Internet Explorer 10/11
Other Players	VLC: 1.1.11 or above QuickTime: 7 or above

Included Accessories

Others	Quick installation guide, alignment sticker, screw pack
--------	---

Dimensions

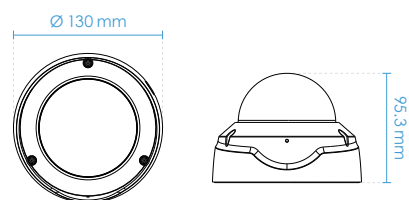

Compatible Accessories

Mounting Kits

 <p>AM-21A L-shape Bracket</p>	 <p>AM-51D Adapting Plate</p>	 <p>AM-528 Mounting Adaptor</p>
---	--	--

Ordering Information

Model	Description	Part Number
FD9189-H	5MP, 30fps, 2.8mm, 30M IR, Smart Stream III, -10°C ~ 50°C	100207100G
FD9189-HM*	5MP, 30fps, 2.8~12mm, 30M IR, Smart Stream III, -10°C ~ 50°C	100207200G
FD9189-HT*	5MP, 30fps, 3.7~7.7mm, 30M IR, Smart Stream III, -10°C ~ 50°C	100207300G

*The stock levels may vary by region. Please contact your local sales representative for further inquiry.



All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 6

6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C. | T: +886-2-82455282 | F: +886-2-82455532 | E: sales@vivotek.com | W: www.vivotek.com