


Aperio™ Online

Authorization updated in real time

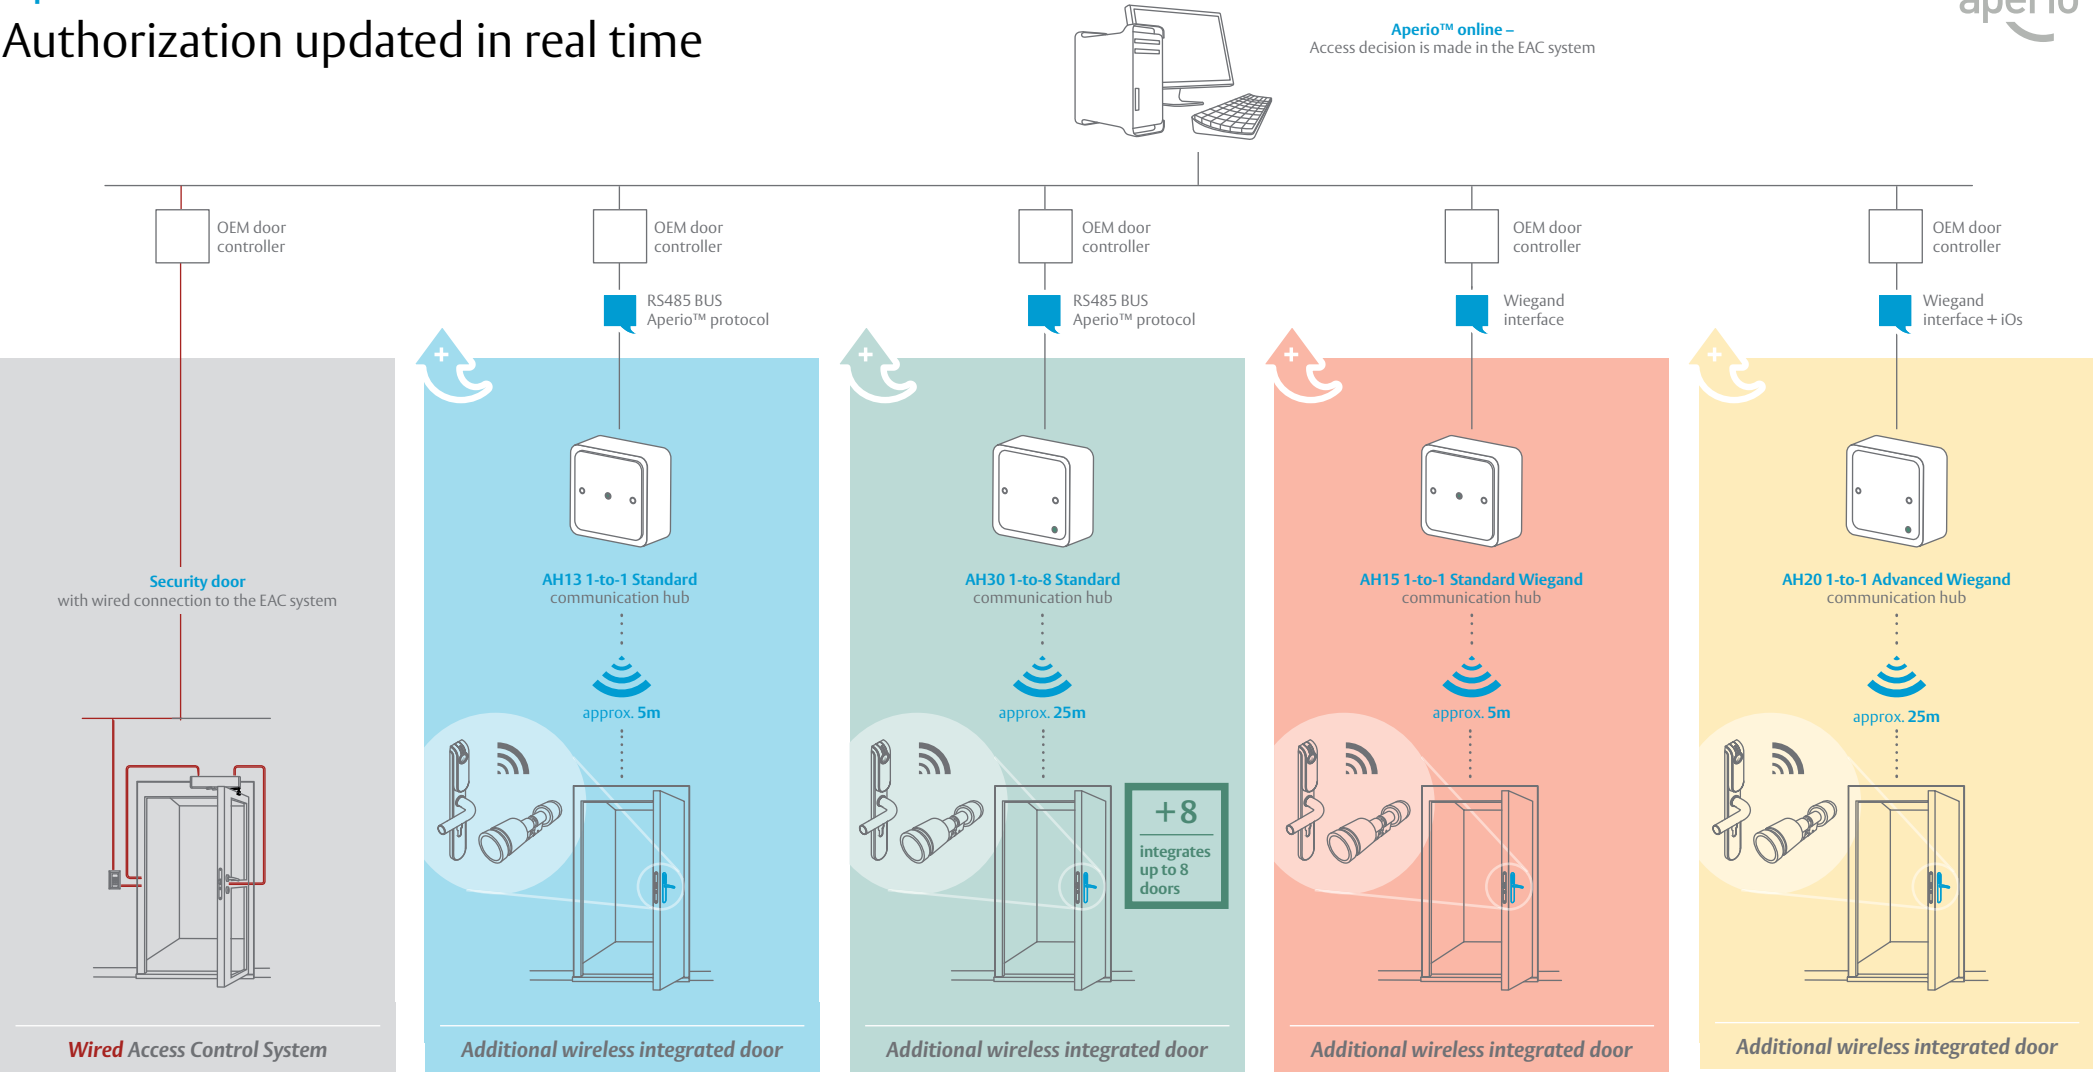

Caption

- Keep your existing system – Security door with wired connection to the EAC system
 - Add Aperio™ via RS485 – add one door with AH13 1-to-1 Standard communication hub
 - Add Aperio™ via RS485 – add 8 doors with AH30 1-to-8 Standard communication hub
 - Add Aperio™ via Wiegand – add one door with AH15 1-to-1 Standard Wiegand communication hub
 - Add Aperio™ via Wiegand – add one door with AH20 1-to-1 Advanced Wiegand communication hub
- Frequency IEEE 802.15.4 (2,4 GHz) - 128 bit AES encryption

Supported RFID technologies

	iCLASS® ISO 14443B	✓	MIFARE™	MIFARE DESFire	✓
MIFARE™	MIFARE classic	✓		(HID PROX / EM410x)	✓
MIFARE™	MIFARE plus	✓		Low Frequency 125 kHz	
			INDALA	(open format) Low Frequency	projected