



# Eventys Lite

Uniclass L7626	EPIC M231
CI/SfB (64.11)	X

## 4 and 8 channel Digital Video Recorders




# Eventys Lite Quality, Reliability and Speed



The new 4 and 8 channel Eventys™ Lite units are a compact addition to the existing 16 channel range of DVR's. They have been specially designed for small to medium installations, such as retail outlets, petrol stations or for general site monitoring, where high quality images, speed and reliability are paramount.

Using the latest MPEG-4 compression, combined with a LINUX operating system ensures that the Eventys lite 4 and 8 way models are fast, reliable and ideally suited for all smaller security applications.

- 31 days recording at highest quality recording
- 100pps (real time recording for 4 cameras)
- CD writer, USB and LAN / Network card built in
- 250 or 400gb Hard drive options
- VMD - Motion detection system
- Dome control over the Network and locally using the lite keyboard

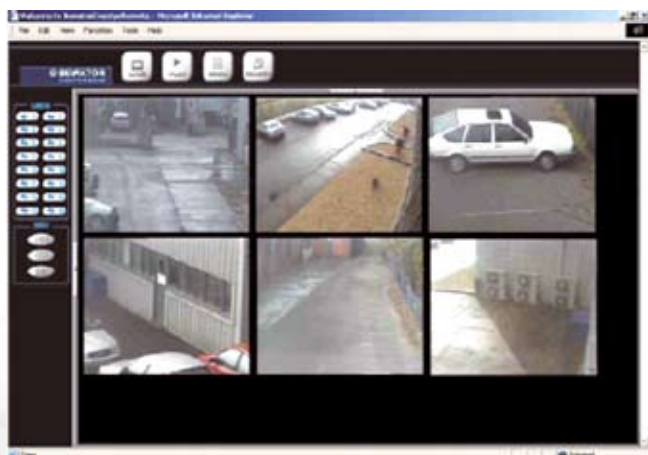

## Synchronised audio recording

The new 4 and 8 way Eventys Lite DVRs support multiple video and 2 audio channels recording simultaneously. Users can monitor and play back recorded data with both audio and image synchronously, for enhanced security and evidence gathering.

## Powerful network functions

Both 4 and 8 way channel models offer easy-to-use Internet accessibility, thanks to a built-in network interface. Remote monitoring, playback, system settings change, dome control over LAN.



Retail Outlets



Petrol Stations



Commercial Buildings



Education Premises



Leisure Facilities

## Eventys Lite features

- **Video Inputs:** 4 IP/BNC (4 Way version) or 8 IP/BNC (8 Way)
- **Video Standard:** PAL / NTSC
- **Video Outputs:** VGA (800x600, 1024x768, 1280x1024 @ 60Hz), Other (1 main monitor, 1 spot monitor)
- **Compression:** MPEG-4
- **Frame Rate/Resolution:** 100 ips @ 360 x 288, 50 ips @ 720 x 288, 25 ips @ 720 x 576
- **Media Export:** CD-RW, USB
- **Media Export Format:** AVI or Native DRV
- **Internal Storage Options:** 250 GB (4 Way version) or 400 GB (8 Way)
- **External Storage:** X2 IEEE-1394 (Firewire)
- **Audio:** 2 Channels

Your local Bewator distributor is:



**BEWATOR**  
 Bewator Ltd  
 Albany Street • Newport, South Wales • NP20 5XW  
 Tel: 01633 821000 (Switchboard) • Fax: 01633 820620  
 www.bewator.co.uk • E-mail: sales@bewator.co.uk

