

## DH-HAC-HFW2200D(-B)

2Megapixel 1080P Water-proof IR HDCVI Camera



### Features

- 1/3" 2Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switchable
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 8mm fixed lens (3.6 mm, 6mm, 12mm, 16mm optional)
- Max. IR LEDs length 50m, Smart IR
- IP66, DC12V
- Default with bracket (HFW2200D-B)



# DH-HAC-HFW2200D(-B)

## Technical Specifications

Model	DH-HAC-HFW2 200DP	DH-HAC-HFW2 200DN	DH-HAC-HFW2 200DP-B	DH-HAC-HFW2 200DN-B
<b>Camera</b>				
Image Sensor	1/3" 2Megapixel CMOS			
Effective Pixels	1920(H)×1080(V)			
Electronic Shutter	1/3(s)~1/100,000s			
Video Frame Rate	25/30/50/60fps@720P; 25/30fps@1080P			
Synchronization	Internal			
Min. Illumination	0.05Lux@F1.2 (AGC ON), 0Lux IR LED on			
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)			
<b>Camera Features</b>				
Max. IR LEDs Length	50m, Smart IR			
Day/Night	Auto(ICR) / Color / B/W			
Noise Reduction	2D/3D			
OSD Menu	Support			
<b>Lens</b>				
Focal length	8mm fixed lens (3.6mm, 6mm,12mm,16mm optional)			
Mount Type	M12			
<b>General</b>				
Power Supply	DC12V±10%			
Power Consumption	Max 8W			
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)			
Transmission Distance	Over 300m via 75-3 coaxial cable			
Ingress Protection	IP66			
Dimensions(W×D×H)	200.2mm×89.1mm×80.4mm		200.2mm×89.1mm×161.2mm	
Weight	0.45Kg		0.58Kg	
Others	N/A		Default: bracket included	

# DH-HAC-HFW2200D(-B)

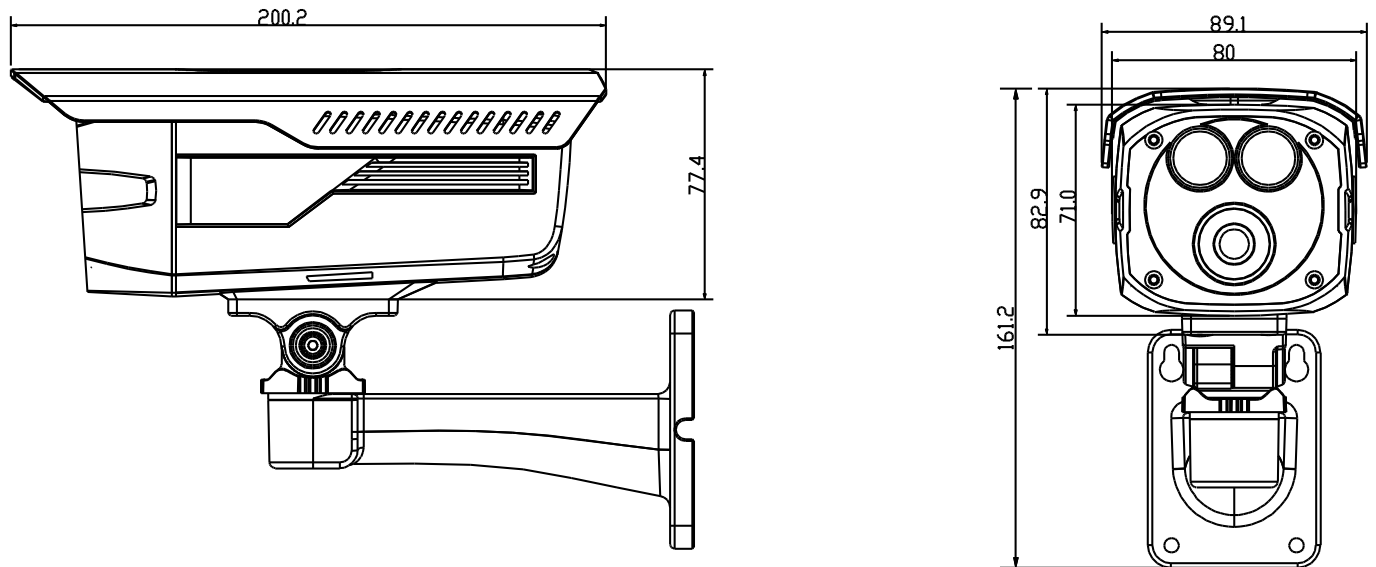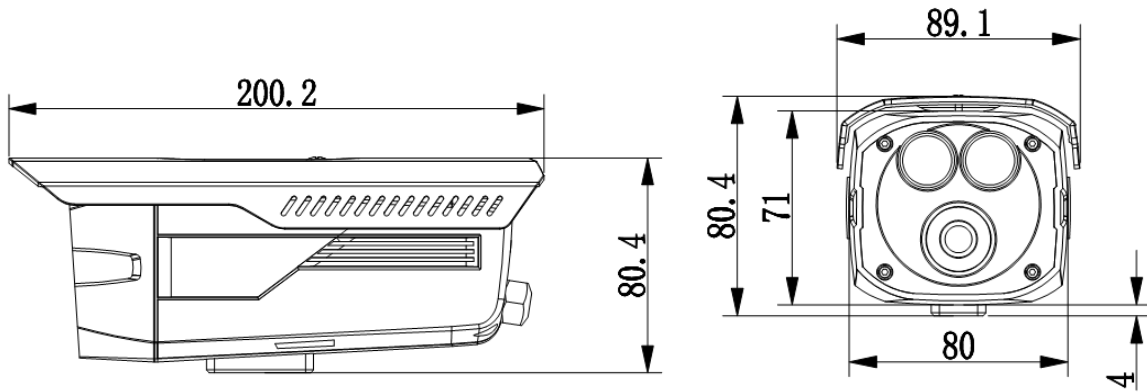

## Dimensions (mm)



## DH-HAC-HFW2200D(-B)

---

### Accessories (optional)

	
PFB120W	PFB121W

---

**Dahua Technology Co., Ltd.**

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.