

# ARC5408B-(C)W


## Wireless Video Alarm Controller



### Feature

- 8 channel wired alarm local input
- Up to 32 wireless sensors, the transmission distance is up to 1.2 km (open space/no interference)
- Up to 8 channel in Tribrid (Analog, HDCVI and IP Camera @720p)
- 1 channel linear audio input, 1 channel audio output
- 1 channel two-way talk
- 1 channel relay output, max 8 channel
- Support 3G(WCDMA) network report alarm event

### Dimension

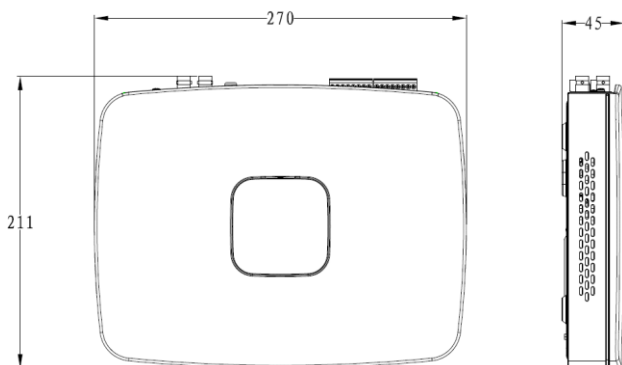

## Technical Specifications

Model	ARC5408B-(C)W
Wired Alarm Input	8-ch alarm local input
Wireless Sensor Number	32-ch (433MHz)
Alarm Output	1-ch relay output (30VDC 1A), extend to 8-ch
Wireless Remote Control Number/Distance	16, the transmission is up to 80m (open space/no interference)
User Management	1 installer user, 1 administrator, 1 duress user, 20 operator users
Video in/out	input: 4-ch in Tribrid (HDCVI, SD and digital 720P, hybrid input) output: 1 VGA
Video Compression and Quality	H.264, up to 1080P, Each channel can have two streams
Video Playback	Support up to 4-ch @720P (or 2-ch 1080P)
Motion Detect	Each screen can set 396 (22*18) detection areas; multi-level sensitivity; 1-6 optional
Region Masking	4 regions for each channel
Audio coding standard	G.711A
Audio in/out	1-ch linear audio input/1-ch linear audio output
Audio talk	1-ch multiplex audio talk
USB	1 USB2.0
HDD	1 SATA 2.5 inch
Network	1-ch 10M/100M Ethernet port, RJ45 port -C (WCMDDA 3G network)
Protocol	TCP/IP
Log	5000
Independent Security service center	2 groups phone call security center 1 group active registration center 2groups network security center
Siren	Support
PSTN Detect	Support
Anti-cut, Anti-circuit	Support
SMS	-C Support
Remote Upgrade	Support
Tamper Alarm	Vandal proof
Load Capability	12VDC 0.5A 12VDC 1.0A
Siren output power	12VDC 0.5A
Alternate Power	External: +12V 7AH Lead-acid battery Internal: 11V 5200mAh lithium battery
Power	220AC~/<7W (No HDD)

## ARC5408B-(C)W

---

Working Environment	-10°C~+55°C
Overall dimensions\weight	270L*205W*40H mm/<2kg
Installation	Wall mounting