

DH-CA-DB480B

700TVL Vandal-proof Dome Camera



Features

- 1/3" SONY Super HAD CCD II & Effio-E DSP
- High resolution of 700TVL
- DWDR, Day/Night, 2DNR, Auto iris, AWB, AGC,BLC, MD, Privacy Masking, Picture Adjustment
- 4~9mm varifocal lens (2.8~12mm optional)
- OSD, IK10, IP66, DC12V(-A model: DC12V/AC24V dual power supply)


DH-CA-DB480B

Technical Specifications

| Model | DH-CA-DB480BP(-A) | DH-CA-DB480BN(-A) |
|------------------------|--|------------------------------|
| Camera | | |
| Image Sensor | 1/3" Super HAD CCD II | |
| Effective Pixels | 976(H) x 582(V), 570K pixels | 976(H) x 494(V), 480K pixels |
| Horizontal Resolution | 700TVL | |
| Electronic Shutter | 1/50s~1/100,000s | 1/60s~1/100,000s |
| Synchronization | Internal | |
| Min. Illumination | 0.05Lux@F1.4 | |
| S/N Ratio | >60dB | |
| Video Output | 1Vp-p Composite Output (75Ω/BNC) | |
| Camera Features | | |
| OSD | English, Chinese, French, German, Russian, Spanish, Portuguese, Japanese | |
| Day/Night | Auto(Electronic) / Color / B/W | |
| Backlight Compensation | BLC / HLC / DWDR | |
| White Balance | Auto Trace WB1 / Auto Trace WB2 / Manual / Auto | |
| Gain Control | Auto / Manual | |
| Noise Reduction | 2D | |
| Privacy Masking | Up to 4 areas | |
| Picture Adjustment | Mirror / Brightness / Contrast / Sharpness / Hue / Gain | |
| Lens | | |
| Focal Length | 4~9mm (2.8~12mm optional) | |
| Focus Control | Manual | |
| Lens Type | Manual / Auto Iris | |
| Mount Type | Φ14 | |
| General | | |
| Power Supply | DC12V±10% (-A model: DC12V/AC24V dual power supply) | |
| Power Consumption | Max 3W | |
| Working Environment | -30°C~+60°C / 20%~80%RH | |
| Protection Level | IK10, IP66 | |
| Dimensions | Φ160mm × 118.5mm | |
| Weight | 980g (-A: 1000g) | |

DH-CA-DB480B

Dimensions (mm)

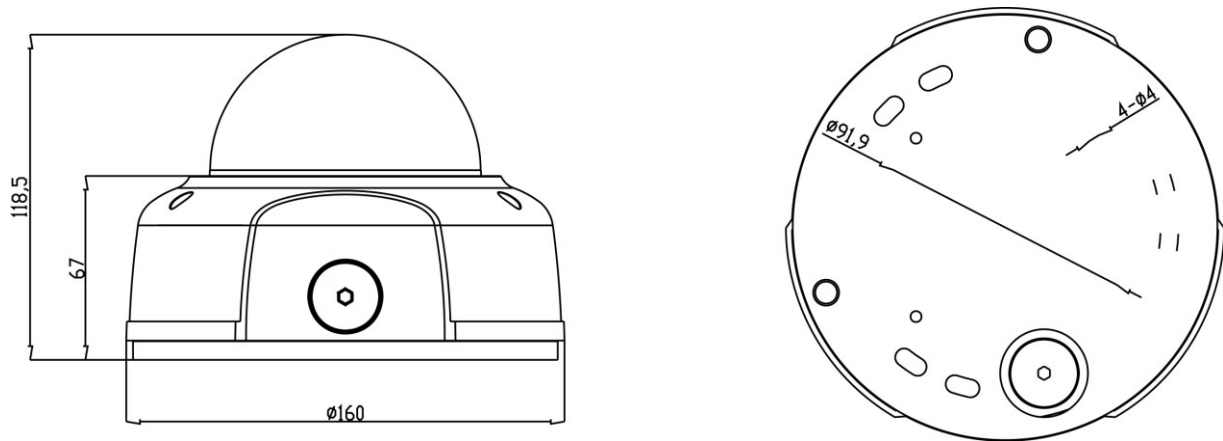

Accessories (optional)



Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.